# **FOST** 30

#### **Features**

Glasswasher with 35x35 cm rack with electromechanical user interface, constructed with partial double-skin side panels with deep-drawn rounded rack guides and full double-skin door. The welded tank is equipped with an integral filter made from composite material. The wash chamber is free of internal pipes and sharp corners.

The washing function is performed by the lower spray arm only. The low height of the machine combined with the wide door opening make it the ideal solution for smaller establishments which need to wash tall glasses. Standard equipment includes the peristaltic rinse aid dispenser, which can be adjusted from the control panel.



#### **Technologies**













#### **Versions**

Model		Code
Fast 30		917400
Fast 30S	built-in water softener	917401
Fast 30D	peristaltic detergent dispenser	917403
Fast 30E	partial drain with pump	917404
Fast 30DE	peristaltic detergent dispenser and partial drain with pump	917405










#### Technical data

Dimensions (WxDxH)	cm	40.1x49x59.5
Door opening height	cm	26
Rack size	cm	35x35
Effective productivity*	racks/h	30 (35 with hot water)
Theoretical productivity	racks/h	40
Tank capacity	1	7
Boiler capacity	1	2.6

Tank element	kW	0.6
Boiler element	kW	2.6
Wash pump	kW	0.15
Drain pump	kW	0.04
Inlet water pressure	bar	2 → 4
Inlet water temperature	°C	50 → 60

# Installation diagram

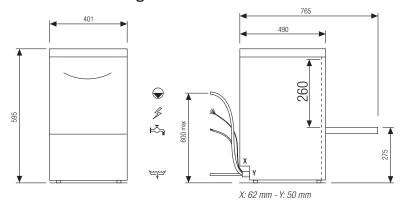

# Power supply

Installed power	Amp	kW
230 V - 50Hz - 1N ph	16	3.5

# Packaging specs

Gross weight	Kg	30
Cubic volume	$m^3$	0.19
Dim. (WxDxH)	cm	47x56x74



### Programs menu

PROGRAM	MAIN USE	Min. consumption. I/cycle	Duration sec.	Wash °C	Rinse °C	Fast 30 - 30S - 30R - 30D	Fast 30E - 30DE
ProSpeed	Light, fresh soiling	1,6	90	60	65	•	•
<b>ProFessional</b>	General use	1,6	120	60	65	•	•
ProClean	Self-clean	12 - 15	300	-	-	•	•
ProDrain	Automatic draining	-	90-120	-	-		•

### Options

		Code	
	Drain pump kit	999354	160,00
000	Peristaltic detergent dispenser kit	999347	190,00

#### Standard racks

		Code	n.
	Square glasses rack	780138	2
V	Cutlery basket for all versions	780139	1

<sup>\*</sup> Water supply at 15°C, 12" for rack loading and unloading.