

Item No	:	Qty	:
Electrical	:	Volt	:
Options	:		
Price	:		

## Hood Dishwasher



### Features:

- ▶ **CLEANLINESS AND HYGIENE**  
Sparkling clean. Hygienically clean. The P50 guarantees first-class washing quality. For cleanliness and hygiene of the highest standard.
- ▶ **POWERFUL AND EFFICIENT**  
Short heat-up times and short washing cycles: hood up, rack out, new rack in, hood down. The P50 is designed for speed and economic efficiency.
- ▶ **SIMPLE TO USE**  
Self-explanatory colour display. Only two different washing programmes. Temperature display. Operation of the P50 is easy and intuitive.
- ▶ **EASY SERVICING**  
Fast maintenance and troubleshooting: the integrated error management system and simple access to the components make the P50 particularly easy to service.

### Model : P-50

#### Specifications :

Number of Program	:	2
Theoretical Capacity <sup>3</sup>	:	60/20 racks/h
Tank Heating	:	2.5 kW
Boiler Heating	:	9 kW
Capacity Tank	:	28 Litre
Rinse Water Consumption	:	2.4 Litre
Tank temperature	:	62°C / 66°C
Rinse Temperature	:	85°C
Packaging Dimension	:	770 x 880 x 1605mm
Machine Dimension	:	635 x 750 x 1480 mm
Rack Dimensions	:	500 x 500 mm
Weight (Nett / Gross)	:	98 / 123 Kg

\* Continuing research results in steady improvements; therefore, these specifications are subject to change without prior notice.



#### PT MULTI FLASHINDO KARISMA

##### Jakarta


Jl. Hayam wuruk 114 Blok A No. 4  
Jakarta - Indonesia 11160  
Telp. (021) 626 8758,  
Fax. (021) 625 8473

##### Surabaya :

Jl. Saronu Jiwo No.4  
Surabaya - Indonesia 60299  
Telp. (031) 847 1460,  
Fax. (031) 847 1474

##### Service Center :

Jl. Kamal Raya No.9 RT01/06, Tegal Alur - Cengkareng  
Telp. (021) 5595 2523/ 2952 8135  
Fax. (021) 5595 7271  
Email: service.center@mfk.co.id

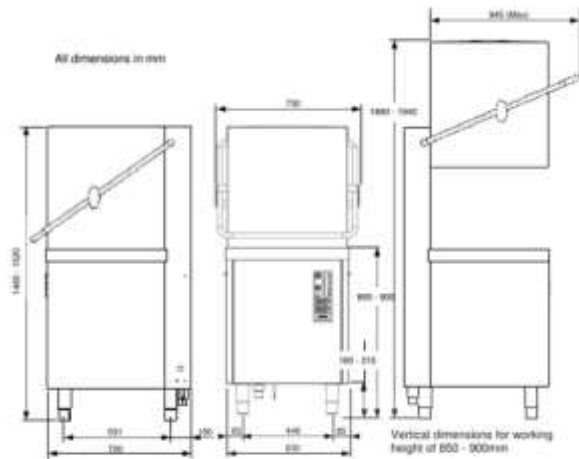

## Dimensions

Width x depth:	630 x 720 mm
Height hood closed:	1,460 mm
Height hood open:	1,890 mm
Rack dimensions:	500 x 500 mm
Clear entry height:	410 ± 5 mm
Water connection:	G ¾"
Waste water connection:	ø 50 mm

## General data

Weight Standard (net / gross):	83 / 95 kg
Tank capacity:	39 l
Circulating pump:	380 l/min
Noise emission:	<70 dB(A)

**Max. theoretical capacity**  
**Racks / h: 60 120 sec. / 60 sec.**  
**Plates / h: 960**  
**Glasses / h: 1500**

**Cycle duration : 120 sec. / 60 sec.**

**Rinse water consumption** (under ideal conditions)  
 2.9 l per rack

## Water connection

Flow pressure:	1.0 – 6.0 bar
Flow rate:	at least 8 l/min.
Water inlet temp.:	max. 60° C

**Weight pressure point per foot**  
 Max. 40 kg

## Extraction

Cubic metres / h:	20
Relative humidity:	100 %
Temperature:	60 °C



## PT MULTI FLASHINDO KARISMA

### Jakarta

Jl. Hayam wuruk 114 Blok A No. 4  
 Jakarta - Indonesia 11160  
 Telp. (021) 626 8758,  
 Fax. (021) 625 8473

### Surabaya :

Jl. Saronu Jiwo No.4  
 Surabaya - Indonesia 60299  
 Telp. (031) 847 1460,  
 Fax. (031) 847 1474

### Service Center :

Jl. Kamal Raya No.9 RT01/06, Tegal Alur - Cengkareng  
 Telp. (021) 5595 2523/ 2952 8135  
 Fax. (021) 5595 7271  
 Email: service.center@mfk.co.id