





- Output of meat per hour = 60kg
- · Cast iron steel interior retains heat within the oven
- Piracold refrigeration system
- Fitted with hinged glass door glass door will withstand temperatures up to 750°C
- Glass door allows you to view products being cooked this means you don't have to keep opening the door so
 maintaining the oven temperature and helping to reduce charcoal consumption.
- Fully insulated oven chamber
- · Fitted with thermometer
- Fitted as standard with internal Air flow control and Firebreak prevents fire exiting the oven and going into the
 extract canopy. These devices can be supplied as well in external version.
- Can be used with all types of charcoal; Coconut charcoal, mineral charcoal...
- Air flow entrance control and smokes exit control, included
- Ash collection tray
- Grease collection tray
- Supplied with 4 adjustable legs.
- Supplied with 1 stainless steel grid 585 x 465, 1 x meat tongs + 1 x poker.
- · Can be supplied in Black version, or can be finished with stainless steel version.
- Possibility to cook with grooved grill 515 x 470 that allows you to cook without fear of flames and fires in delicate foods (fishes, some vegetables) or greasy foods (chicken, duck ...).

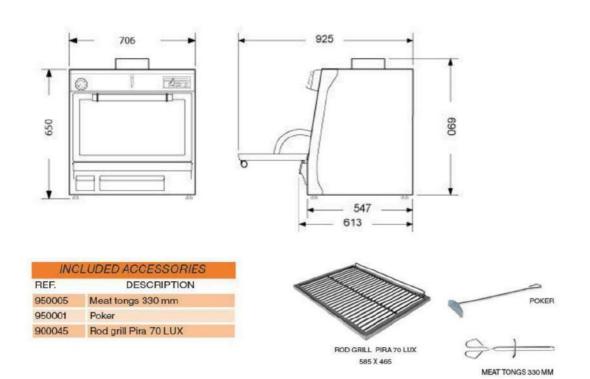

	ACCESSORIES					
REF.	DESCRIPTION					
750002	External airflow regulator					
750003	External firebreak					
750004	Inox hat					
750001	Coupler ring					
770145	Coal bunker table Pira 70 LUX					
901045	Grooved grill Pira 70 LUX					
904507	Glass screen protector Pira 70 LUX inox					
750005	Adapter					
750006	Black hat					
920045	Warming tray for dishes Pira 70 LUX					
960045	Griddle plate Pira 70 LUX					





GROOVED GRILL PIRA 70 LUX 515 X 470







WARMING TRAY PIRA 70 LUX



RECOMMENDED PIRA EXTRACTION HOOD Inverter and intermediate air chamber REF. DESCRIPTION

711011 Inox hood 1000 x 1100 790011 Fan motor 12/6 2 HP 790020 Fire fighting system

FHED	ATION	1014	OVEC	1000	200
FILLS	$\Delta I = I \cap I \cap I$	$V \sim IV/I$	OKES I	/ (H) (IHS
F. Change S. S.					~ 10

REF. DESCRIPTION 700010 FUO 4000P 700020 ODORLESS 4000P



PT MULTI FLASHINDO KARISMA

Jl. Hayam wuruk 114 Blok A No. 4 Jakarta - Indonesia 11160 Telp. (021) 626 8758, Fax. (021) 625 8473

Surabaya:

Jl. Sarono Jiwo No.4 Surabaya - Indonesia 60299 Telp. (031) 847 1460, Fax. (031) 847 1474

Service Center:

Jl. Kamal Raya No.9 RT01/06, Tegal Alur - Cengkareng Telp. (021) 5595 2523/ 2952 8135 Fax. (021) 5595 7271 Email: service.center@mfk.co.id















