

Item No	:	Qty	:
Electrical	:	Volt	:
Options	:		
Price	:		

Undercounter Warewasher



Features:

- ▶ **SIMPLE TO USE**
Start button for 1-button operation. Automatic self-cleaning programed. Temperature display. Operation of the U50 is easy and intuitive.
- ▶ **CLEANLINESS AND HYGIENE**
Sparkling clean. Hygienically clean. The U50 guarantees first-class wash results. For cleanliness and hygiene of the highest standard.
- ▶ **ECONOMICAL AND EFFICIENT**
Double-skinned design. Effective filtration. Smaller tank volume for fast start. The U50 is designed for extremely cost-effective operation.
- ▶ **EASY SERVICING**
Fast maintenance and troubleshooting: the integrated error management system and simple access to the components make the U50 particularly easy to service.

Model : U 50

Specifications :

Number of Program	:	2
Voltage / Watts	:	220 - 240 V / 1N~, 50 Hz
Watts	:	0,84 kW
Capacity / Hour	:	30 Racks / 1 Hour
Capacity Tank	:	15.3 Liter
Tank temperature	:	62-66 derajat
Machine Dimension	:	60 x 60 x 83 cm
Rack Dimensions	:	50 x 50 cm
Weight Net/Gross	:	64/74 kg

* Continuing research results in steady improvements; therefore, these specifications are subject to change without prior notice.



PT MULTI FLASHINDO KARISMA

Jakarta


Jl. Hayam wuruk 114 Blok A No. 4
Jakarta - Indonesia 11160
Telp. (021) 626 8758,
Fax. (021) 625 8473

Surabaya :

Jl. Saronno Jiwo No.4
Surabaya - Indonesia 60299
Telp. (031) 847 1460,
Fax. (031) 847 1474

Service Center :

Jl. Kamal Raya No.9 RT01/06, Tegal Alur - Cengkareng
Telp. (021) 5595 2523/ 2952 8135
Fax. (021) 5595 7271
Email: service.center@mfk.co.id

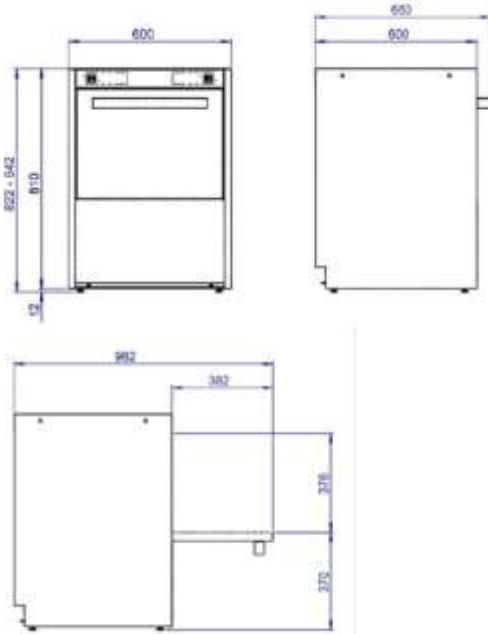

Dimensions

Width x depth:	600 x 600 mm
Height:	822 mm
Depth with door open:	982 mm
Rack dimensions:	500 x 500 mm
Clear entry height:	376 mm
Water connection:	G 3/4"
Waste water connection:	ø 32 mm

General data

Weight:	52.5 kg
Tank capacity:	18 l
Circulating pump:	380 l/min
Noise emission:	max. 70 dB(A)
Splash guard:	IPX3

Max. theoretical capacity

Version 1	
Racks / h:	30
Plates / h:	540

Version 2	
Racks / h:	20
Plates / h:	360

Rinse water consumption

2.75 – 3.25* litres per rack

Temperature

Wash water temp.:	60 °C
Rinse water temp.:	85 °C

Cycle duration

Version 1:	120 sec.
Version 2:	180 sec.

Water connection

Flow pressure 0 – 2 bar:	rinse booster pump required
Flow pressure 2 – 4 bar:	no modifications required
Flow pressure 4 – 6 bar:	flow restrictor required
Flow pressure 6 bar plus:	pressure reducing valve required
Flow rate:	at least 8 l/min.
Water inlet temp.:	4 - 60° C

Electrical values

Voltage	Fuse protection	Tank heating	Total connected load	Boiler heating	Pumps + Control unit
220 - 240 V / 1N~, 50 Hz	32 A	2 kW	6.84 kW	6 kW	0.84 kW
380 - 415 V / 3N~, 50 Hz	16 A	2 kW	6.84 kW	6 kW	0.84 kW



PT MULTI FLASHINDO KARISMA

Jakarta

Jl. Hayam wuruk 114 Blok A No. 4
Jakarta - Indonesia 11160
Telp. (021) 626 8758,
Fax. (021) 625 8473

Surabaya :

Jl. Saroni Jiwo No.4
Surabaya - Indonesia 60299
Telp. (031) 847 1460,
Fax. (031) 847 1474

Service Center :

Jl. Kamal Raya No.9 RT01/06, Tegal Alur - Cengkareng
Telp. (021) 5595 2523/ 2952 8135
Fax. (021) 5595 7271
Email: service.center@mfk.co.id