

## Winterhalter P50 Pass Through warewasher

### General information:

With its high performance, the **single skinned, electro-mechanical rack pass through dishwasher** is designed for straight through or corner operation and to be used in conjunction with ancillary tabling. The **programme switch** guarantees a simple and user friendly mechanical operation. The P50 is a highly effective machine, fitted with **rotating wash arms**. The **collision wash jets** with its high-power nozzles provide **maximum washing power** and guarantee the best cleaning results. The P50 is ideal for high volume catering and hospitality dishwashing – perfect for the busy commercial kitchen wash up area.

### Features:

- Non pressurised boiler for rinsing
- Temp gauges
- Two wash programmes (2min./1min.)
- Self-draining programme
- Clear entry height 410 mm
- Auto hood start
- Easy removable wash arms for a simple cleaning of the machine
- Rear cover
- 12 kW Boiler heater
- Vermin tray



### Your benefits are:

- Best dishwashing results
- Easy operation
- Low operating costs
- Energy efficiency
- Short wash-cycle-time
- Modern and compatible design
- High service friendliness


### Options:

- Rinse aid pump
- Detergent pump
- Drain pump



# Winterhalter P50

## Pass Through warewasher

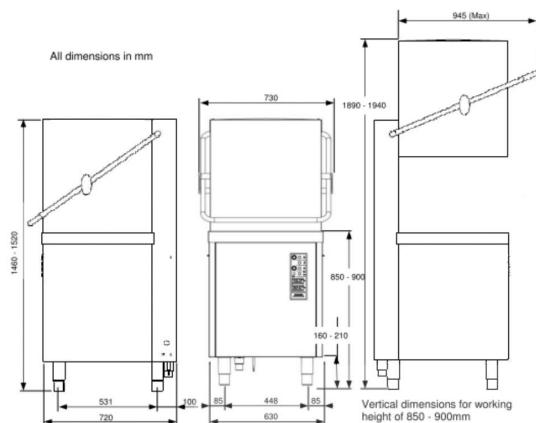

### Dimensions

|                         |              |
|-------------------------|--------------|
| Width x depth:          | 630 x 720 mm |
| Height hood closed:     | 1,460 mm     |
| Height hood open:       | 1,890 mm     |
| Rack dimensions:        | 500 x 500 mm |
| Clear entry height:     | 410 ± 5 mm   |
| Water connection:       | G 3/4"       |
| Waste water connection: | ø 50 mm      |

### General data

|                                |            |
|--------------------------------|------------|
| Weight Standard (net / gross): | 83 / 95 kg |
| Tank capacity:                 | 39 l       |
| Circulating pump:              | 380 l/min  |
| Noise emission:                | <70 dB(A)  |

### Max. theoretical capacity

|              |      |
|--------------|------|
| Racks / h:   | 60   |
| Plates / h:  | 960  |
| Glasses / h: | 1500 |

### Cycle duration

|                    |
|--------------------|
| 120 sec. / 60 sec. |
|--------------------|

### Rinse water consumption (under ideal conditions)

2.9 l per rack

### Water connection

|                    |                   |
|--------------------|-------------------|
| Flow pressure:     | 1.0 – 6.0 bar     |
| Flow rate:         | at least 8 l/min. |
| Water inlet temp.: | max. 60° C        |

### Weight pressure point per foot

Max. 40 kg

### Extraction

|                    |       |
|--------------------|-------|
| Cubic metres / h:  | 20    |
| Relative humidity: | 100 % |
| Temperature:       | 60° C |

### Electrical values

| Voltage                    | Fuse protection | Tank heating | Total connected load | Boiler heating | Pumps + Control unit |
|----------------------------|-----------------|--------------|----------------------|----------------|----------------------|
| 380 - 415 V / 3N~, 50/60Hz | 22 A            | 4.8 kW       | 12.84 kW             | 12.0 kW        | 0.84 kW              |



### PT MULTI FLASHINDO KARISMA

#### Jakarta

Jl. Hayam Wuruk 114 Blok A No. 4  
Jakarta - Indonesia 11160  
Telp. (021) 626 8758,  
Fax. (021) 625 8473

#### Surabaya :

Jl. Sarono Jiwo No.4  
Surabaya - Indonesia 60299  
Telp. (031) 847 1460,  
Fax. (031) 847 1474

#### Service Center :

Jl. Kamal Raya No.9 RT01/06, Tegal Alur - Cengkareng  
Telp. (021) 5595 2523/ 2952 8135  
Fax. (021) 5595 7271  
Email: service.center@mfk.co.id