



TRANSFORMERS

900 & 700 MODULAR COOKING RANGE (FLOOR TYPE)

CATALOG 2023



Safe and stable: with imported gas valve, thermocouple, flame-out safety protection devices, stable performance and high security;

Easy to clean: stretch forming worktop, to avoid corners of hygiene;


Unique craft: high reinforcement technology applied on the ovens; instead of traditional seal, the sealing performance is more strong, durability is better;

Varied Gas sources: nozzles could be transformed and meet different needs;

Stainless steel adjustable feet: adjustable within plus or minus 25 mm, available for uneven grounds.

四头燃气煲仔炉连电焗炉 Gas Range With 4-Burner & Electric Oven



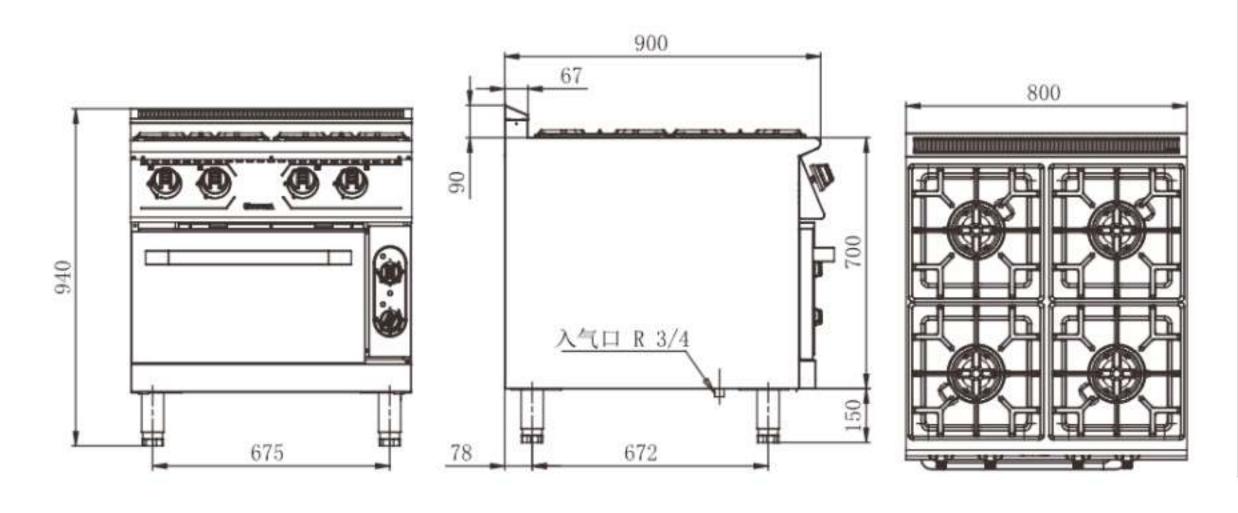

型号Model	热功率Power(kw)	电压Volts (V)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Cor	sumption
SPTT26-V9-TQ-4 (天然气)	6.5 × 4+4.8	200	800×900×(850+90) 136 / 181 焗炉尺寸/Oven Dimension: 560×700×270		液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20-V9-TQ-4 (液化气)	5x4+4.8	380			1.66	2.75

配件: 烤箱烤网1个 Accessories: Oven wire rack: 1

特点


- 炉头手工点火,坚固耐用。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。重型炉架,超长炉 柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。
- 焗炉带温度控制及超温保护功能,最高限温275 度。
- 焗炉分上下加热区,可独立温控控制,节约能源。


Features


- Manual ignition of furnace head, strong and durable.lar flame ensures high efficiency.
- · The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.
- · The oven offers temperature control and flame failure protection functions to achieve even temperature distribution. The highest temperature can reach 275 °C.
- · The oven is divided into upper and lower heating areas, which can be controlled by independent temperature control to save energy.

四头燃气煲仔炉连焗炉 Gas Range With 4-Burner & Gas Oven



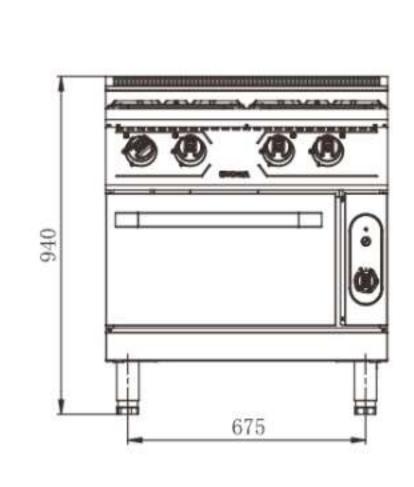

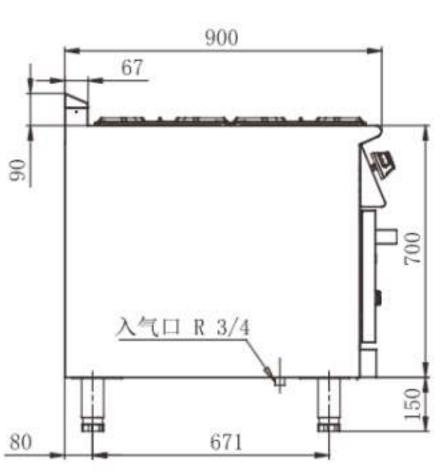

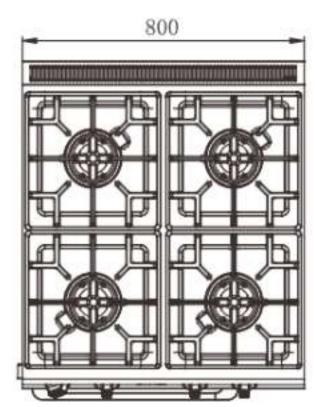

型号Model	热功率Power(kw)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Co	nsumption
SPTT26+KXT5.8-V9-RQ-4 (天然气)	6.5 × 4+5.8	450 / 040	800 × 900 × (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20+KXY5.8-V9-RQ-4 (液化气)	5x4+5.8	150 / 213	焗炉尺寸/Oven Dimension: 560×700×270	2.14	3.36

配件: 烤箱烤网1个 Accessories: Oven wire rack: 1

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。
- 重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。
- 烤箱带温度控制及熄火保护功能,温度均匀,最高限温330度。
- · 管状燃烧器5.8KW,有自稳火苗功能,如果燃烧器意外熄灭会 自动关闭。


(Features)

- · The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- · The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.
- · The oven offers temperature control and flame failure protection functions to achieve even temperature distribution. The highest temperature can reach 330 °C.
- The tubular burner is 5.8kw and has the function of self stabilizing flame. If the burner goes out accidentally, it will be closed automatically.



── 四头燃气煲仔炉连柜座 Gas Range 4-Burner With Cabinet



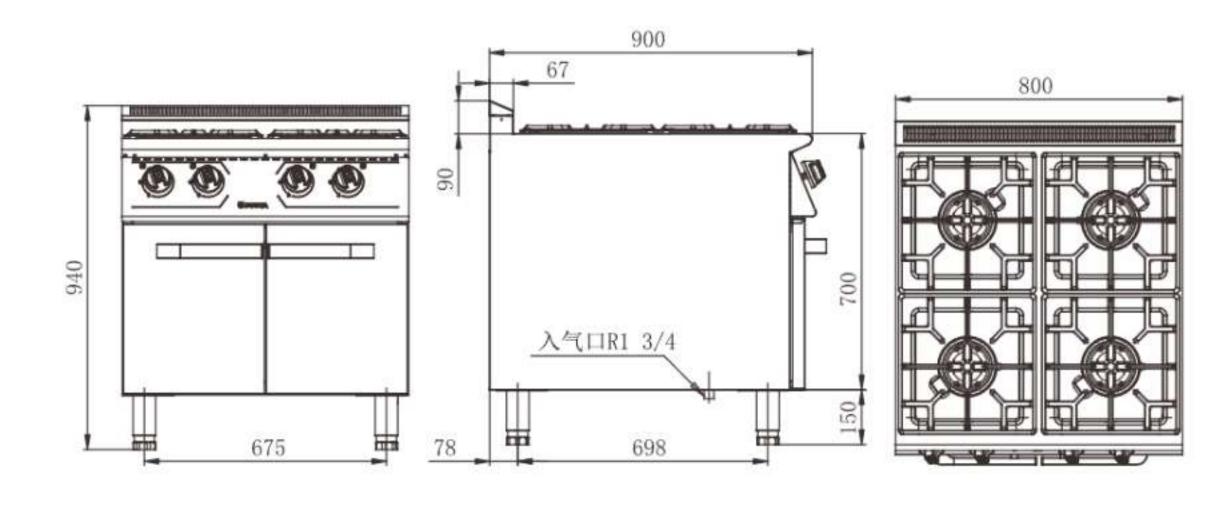

型号Model	热功率Power(kw)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Cor	nsumption
SPTT26-V9-RA-4 (天然气)	6.5×4		800 × 900 × (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20-V9-RA-4 (液化气)	5.4x4	136 / 167	000 × 300 × (030+30)	1.66	2.75

特点


- 炉头手工点火,坚固耐用。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。重型炉架,超长炉 柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。

[Features]

- · Manual ignition of furnace head, strong and durable.lar flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.

六头燃气煲仔炉连电焗炉 Gas Range With 6–Burner & Electric Oven



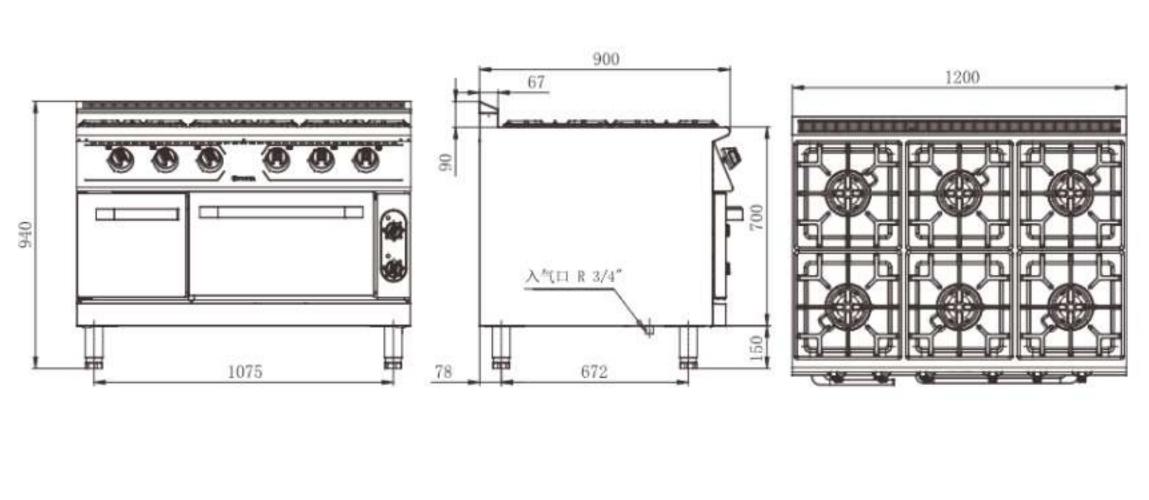

型号Model	热功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT39-V9-TQ-6 (天然气)	6.5 × 6+4.8	380	179 / 278	1200×900×(850+90) 焗炉尺寸/Oven Dimension:	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY30-V9-TQ-6 (液化气)	5x6+4.8	300	1737270	560 × 700 × 270	2.49	4.13
而以外,此文在阿力		.Oven wire real				

配件: 烤箱网架1个 Accessories:Oven wire rack: 1


特点

- 炉头手工点火,坚固耐用。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。
- 电烤箱带温度控制及超温保护功能,最高限温 275度。
- 炉分上下加热区,可独立温控控制,节约能源。

- Manual ignition of furnace head, strong and durable lar flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.
- The oven offers temperature control and flame failure protection functions to achieve even temperature distribution. The highest temperature can reach 275 °C.
- The oven is divided into upper and lower heating areas, which can be controlled by independent temperature control to save energy.

六头燃气煲仔炉连焗炉Gas Range With 6-Burner & Oven



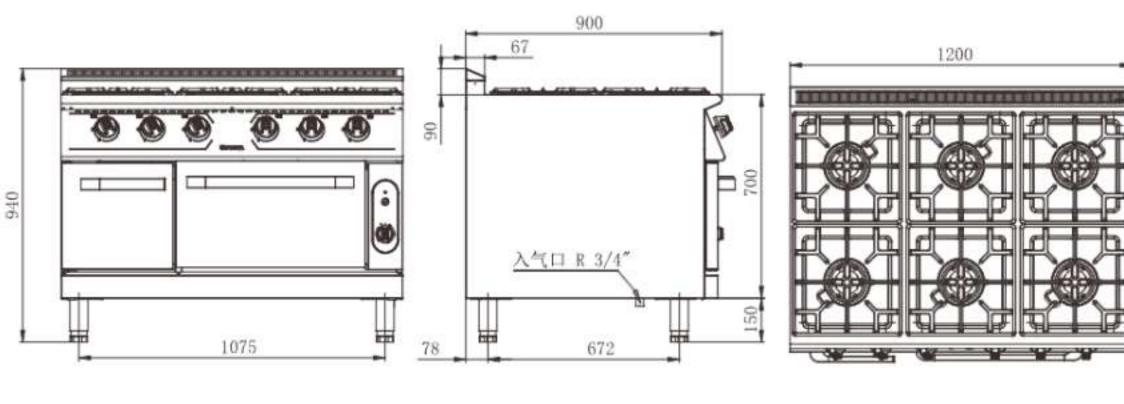

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas(Consumption
SPTT39+KXT5.8-V9-RQ-6 (天然气)	6.5 × 6+5.8	200 / 205	1200×900×(850+90) 焗炉尺寸/Oven Dimension:	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY30+KXY5.8-V9-RQ-6 (液化气)	5x6+5.8	208 / 235	560 × 700 × 270	2.97	4.74
配件: 烤箱网架1个	Accessories:Oven wir	e rack: 1			

配件: 烤箱网架1个

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。
- 重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。
- 烤箱带温度控制及熄火保护功能,温度均匀,最高限温330度。
- 管状燃烧器5.8KW,有自稳火苗功能,如果燃烧器意外熄灭会 自动关闭。


Features

- · The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- · The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.
- · The oven offers temperature control and flame failure protection functions to achieve even temperature distribution. The highest temperature can reach 330 °C.
- · The tubular burner is 5.8kw and has the function of self stabilizing flame. If the burner



六头燃气煲仔炉连柜座 Gas Range 6-Burner With Cabinet



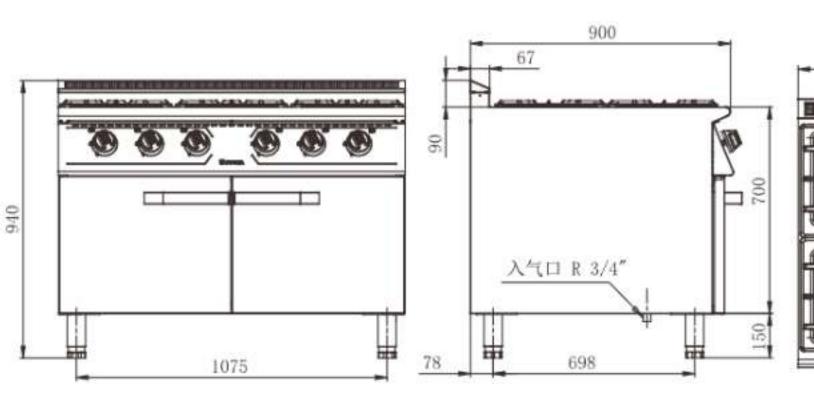

	紐	劉	\mathbb{B}	
Ñ				
	H	H	R	
			T.	

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT39-V9-RA-6 (天然气)	6. 5×6	149 / 235	1200 × 900 × (850+90)	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SPTY30-V9-RA-6 (液化气)	5×6	1407200	1200110011(000100)	2.49	4.13

- 炉头手工点火,坚固耐用。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。重型炉架,超长炉 柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。


(Features)

- Manual ignition of furnace head, strong and durable.lar flame ensures high efficiency.
- · The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · Stretch forming cooking surface, easy to clean.
- · Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.



四头燃气煲仔炉连柜座Gas Range 4-Burner With Cabinet



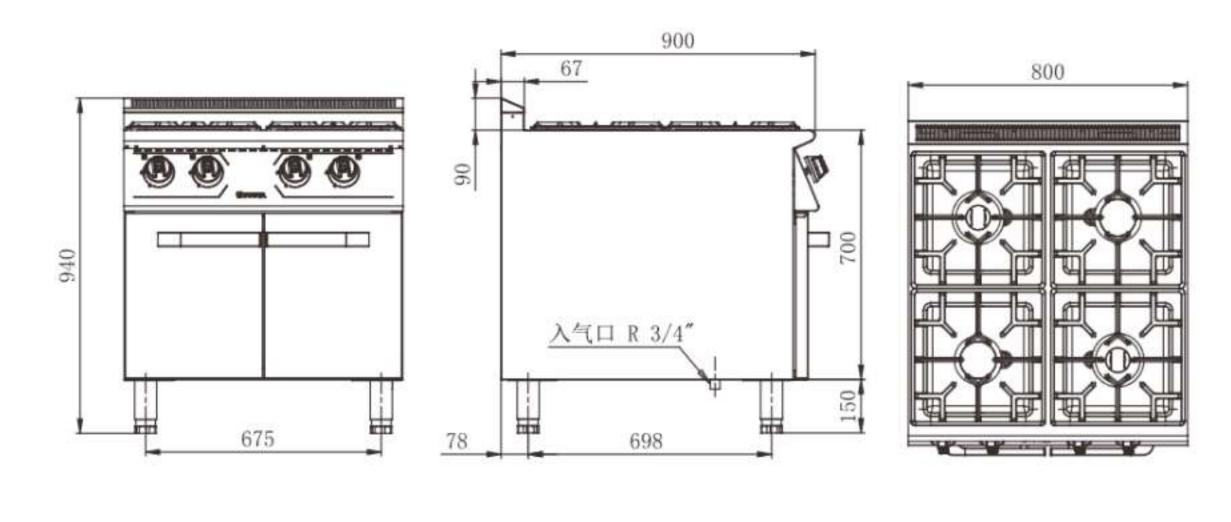

型号Model	热功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT24-V9S-RA-4 (天然气)	7.5 × 2+4.5 × 2		120 / 167	800 × 900 × (850+90)	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SPTY19-V9S-RA-4 (液化气)	5.6x2+4x2		1207 107	333 333 A (333 . 33)	1.6	2.54

特点


- 炉头功率多种且易于更换,有9KW、7.5KW、4.5KW。 3.5KW供客户选择。
- 炉头采用精密铸造, 镀硬铬加工而成, 火力稳定经久耐
- 炉头为花型火焰设计,效率高节能,火焰大小可调节。炉面模具拉伸成型,易于清洁。
- 炉头位于水盆凸起部位, 可防止溢出。
- 重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。

Features

- Burners with different power outputs (9KW, 7.5KW, 4.5KW and 3.5KW) are available and easy to replace.
- · The burners are manufactured through precision casting and plated with hard chrome to make sure that flames are stable and endurable.
- · The burners adopt flower pattern flame design to ensure high efficiency and save energy. Besides, the size of flames is adjustable.
- · Stretch forming cooking surface, easy to clean.
- · The burners are located in the projected part of the basin and prevent water from overflowing.
- · Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.

四头燃气煲仔炉连焗炉 Gas Range With 4-Burner & Gas Oven



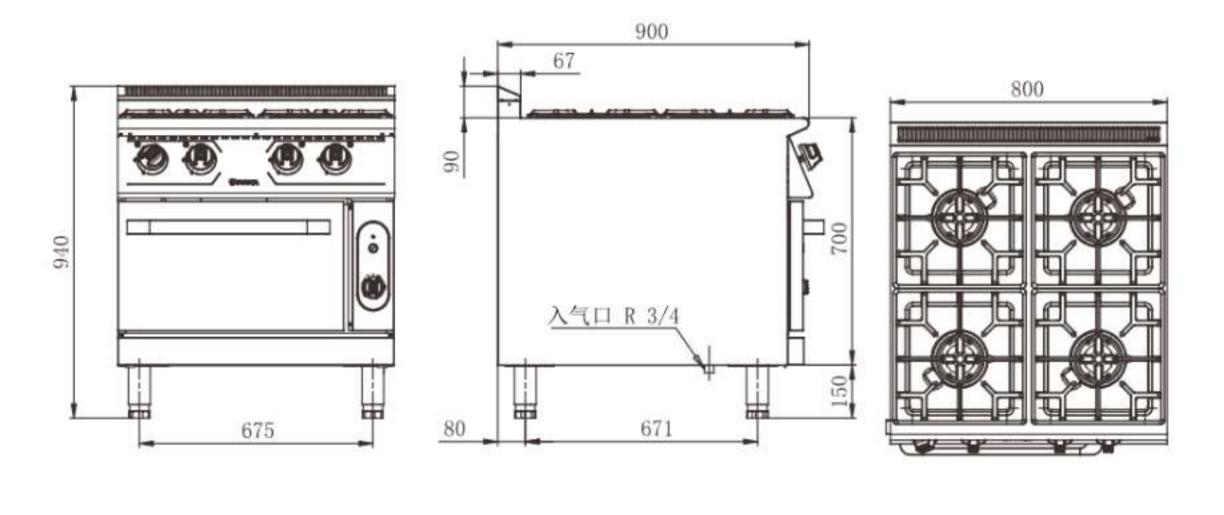

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT24+KXT5.8-V9S-RQ-4 (天然气)	7.5x2+4.5x2+5.8	155 / 213	800×900×(850+90) 焗炉尺寸/Oven Dimension:	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SPTY19+KXT5.8-V9S-RQ-4 (液化气)	5.6x2+4x2+5.8	100 / 210	560 × 700 × 270	2.08	3.06


特点

- · 炉头功率多种且易于更换,有9KW、7.5KW、4.5KW、 3.5KW供客户选择。
- 炉头采用精密铸造, 镀硬铬加工而成, 火力稳定经久耐
- 炉头为花型火焰设计,效率高节能,火焰大小可调节。
- 炉面模具拉伸成型,易于清洁。
- 炉头位于水盆凸起部位,可防止溢出。
- 重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。

- · Burners with different power outputs (9KW, 7.5KW, 4.5KW and 3.5KW) are available and easy to replace.
- · The burners are manufactured through precision casting and plated with hard chrome to make sure that flames are stable and endurable.
- · The burners adopt flower pattern flame design to ensure high efficiency and save energy. Besides, the size of flames is adjustable.
- · Stretch forming cooking surface, easy to clean.
- · The burners are located in the projected part of the basin and prevent water from overflowing.
- · Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.

六头燃气煲仔炉连柜座 Gas Range 6-Burner With Cabinet



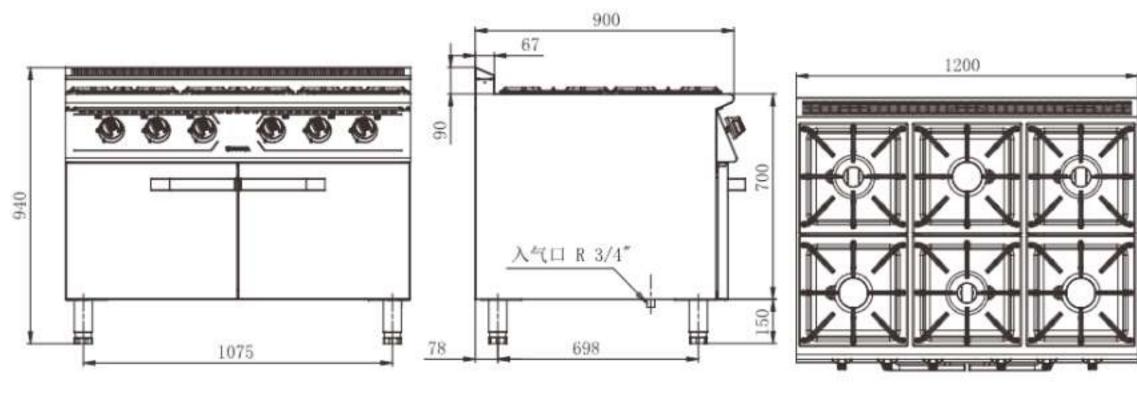

型号Model	热功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT24-V9S-RA-6 (天然气)	7.5 × 3+4.5 × 3	_	150 / 230	1200 × 900 × (850+90)	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SPTY20-V9S-RA-6 (液化气)	$5.6 \times 3 + 4 \times 3$		100 / 200		1.6	2.54

特点


- 炉头功率多种且易于更换,有9KW、7.5KW、4.5KW、 3.5KW供客户选择。
- 炉头采用精密铸造, 镀硬铬加工而成, 火力稳定经久耐
- 炉头为花型火焰设计,效率高节能,火焰大小可调节。
- 炉面模具拉伸成型,易于清洁。
- 炉头位于水盆凸起部位,可防止溢出。
- 重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。

Features

- Burners with different power outputs (9KW, 7.5KW, 4.5KW and 3.5KW) are available and easy to replace.
- · The burners are manufactured through precision casting and plated with hard chrome to make sure that flames are stable and endurable.
- · The burners adopt flower pattern flame design to ensure high efficiency and save energy. Besides, the size of flames is adjustable.
- · Stretch forming cooking surface, easy to clean.
- · The burners are located in the projected part of the basin and prevent water from overflowing.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.

六头燃气煲仔炉连焗炉 Gas Range With 6-Burner & Electric Oven



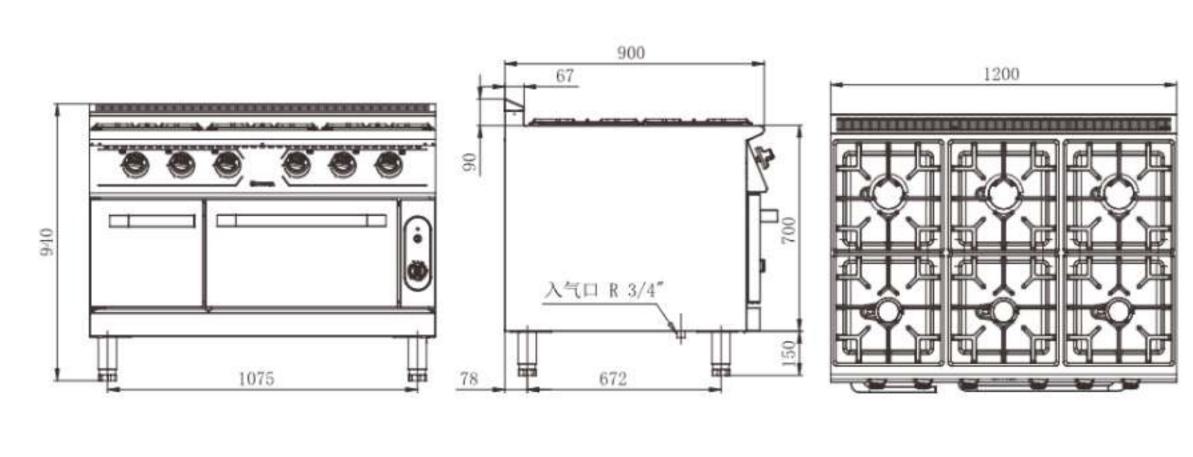

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT36+KXT5.8-V9S-RQ-6 (天然气)	7.5x3+4.5x3+5.8	470 / 270	1200x900x (850+90) 焗炉尺寸/Oven Dimension:	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY28+KXY5.8-V9S-RQ-6 (液化气)	5.6x3+4x3+5.8	179 / 278	560x700x270	2.88	4.42
配件: 烤箱网架1个	Accessories:Oven wire rac	k: 1			


特点

- · 炉头功率多种且易于更换,有9KW、7.5KW、4.5KW、 3.5KW供客户选择。
- 炉头采用精密铸造, 镀硬铬加工而成, 火力稳定经久耐用。
- 炉头为花型火焰设计,效率高节能,火焰大小可调节。
- 炉面模具拉伸成型,易于清洁。
- 炉头位于水盆凸起部位,可防止溢出。
- 重型炉架,超长炉柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。
- 烤箱带温度控制及熄火保护功能,温度均匀,最高限温330度。

- Burners with different power outputs (9KW, 7.5KW, 4.5KW and 3.5KW) are available and easy to replace.
- · The burners are manufactured through precision casting and hard plating to make sure that flames are stable and endurable; flames of the burner are designed to be flower-shaped and are adjustable, emphasizing high efficiency and energy conservation.
- Stretch forming cooking surface, easy to clean.
- · The burners are located in the projected part of the basin and prevent water from overflowing.
- · Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.
- · The oven offers temperature control and flame failure protection functions to achieve even temperature distribution. The highest temperature can reach 330°C.

四头电煮食炉连电焗炉 Electric 4-Plate Cooker With Oven



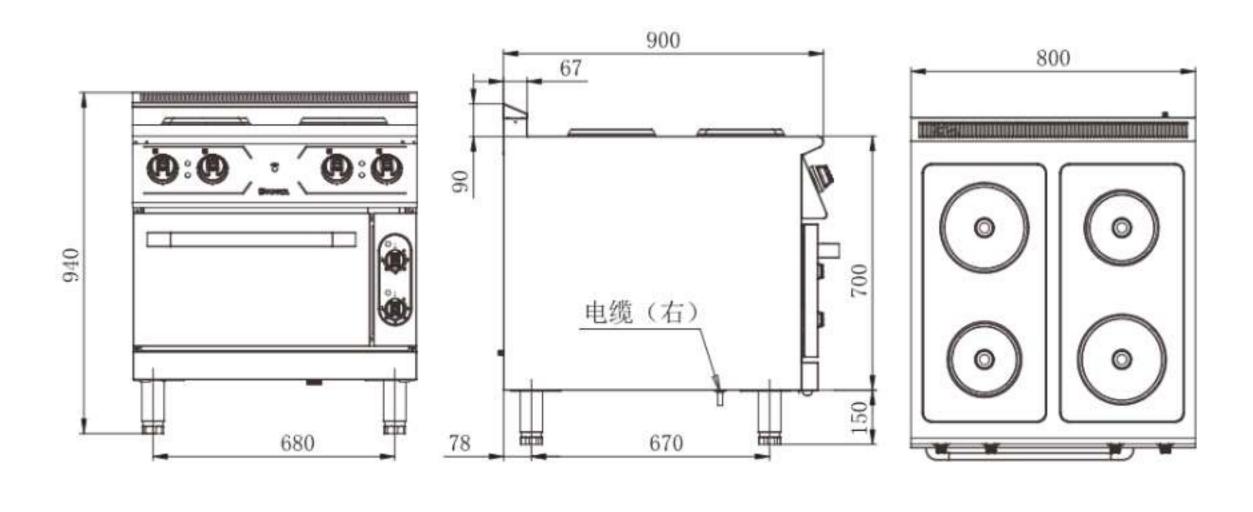

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TT-4	2.6x2+2x2+ (上1.8+下3)	380	105 / 175	800×900× (850+90) 焗炉尺寸/Oven Dimension: 560×700×270

特点


- · 壳体全部采用304不锈钢材质, 台面厚达1.5mm, 保证台面 足够强度。
- ・核心部件(如电热板、温控器等)德国进口,最大限度保障 性能稳定可靠。
- · 煮食炉三档调节,每个炉头单独按钮控制。
- · 超温保护功能,确保使用安全。
- · 6寸不锈钢可调脚, 可调范围正负25mm可调。
- · 焗炉分上下加热区,可独立温控控制,节约能源。

Features

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to ensure strength.
- Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- The cooker has 3-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- · It is equipped with safety thermostats to ensure safety.
- · The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.
- The oven is divided into upper and lower heating areas, which can be controlled by independent temperature control to save energy.

四头电煮食炉连柜座Electric 4 Hot–Plate Cooker With Oven



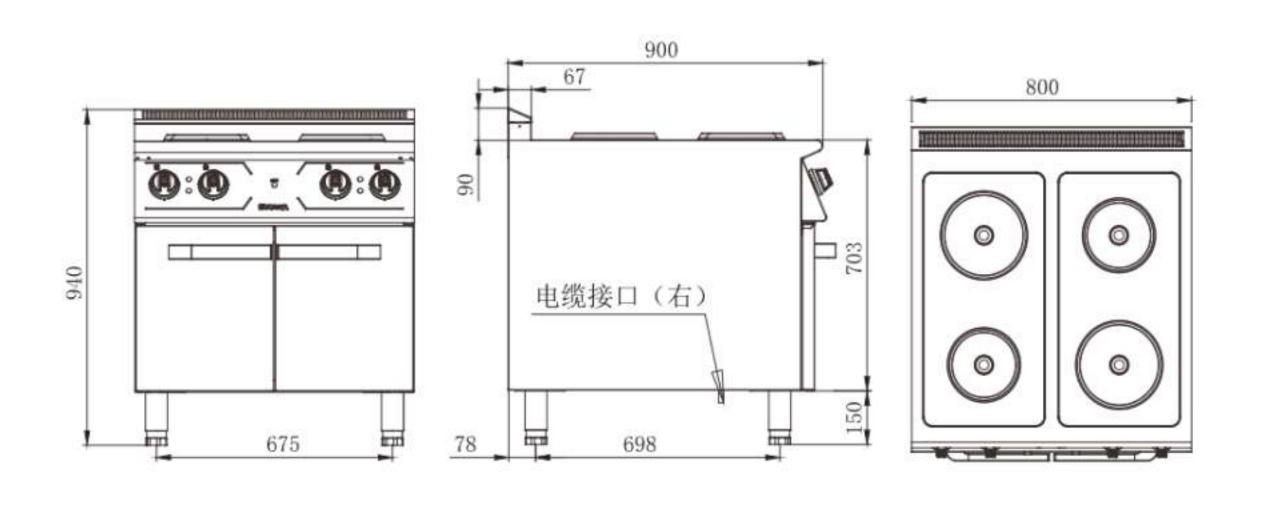

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TE-4	2.6x2+2x2	380	65 / 112	800×900×(850+90)


特点

- · 壳体全部采用304不锈钢材质, 台面厚达1.5mm, 保证台面 足够强度。
- ・核心部件(如电热板、温控器等)德国进口,最大限度保障 性能稳定可靠。
- · 煮食炉三档调节,每个炉头单独按钮控制。
- · 超温保护功能,确保使用安全。
- · 6寸不锈钢可调脚, 可调范围正负10mm可调。

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to ensure strength.
- Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- The cooker has 3-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- · It is equipped with safety thermostats to ensure safety.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 10cm.

四头电煮食炉连电焗炉 Electric 4-Plate Cooker With Oven



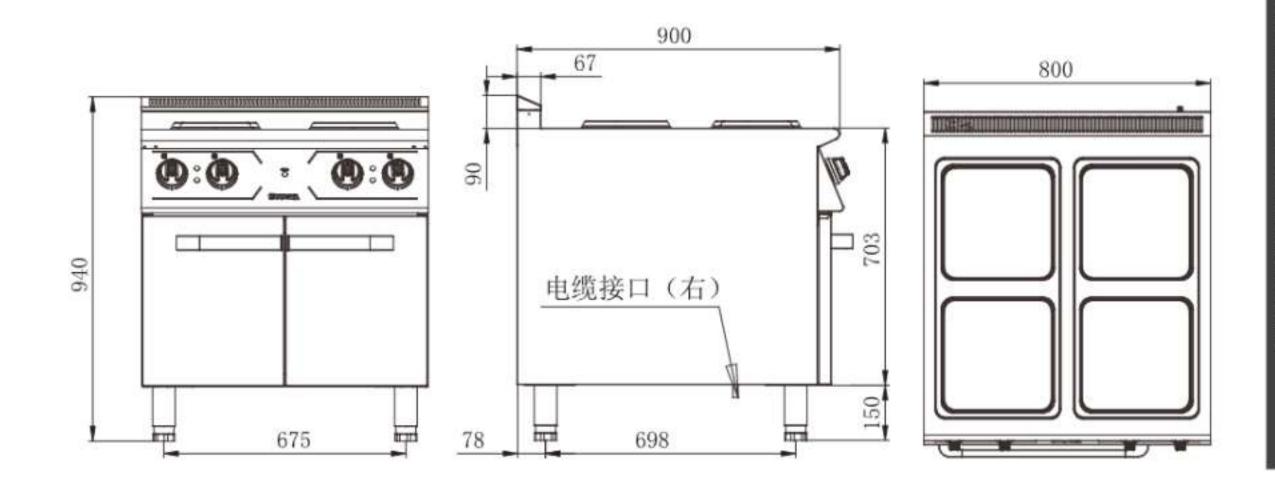

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TE-4A	4×4	380	67 / 137	800×900×(850+90)

特点


- 壳体全部采用304不锈钢材质,台面厚达1.5mm,保证台面
- · 核心部件(如电热板、温控器等)德国进口,最大限度保障 性能稳定可靠。
- · 煮食炉三档调节,每个炉头单独按钮控制。
- 超温保护功能,确保使用安全。
- · 6寸不锈钢可调脚,可调范围正负25mm可调。

Features

- · The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to
- · Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- · The cooker has 3-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- · It is equipped with safety thermostats to ensure safety.
- · The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.

四头电煮食炉连焗炉 Electric 4 Hot-Plate Cooker With Oven



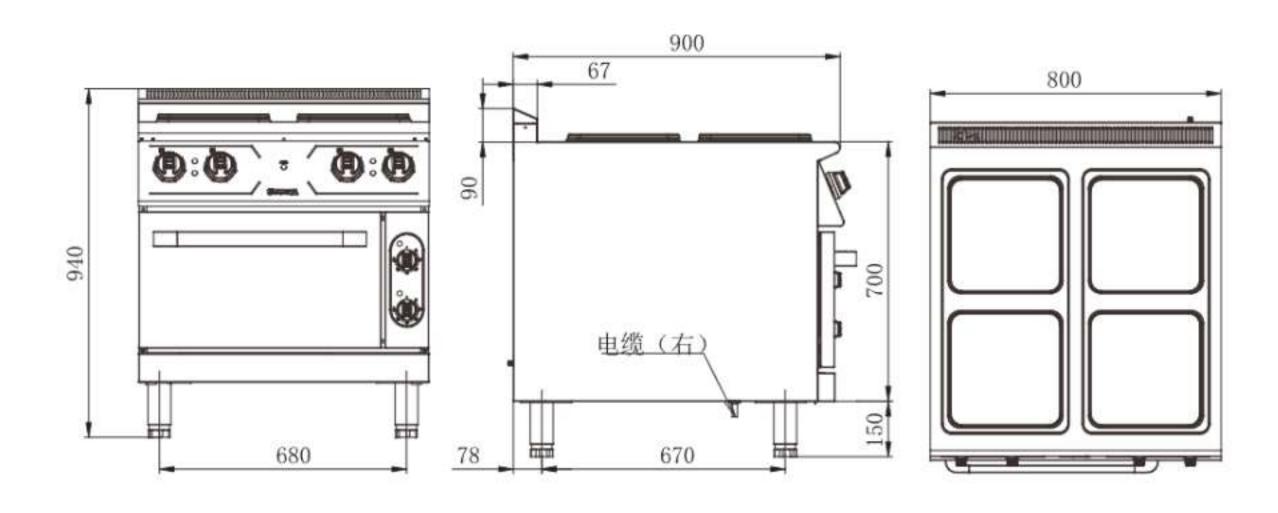

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TT-4A	4×4+ (上1.8+下3)	380	130 / 200	800×900× (850+90) 焗炉温度: 50-275℃ 焗炉内膛尺寸/Internal Chamber Dimension of the Oven: 560×700×270


特点

- · 壳体全部采用304不锈钢材质, 台面厚达1.5mm, 保证台面 足够强度。
- · 核心部件(如电热板、温控器等)德国进口,最大限度保障 性能稳定可靠。
- 煮食炉三档调节,每个炉头单独按钮控制。
- 超温保护功能,确保使用安全。
- 6寸不锈钢可调脚,可调范围正负25mm可调。
- · 焗炉分上下加热区,可独立温控控制,节约能源。

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to ensure strength.
- · Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- · The cooker has 3-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- It is equipped with safety thermostats to ensure safety.
- · The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.
- · The oven is divided into upper and lower heating areas, which can be controlled by independent temperature control to save energy.

六头电煮食炉连焗炉Electric 6 Hot-Plate Cooker With Oven



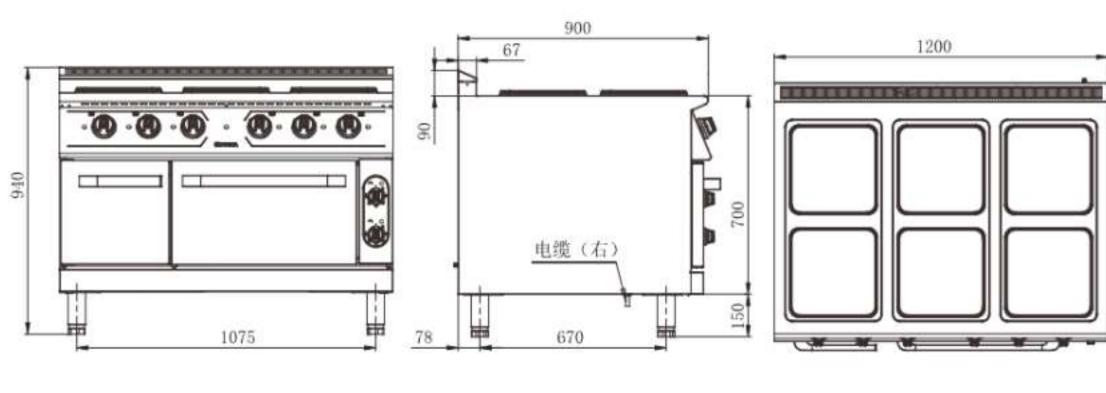

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TT-6A 4	4×4×6+ (上1.8+下3)	380	180 / 270	1200×900×(850+90) 焗炉尺寸/Oven Dimension:560×700×270

特点


- · 壳体全部采用304不锈钢材质, 台面厚达1.5mm, 保证台面足够强度。
- ·核心部件(如电热板、温控器等)德国进口,最大限度保障性能稳定可靠。
- · 煮食炉六档调节,每个炉头单独按钮控制。
- · 焗炉温控范围60~275℃可调。
- ·超温保护功能,最高限温340℃,确保使用安全。
- ·6寸不锈钢可调脚,可调范围正负25mm可调。

Features

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness ensuring strength.
- Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- The cooker has 6-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- · Adjustable temperature of the oven with a range of 60-275°C.
- Equipped with safety thermostats, the cooker's maximum temperature is 340°C to ensure safety.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.

六头电煮食炉连柜座 Electric 6 Hot-Plate Cooker With Cabinet



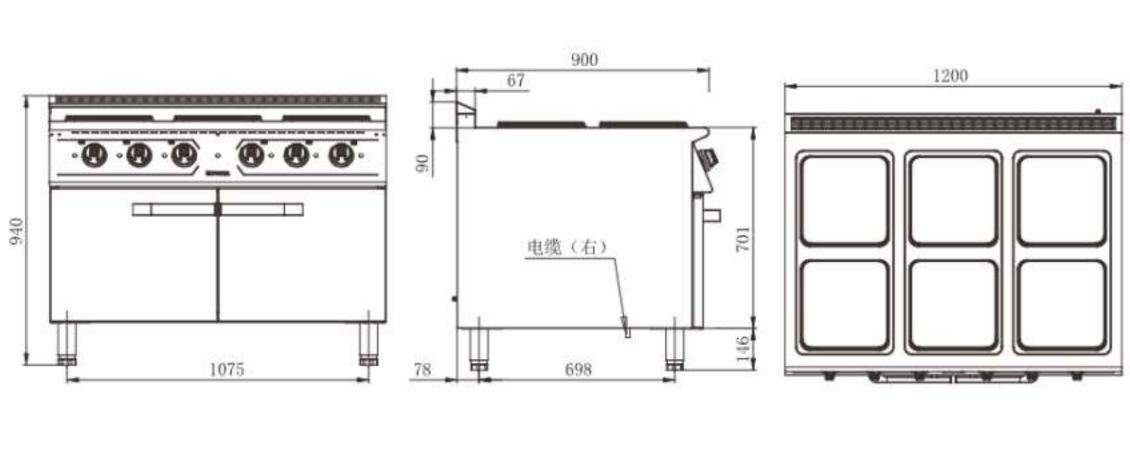

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重 (KG)	规格Dimensions(mm)
V9-TE-6A	4×6	380	165 / 255	1200×900×(850+90) 焗炉尺寸/Oven Dimension: 560×700×270

特点


- · 壳体全部采用304不锈钢材质,台面厚达1.5mm,保证台面 足够强度。
- · 核心部件(如电热板、温控器等)德国进口,最大限度保障性能稳定可靠。
- · 煮食炉三档调节,每个炉头单独按钮制。
- · 超温保护功能,确保使用安全。
- · 6寸不锈钢可调脚, 可调范围正负25mm可调。

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to ensure strength.
- Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- The cooker has 3-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- It is equipped with safety thermostats to ensure safety.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.



双缸双筛燃气炸炉连柜座 Gas 2-Tank Fryer(2-Basket) With Cabinet



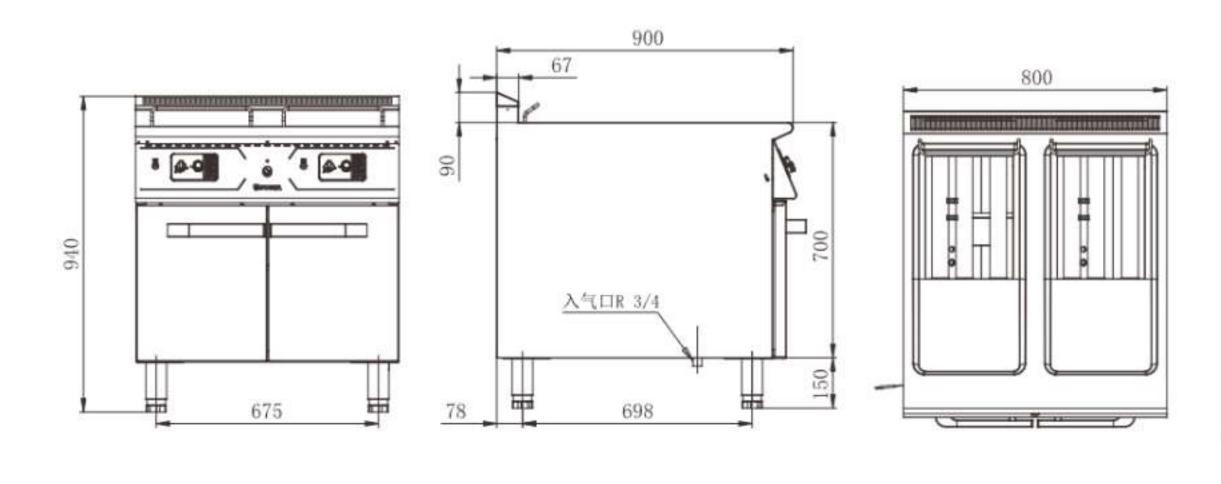

型号Model	功率Power(kw)	规格Dimensions(mm)	油缸容量/尺寸Capacity(L)	净重/毛重(KG)	耗气量Gas	Consumption
SZLT31-V9-RC-2 (天然气)	15.5x2	800 × 900 × (850+90)	20L×2 /	125 / 195	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZLY31-V9-RC-2 (液化气)	15.5x2	800×900×(850+90) 炸篮尺寸: 310×230×150n	260×360×200mm	125 / 195	1.29x2	1.64x2

特点

- ·全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- ·升温速度快,油盆容积大。
- ·火管式加热传热效率高,可防止粘底及炉体温度过高。
- ·自动控温,使用集束热电偶,无电源。
- ·超温保护,确保安全230°C。
- · 放油阀设置自锁装置, 防止误操作。


Features


- · All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- The heating speed is fast and the volume of the oil basin is large
- Fire tube heating has high heat transfer efficiency and can prevent sticking to the bottom and excessive furnace temperature.
- · Automatic temperature control, using cluster thermocouple, no power supply.
- · Overtemperature protection to ensure safety 230 ° C.
- The oil drain valve is equipped with self-locking device to prevent misoperation.




单缸单筛燃气炸炉连柜座 Gas 1-Tank Fryer(1-Basket) With Cabinet



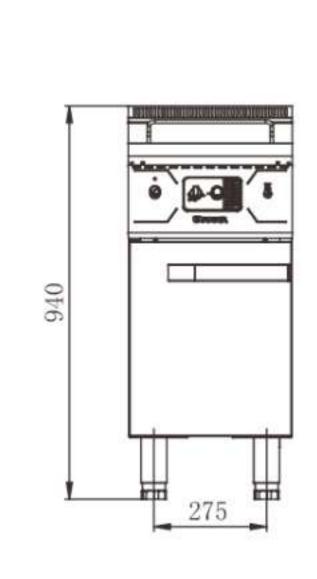

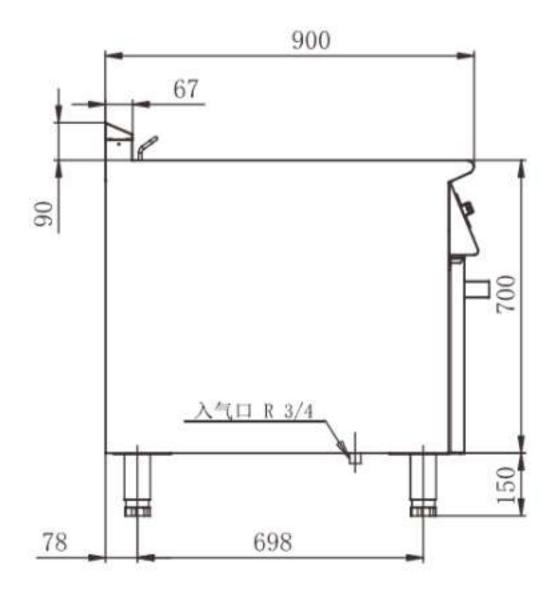

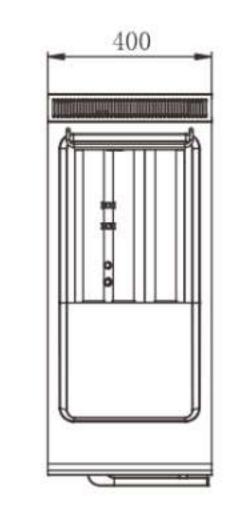

型号Model	功率Power(kw)	规格Dimensions(mm)	油缸容量/尺寸Capacity(L)	净重/毛重(KG)	耗气量Gas	Consumption
SZLT15-V9-RC-1 (天然气)	15.5	400 × 900 × (850+90)	20L /	60 / 112	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZLY15-V9-RC-1 (液化气)	15.5	炸篮尺寸: 310×230×150m	260×360×200mm	60 / 112	1.29	1.64

特点

- · 全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- ·升温速度快,油盆容积大。
- · 火管式加热传热效率高,可防止粘底及炉体温度过高。
- ·自动控温,使用集束热电偶,无电源。
- ·超温保护,确保安全230°C。
- · 放油阀设置自锁装置, 防止误操作。


(Features)

- All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- The heating speed is fast and the volume of the oil basin is large
- Fire tube heating has high heat transfer efficiency and can prevent sticking to the bottom and excessive furnace temperature.
- Automatic temperature control, using cluster thermocouple, no power supply.
- Overtemperature protection to ensure safety 230 ° C.
- The oil drain valve is equipped with self-locking device to prevent misoperation.



双缸双筛电炸炉连柜座Electric 2-Tank Fryer (2-Basket) With Cabinet



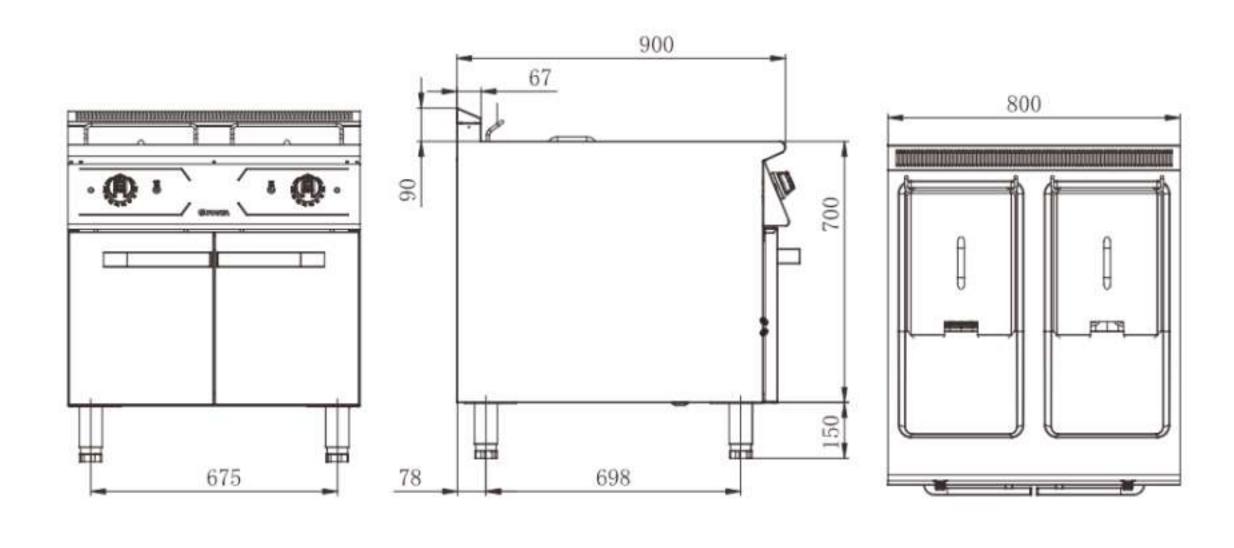

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	油缸容量/尺寸Capacity(L)	炸篮尺寸(mm)
V9-TC-2	24	380	125 / 195	800×900×(850+90)	24Lx2 / 260×360×200mm	310×230×150

特点


- ·全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- · "V"形冷凉区沉积渣物,防粘于发热管上烧焦。
- ・温度自动控制调节范围50℃~190℃,230℃超温保护。
- · 发热管加热, 传热效率高。


Features

- · All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- "V" shaped cold area deposits slag to prevent it from sticking to the heating pipe and burning.
- Automatic temperature control, adjustment range 50 °C ~ 190 °C, 230 °C overtemperature protection.
- · Heating tube heating, high heat transfer efficiency.

单缸单筛电炸炉连柜座Electric 1–Tank Fryer (1–Basket) With Cabinet



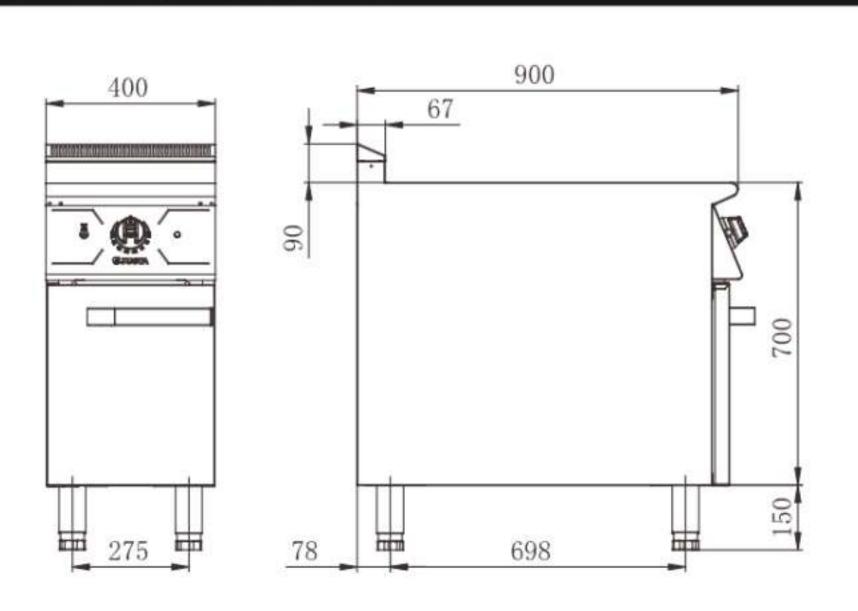

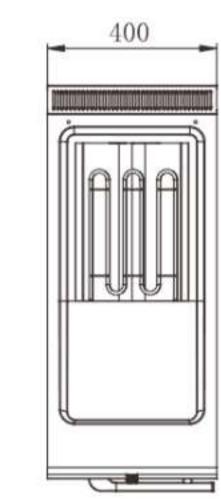

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	油缸容量/尺寸Capacity(L)	炸篮尺寸(mm)
V9-TC-1	12	380	53 / 116	400×900×(850+90)	24L / 260×360×200mm	310×230×150


特点

- · 全不锈钢机身结构。
- ·可调不锈钢脚,放置平稳。
- · "V"形冷凉区沉积渣物,防粘于发热管上烧焦。
- ・温度自动控制调节范围50℃~190℃,230℃超温保护。
- · 发热管加热, 传热效率高。

- · All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- "V" shaped cold area deposits slag to prevent it from sticking to the heating pipe and burning.
- Automatic temperature control, adjustment range 50 °C ~ 190 °C, 230 °C overtemperature protection.
- Heating tube heating, high heat transfer efficiency.

电煮面炉连柜座Electric Noodle Boiler With Cabinet



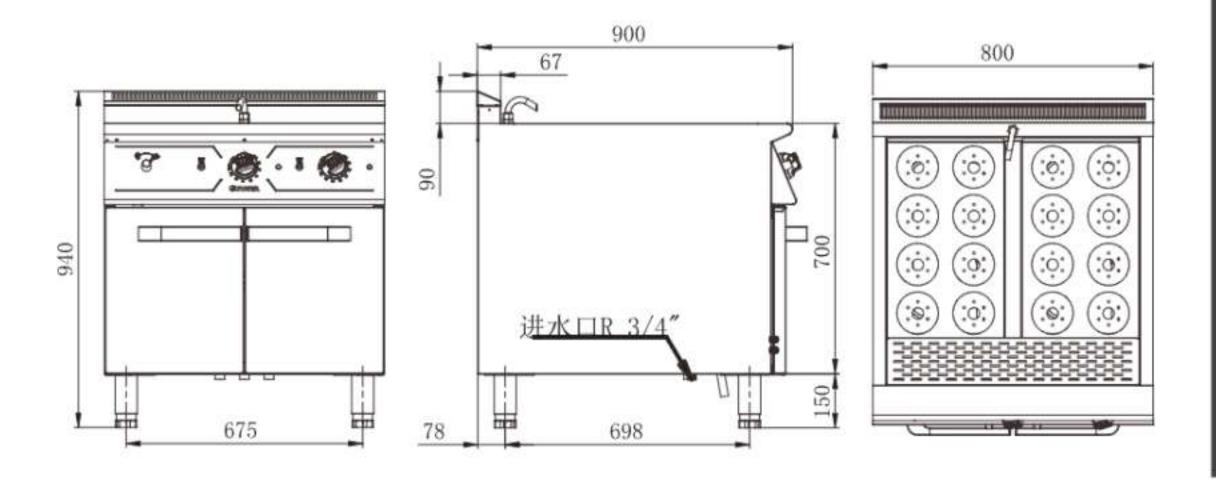

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TM-16	18	380	86 / 156	800×900× (850+90) 面篓尺寸: φ120×140mm

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ·进水、排水方便快捷。
- ・可调节炉脚。
- · 独特喷流式设计, 操作简单。

Features

- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.

电煮面炉连柜座Electric Noodle Boiler With Cabinet



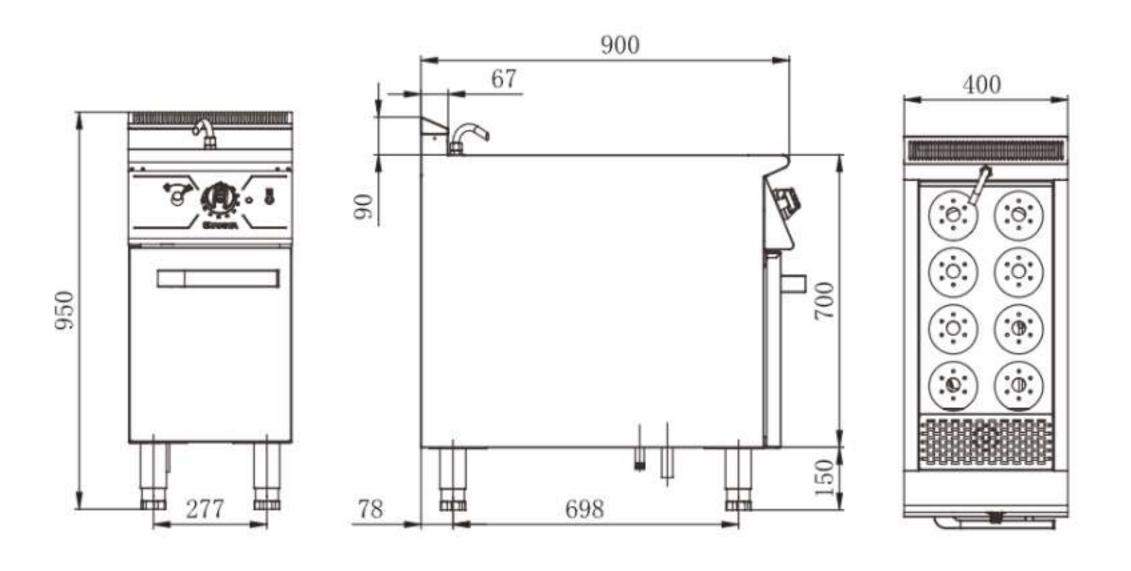

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TM-8	9	380	45 / 78	400×900× (850+90) 面篓尺寸:φ120×140mm

- ·功率大,升温快,效率高。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- · 独特喷流式设计, 操作简单。


(Features)

- High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.



燃气煮面炉连柜座 Gas Noodle Boiler With Cabinet



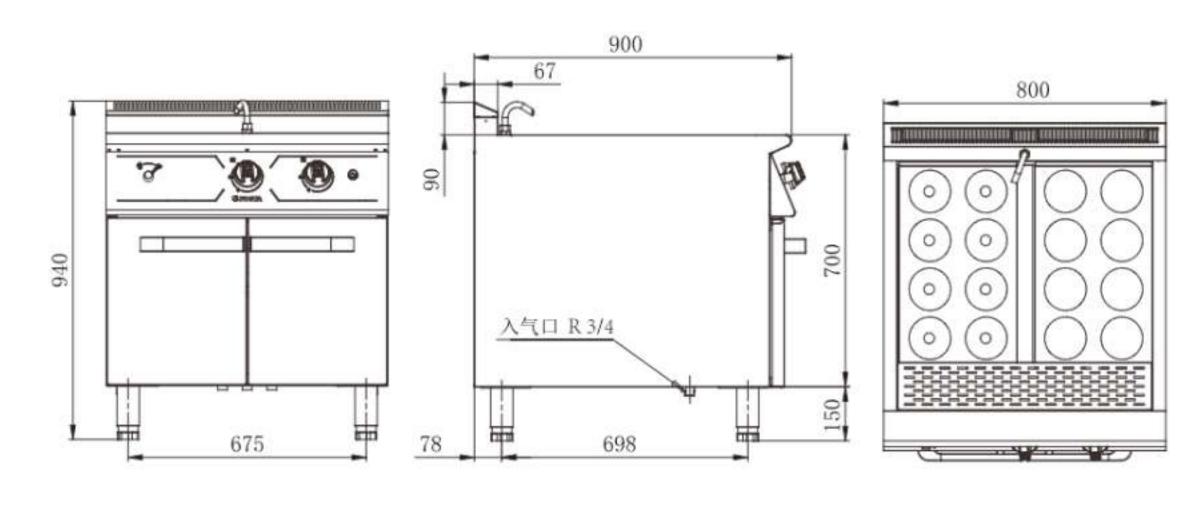

型号Model	热功率Power(kw)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Cons	umption
SZST22-V9-RM-16 (天然气)	22	100 / 170	800×900×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZSY22-V9-RM-16 (液化气)			面篓尺寸: φ120×140mm	1.82	2.32

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- · 独特喷流式设计,操作简单。

Features

- High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.

电意粉炉连柜座 Electric Pasta Cooker With Cabinet



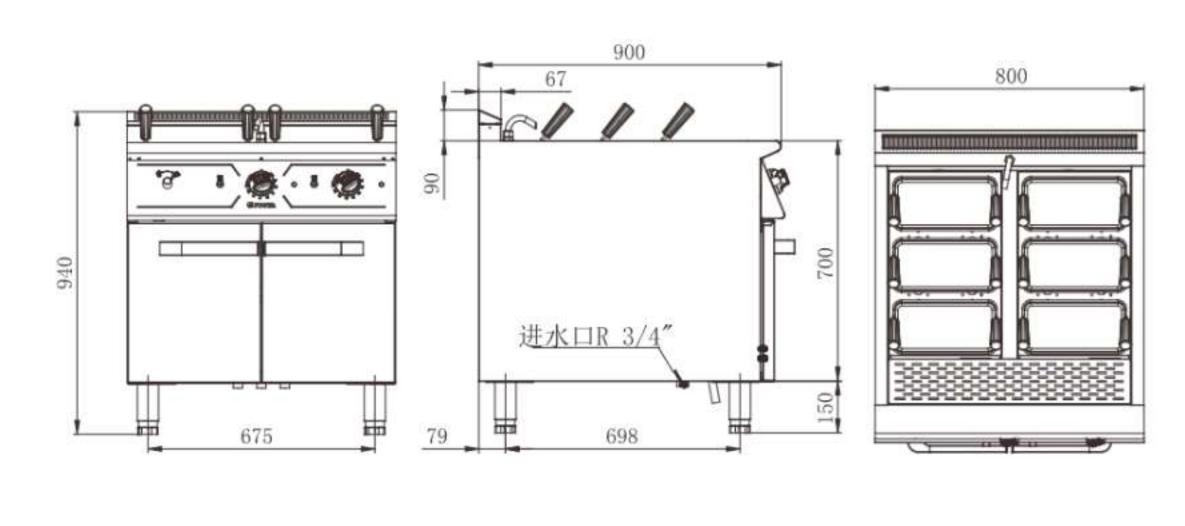

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	粉筐尺寸(mm)
V9-TM-S6	18	380	86 / 165	800×900×(850+90)	280×150×180mm

特点


· 台面一体拉伸成型,易于清洁。缸内油温均匀,缸底有足够的冷油区,即使食物溢出炸篮,也不会被烧焦,从而提高了油的重复利用率及油炸效果。

Features

The oil temperature in the tank is even. The large oil cold zone at the bottom of the tank
can assure that food outside the basket will not be burned, improving the utilization rate of
the oil and deep fry performance.

电意粉炉连柜座 Electric Pasta Cooker With Cabinet



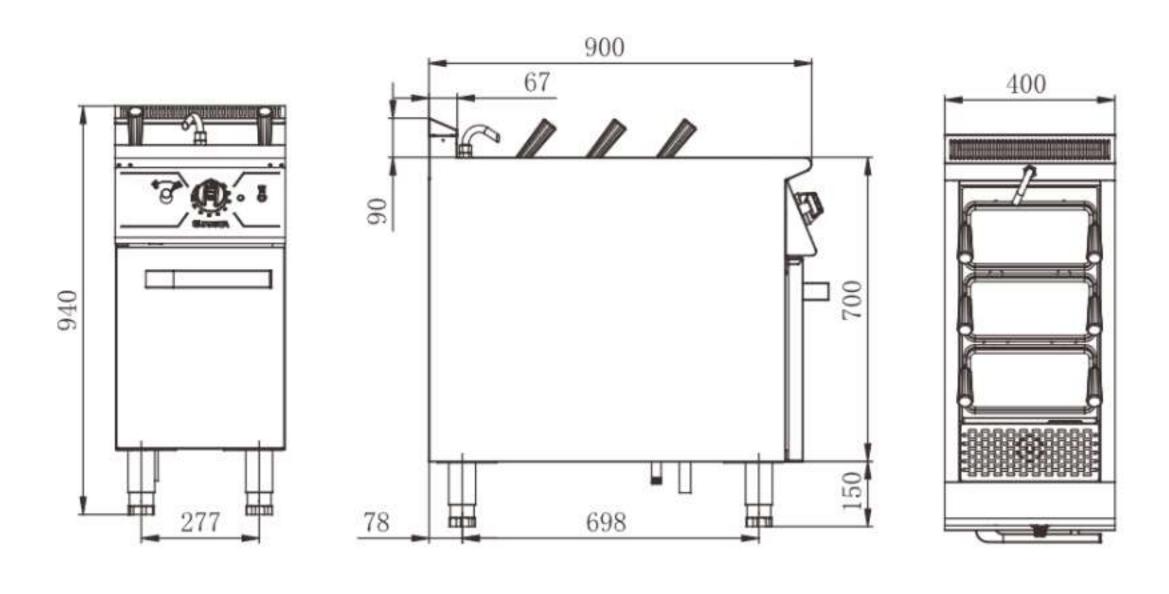

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	粉筐尺寸(mm)
V9-TM-S3	9	380	45 / 68	400×900×(850+90)	280×150×180mm

特点


·台面一体拉伸成型,易于清洁。缸内油温均匀,缸底有足够的 冷油区,即使食物溢出炸篮,也不会被烧焦,从而提高了油的 重复利用率及油炸效果。

Features

• The oil temperature in the tank is even. The large oil cold zone at the bottom of the tank can assure that food outside the basket will not be burned, improving the utilization rate of the oil and deep fry performance.

燃气意粉炉连柜座Gas Pasta Cooker With Cabinet



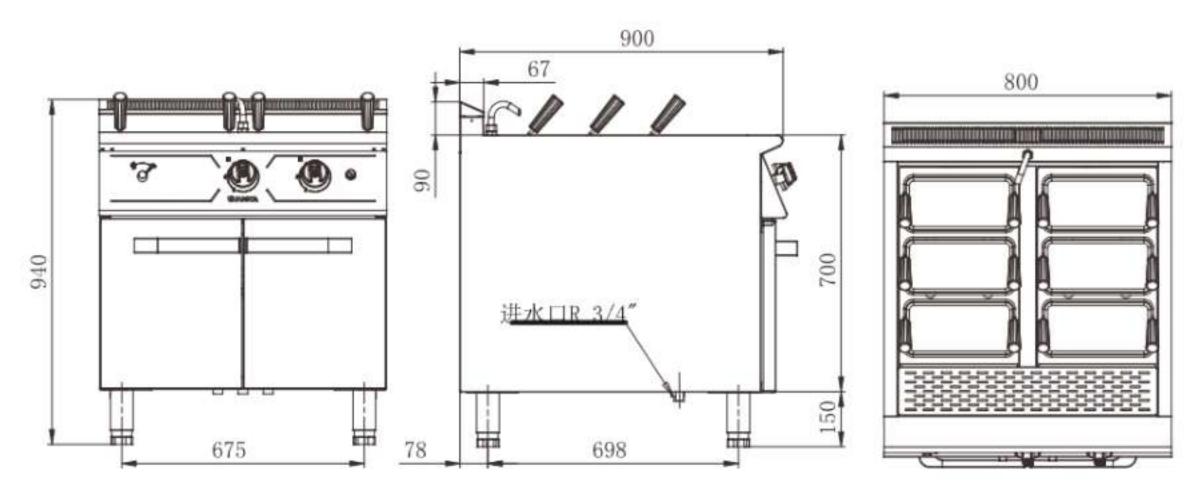

型号Model	热功率Power(kw)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Consu	umption
SZST22-V9-RM-S6 (天然气)		100 / 170	800×900×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZSY22-V9-RM-S6 (液化气)	22	100 / 170	粉筐尺寸: 280×150×180mm	1.82	2.32

- · 功率大,升温快,效率高。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- · 独特喷流式设计, 操作简单。


(Features)

- High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- It is equipped with adjustable feet.
- Unique electric jet flow design makes it easy to operate.



法式燃气热铁板炉连焗炉 Gas Solid Top With Gas Oven



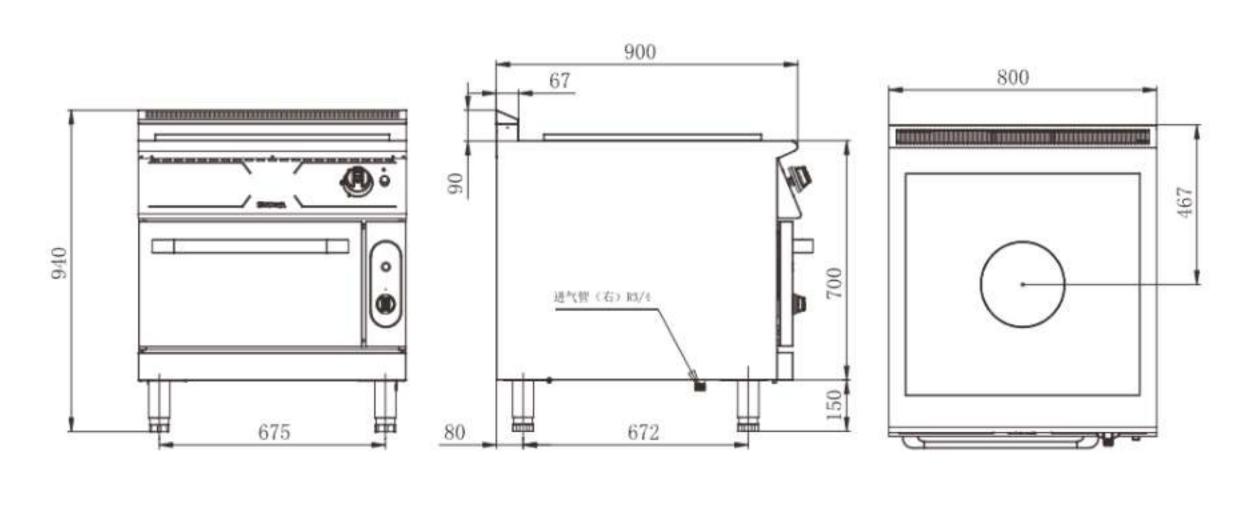

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Ga	s Consumption
SRBT10+KXT5.8-V9-RT (天然气)	-RT 10+5.8 165 / 235		800×900×(850+90) 焗炉尺寸/Oven Chamber Dimension:	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10+KXY5.8-V9-RT (液化气)	Y5.8-V9-RT	103 / 233	560×700×270	1.31	1.67

配件: 烤箱网架1个

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- ·压铸铁板,带导热槽传热快。
- ·可调节炉脚。

Features

- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- It adopts die casting iron top with heat conducting grooves, which can conduct heat fast and keep food warm.
- It is equipped with adjustable feet.

法式燃气热铁板炉连柜座 Gas Solid Top With Cabinet



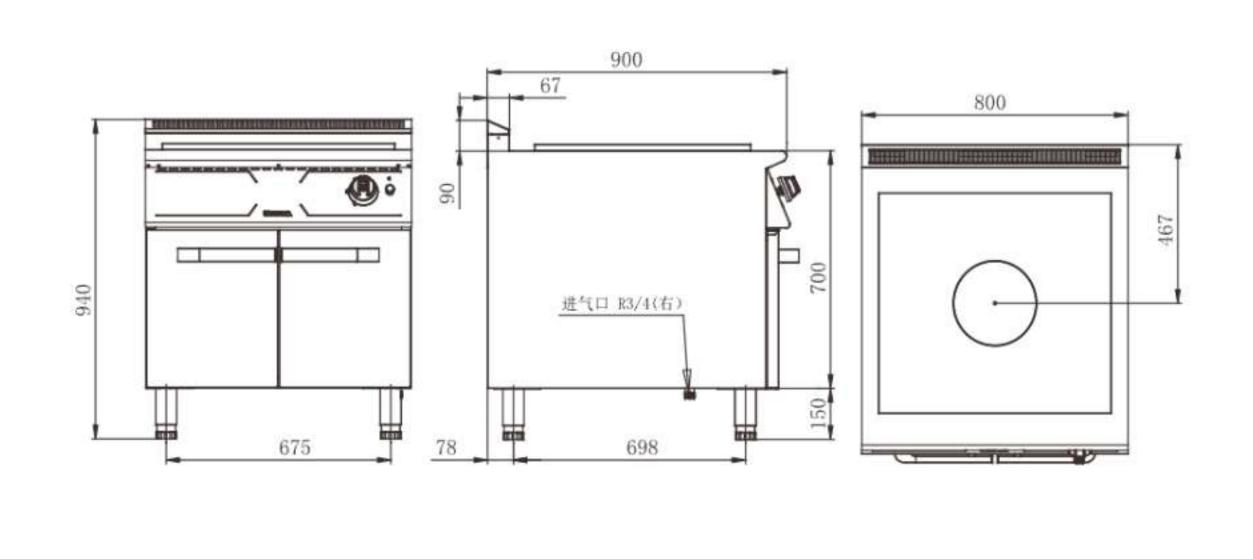

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Ga	s Consumption
SRBT10-V9-RE (天然气)	10	112 / 182	800 × 900 × (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10-V9-RE (液化气)			•	0.83	1.06


特点

- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- ·压铸铁板,带导热槽传热快。
- ·可调节炉脚。

- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- It adopts die casting iron top with heat conducting grooves, which can conduct heat fast and keep food warm.
- It is equipped with adjustable feet.

燃气保温炉连柜座 Gas Bain Marie With Cabinet



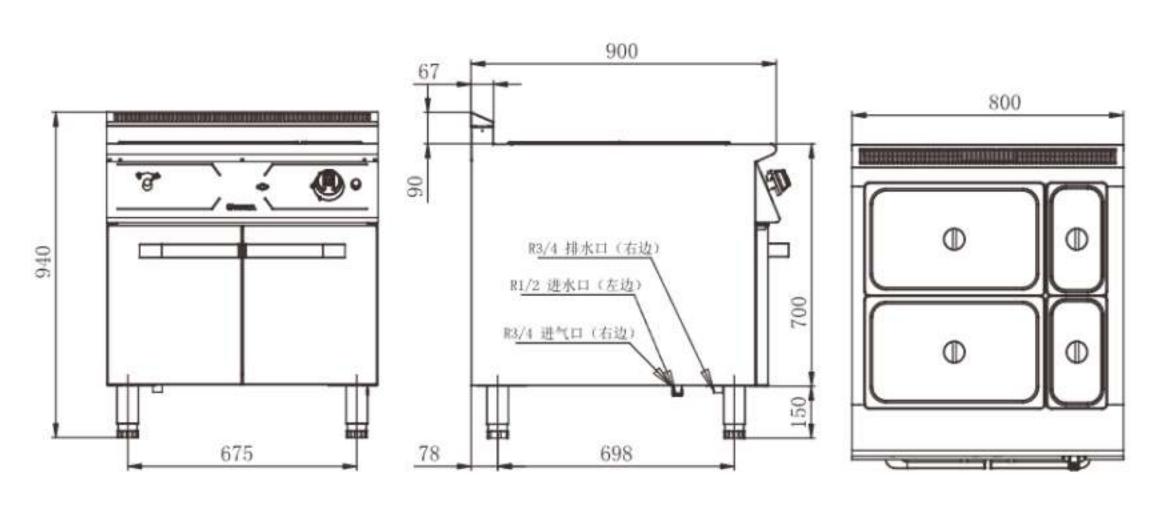

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Ga	s Consumption
SRBT5.2-V9-RB (天然气)	5.2	90 / 160	800 × 900 × (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY5.2-V9-RB (液化气)	J.2	00 / 100	份盘尺寸: 640x510x160/330x180x160	0.43	0.55

特点


- ·功率大,升温快,效率高,防干烧。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ·双向进水、排水人性设计,操作简单、便捷。
- ·不锈钢可调节炉脚,随意调节设备角度。

Features

- · High power output, quick heating, high efficiency and anti-dry heating.
- · All Stainless steel body,nice-looking and easy to clean.
- · The user-friendly design of two-way water inlet and outlet makes it convenient and easy to operate.
- · With adjustable stainless steel feet, users can adjust the angle of the equipment as they want.

电保温炉连柜座 Electric Bain Marie With Cabinet



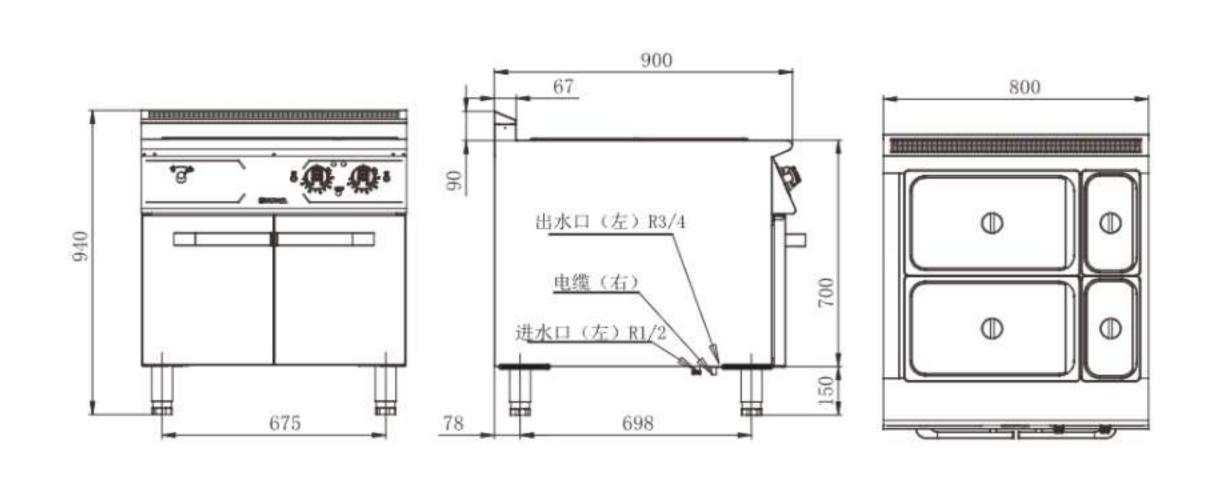

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	温控范围TEMP.(°C)	规格Dimensions(mm)
V9-TB	6	380	90/160	30-85	800×900× (850+90) 份盘尺寸: 640x510x160/330x180x160

特点

- · 功率大,升温快,效率高,防干烧。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ·双向进水、排水人性设计,操作简单、便捷。

配件: 1/1"份数盒2个, 1/3"份数盒2个


·不锈钢可调节炉脚,随意调节设备角度。

- High power output, quick heating, high efficiency and anti-dry heating.
- All Stainless steel body,nice-looking and easy to clean.
- · The user-friendly design of two-way water inlet and outlet makes it convenient and easy to operate.
- · With adjustable stainless steel feet, users can adjust the angle of the equipment as they want.



燃气1/3坑扒炉连柜座 Gas Griddle (2/3Flat&1/3Grooved) With Cabinet



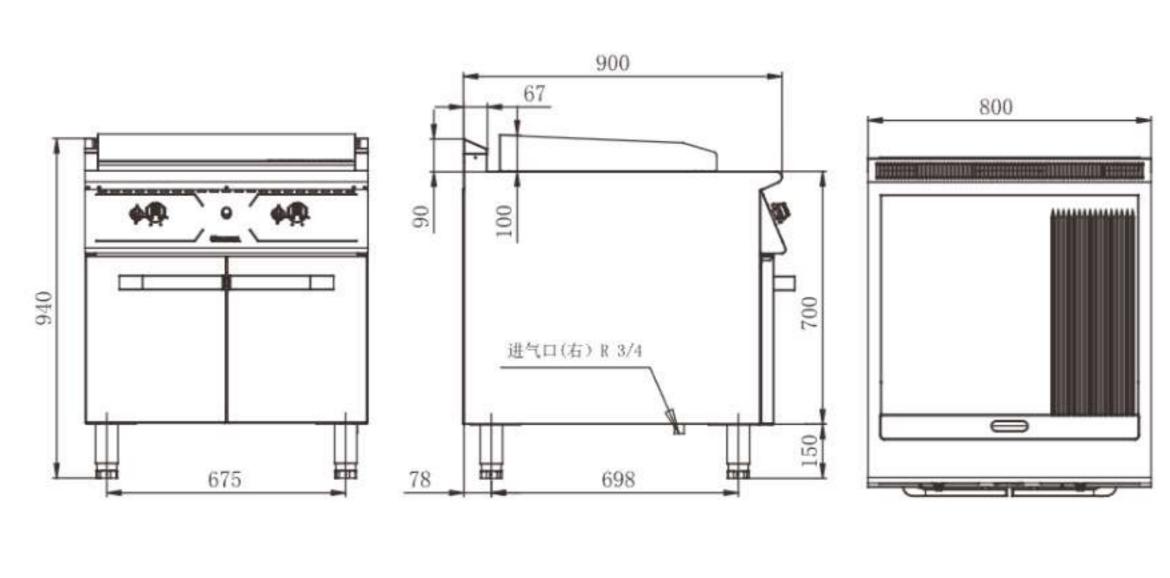

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SRBT11-V9-RG (天然气)	11.8	125 / 199	800×900×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10-V9-RG (液化气)	10.6		扒板尺寸/Griddle size: 720×600×20	0.88	1.25

特点


- · 功率大, 升温快, 效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- · 镀铬扒板,减少热量分散。
- ·可调节炉脚。

Features

- · High power output, quick heating and high efficiency.
- All Stainless steel body,nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- · It is equipped with adjustable feet.

M

燃气1/3坑扒炉连焗炉Gas Griddle (2/3Flat&1/3Grooved) With Gas Oven

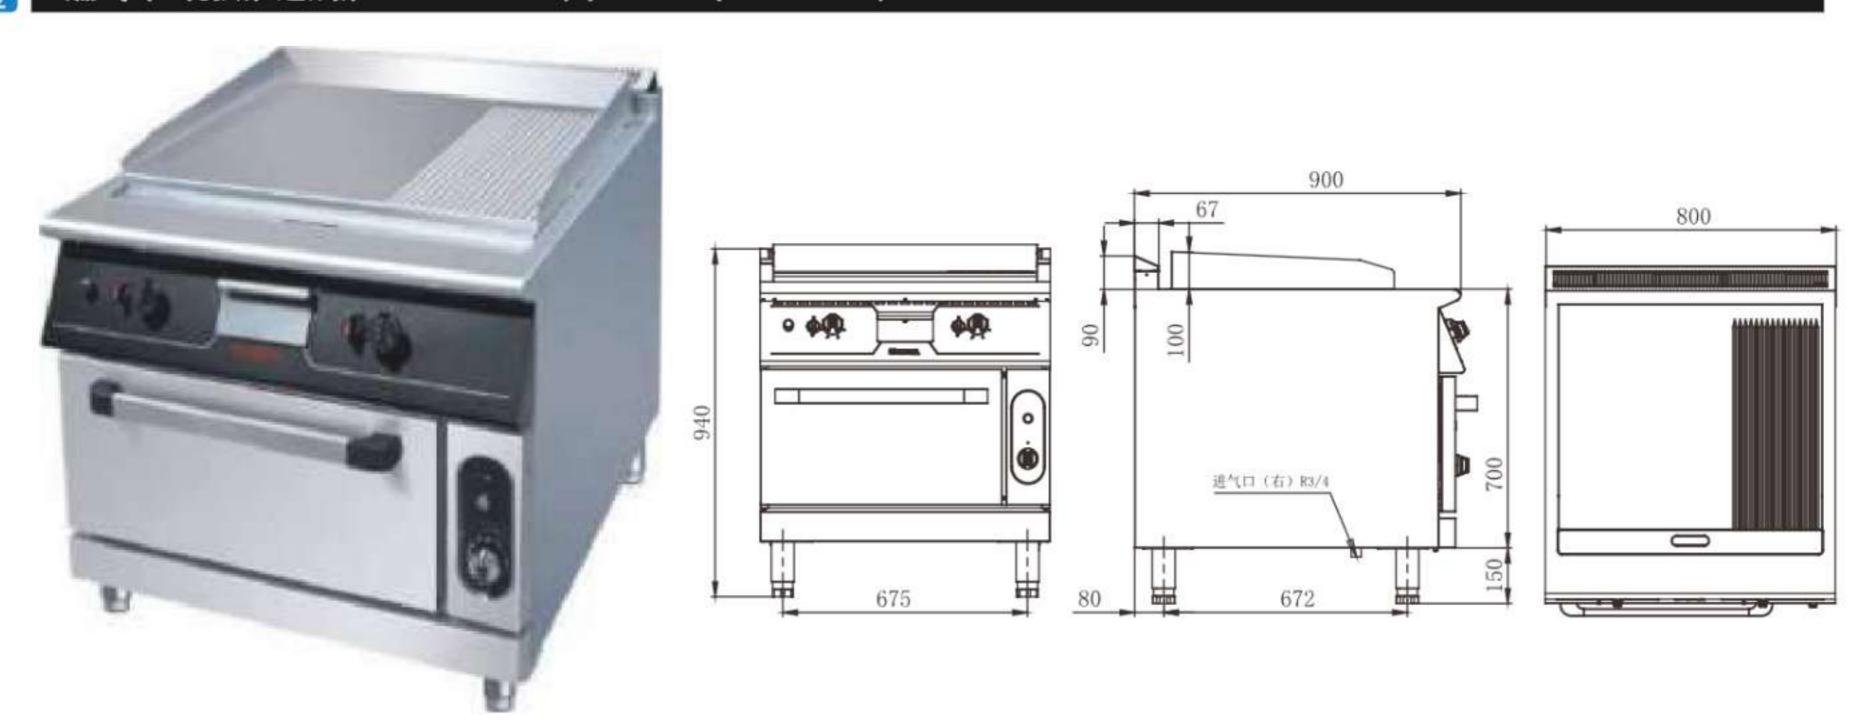

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SRBT11+KXT5.8-V9-RU (天然气)	11.8+5.8		800×900×(850+90) 扒板尺寸/Griddle size: 720×600×20	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10+KXY5.8-V9-RU (液化气)	10.6+5.8	178 / 221	焗炉尺寸/Oven Chamber Dimension: 560×700×270	1.36	1.87
配件: 烤箱网架1个					


特点


- · 功率大, 升温快, 效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- · 镀铬扒板,减少热量分散。
- ·可调节炉脚。


- · High power output, quick heating and high efficiency.
- All Stainless steel body,nice-looking and easy to clean.
- · Chromed plate can help reduce heat loss.
- · It is equipped with adjustable feet.

燃气全平扒炉连单门柜座 Gas Griddle With Cabinet



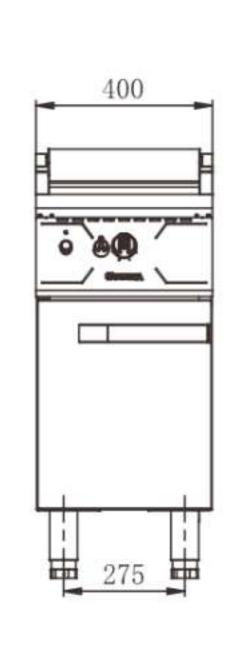

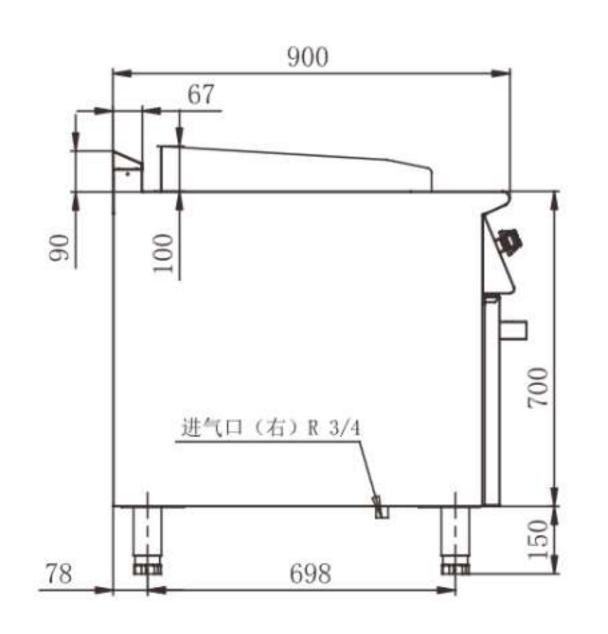

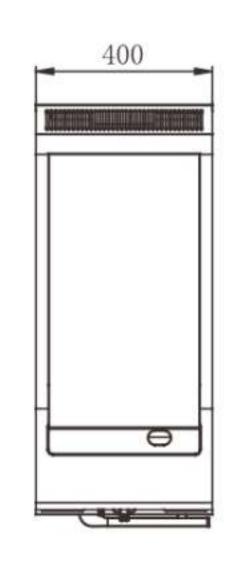

型号Model	热功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Cor	nsumption
SRBT5.9-V9-RGA (天然气)	F 0		70 / 125	400×900×(850+90) 扒板尺寸/Griddle size: 350×610×20	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY5.3-V9-RGA (液化气)	5.9	5.9 —			0.44	0.62

特点


- · 功率大,升温快,效率高。
- · 外形全不锈钢,简约美观,清洗方便。
- · 镀铬扒板,减少热量分散。
- ·可调节炉脚。


Features


- High power output, quick heating and high efficiency.
- · All Stainless steel body,nice-looking and easy to clean.
- · Chromed plate can help reduce heat loss.
- · It is equipped with adjustable feet.

电全平扒炉连单门柜座 Electric Griddle With Cabinet



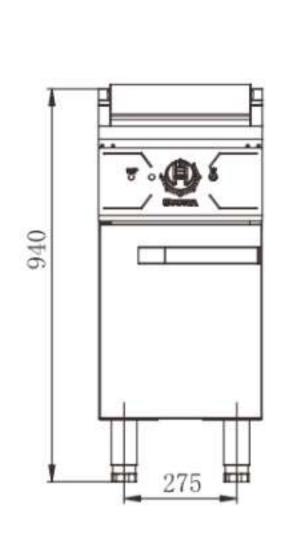

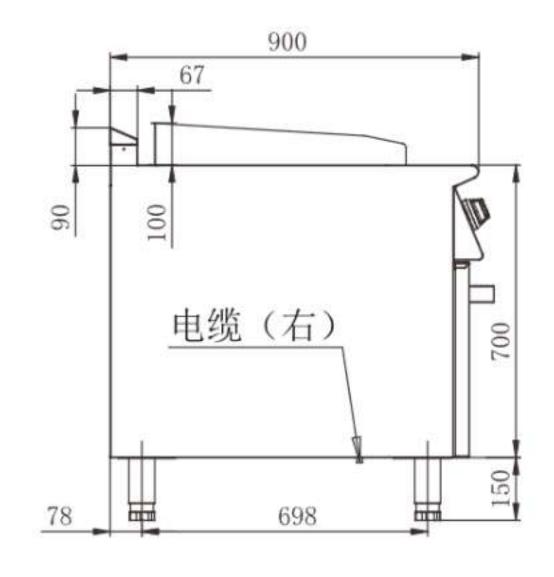

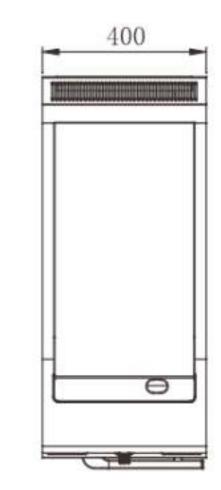

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TG400	5	380	68 / 125	400×900× (850+90)

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- ·镀铬扒板,减少热量分散。
- ·可调节炉脚。

- · High power output, quick heating and high efficiency.
- · All Stainless steel body,nice-looking and easy to clean.
- · Chromed plate can help reduce heat loss.
- · It is equipped with adjustable feet.



电1/3坑扒炉连柜座 Electric Griddle (2/3Flat&1/3Grooved) With Cabinet



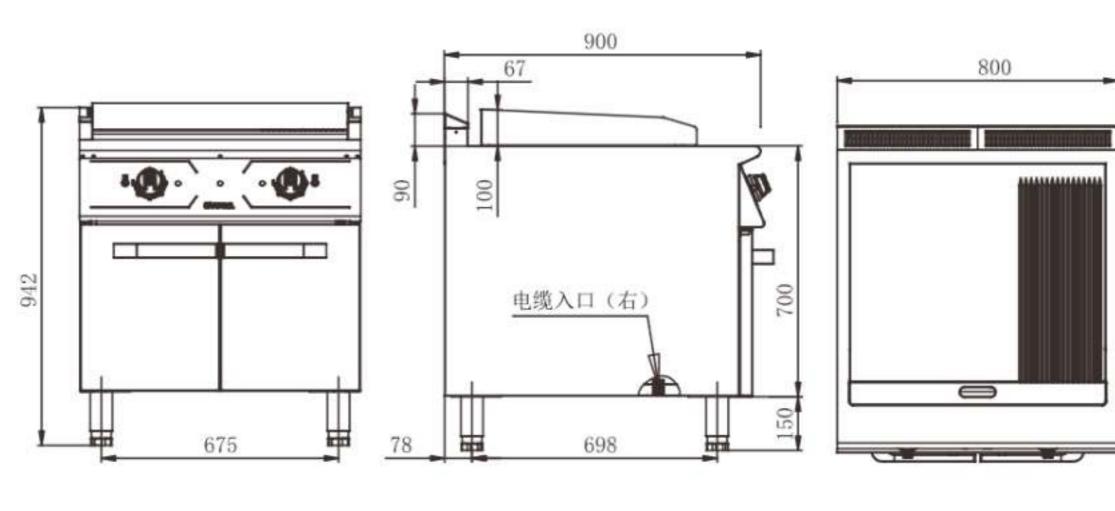

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TG	12	380	120 / 195	800×900(850+90) 扒板尺寸/Griddle size: 720×600×20

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- · 镀铬扒板,减少热量分散。
- ·可调节炉脚。

Features

- High power output, quick heating and high efficiency.
- · All Stainless steel body,nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- · It is equipped with adjustable feet.

电1/3坑扒炉连焗炉 Electric Griddle (2/3Flat&1/3Grooved) With Oven



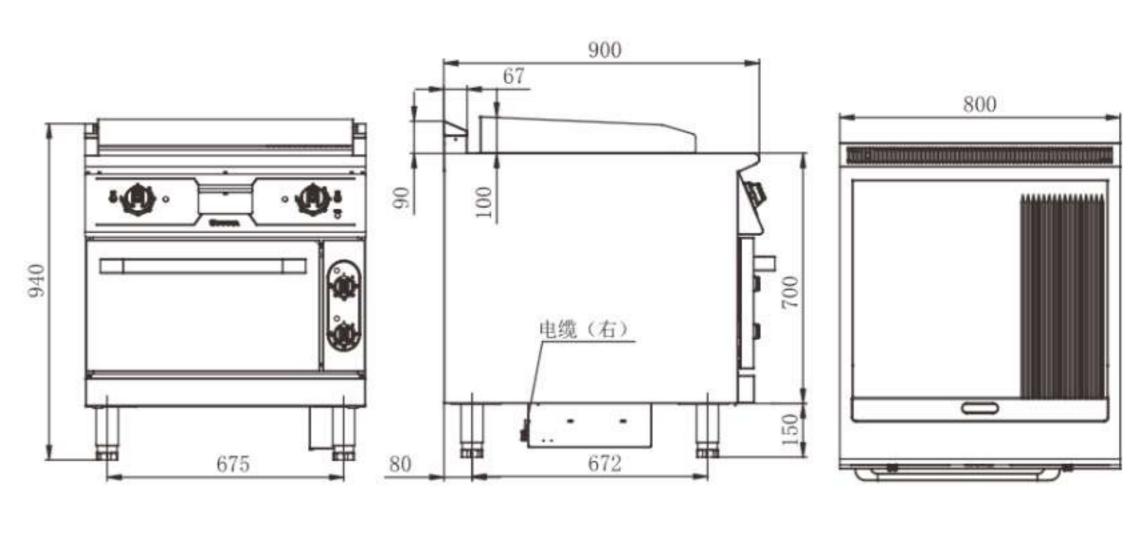

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9–TU	12+ (上1.8+下3)	380	177 / 220	800×900×(850+90) 扒板尺寸/Griddle size: 720×600×20 焗炉尺寸/Oven Chamber Dimension: 560×700×270


特点

- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- · 镀铬扒板,减少热量分散。
- ·可调节炉脚。

- · High power output, quick heating and high efficiency.
- All Stainless steel body,nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- It is equipped with adjustable feet.

可倾斜式电炒锅 Electric Tilting Braising Pan



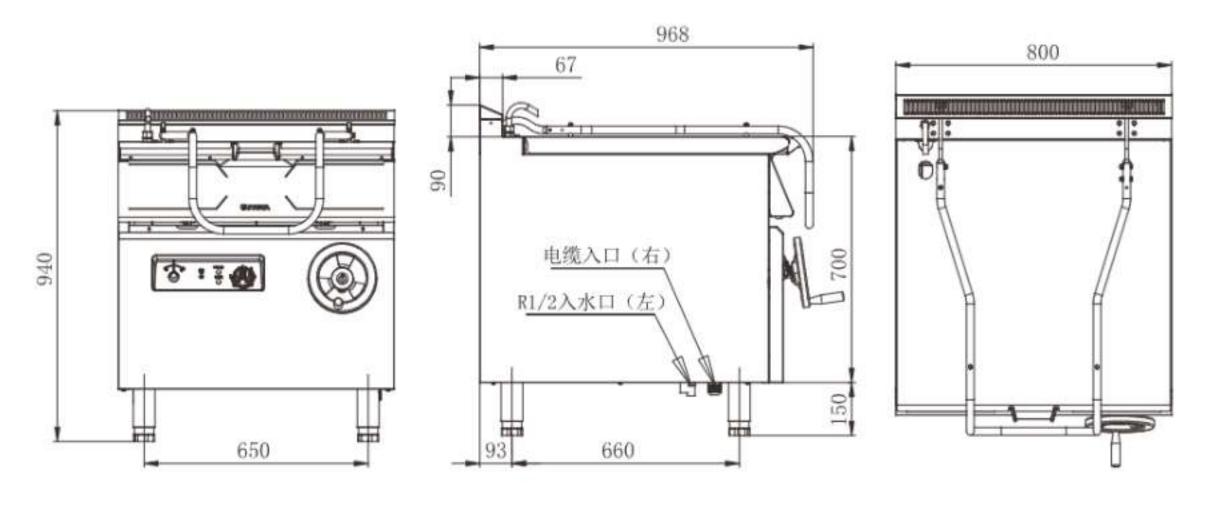

型号Model	功率Power(kw)	电压Volts (V)	容量Capacity(L)	净重/毛重(KG)	规格Dimensions(mm)
V9-TS	12	380	80	130 / 160	800×900×(850+90)

特点


- 一炉多用煎、炒、扒、煮样样精通,性价比高。
- 外壳使用304材质,铸铁烟道装饰条。
- · 锅体采用304不锈钢材质,锅底采用316厚10mm不锈钢材料,保证锅的耐 腐蚀性及热传导的均衡。
- 可倾式锅体设计,最大限度地方便用户转移锅内食品。
- 自动控温设置,温控范围50~300℃可调。
- 超温保护功能,最高限温340℃,确保使用安全.
- 锅体可倾提升翻转功能,手动升降可精确控制提升高度,锅起断电装置。
- 易于清洁的锅底圆弧设计,最大限度的避免卫生死角。
- 便于清理锅内残渣。
- 高效能铸铁储能板, 防止热能过早流失, 提高热效率, 保障锅底部的热均 匀性。
- · 6寸不锈钢可调脚,可调范围正负25mm可调。

Features

- . This product is multifuntional and can be used for frying, stir frying, cooking steak and braising, which means that it has extremely high price-performance ratio.
- The housing is made of 304 stainless steel and decorated with cast iron flue trims.
- The pan is made of 304 stainless steel with a bottom made of 10mm thick 316 stainless steel plate to ensure the corrosion resistance of the pan and even heat conduction.
- It adopts titling pan design to help users remove the food inside the pan.
- Automatic temperature setting with a temperature range of 50-300°C.
- Equipped with safety thermostats, the cooker's maximum temperature is 340°C to ensure safety.
- . The pan can be lifted and turned upside down. Lifting the pan annually can accurately control the lifting height. A device is adopted to cut off power supply when the pan is removed.
- . The bottom of the pan adopts curved design to make sure it can be completely cleaned.
- . It is easy to clean the residues in the pan.
- . It adopts high-efficiency iron energy-storage boards to avoid early loss of heat and improve heat efficiency, thus ensuring even heat on the bottom of the cooker.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.

可倾斜式燃气炒锅 Gas Tilting Braising Pan



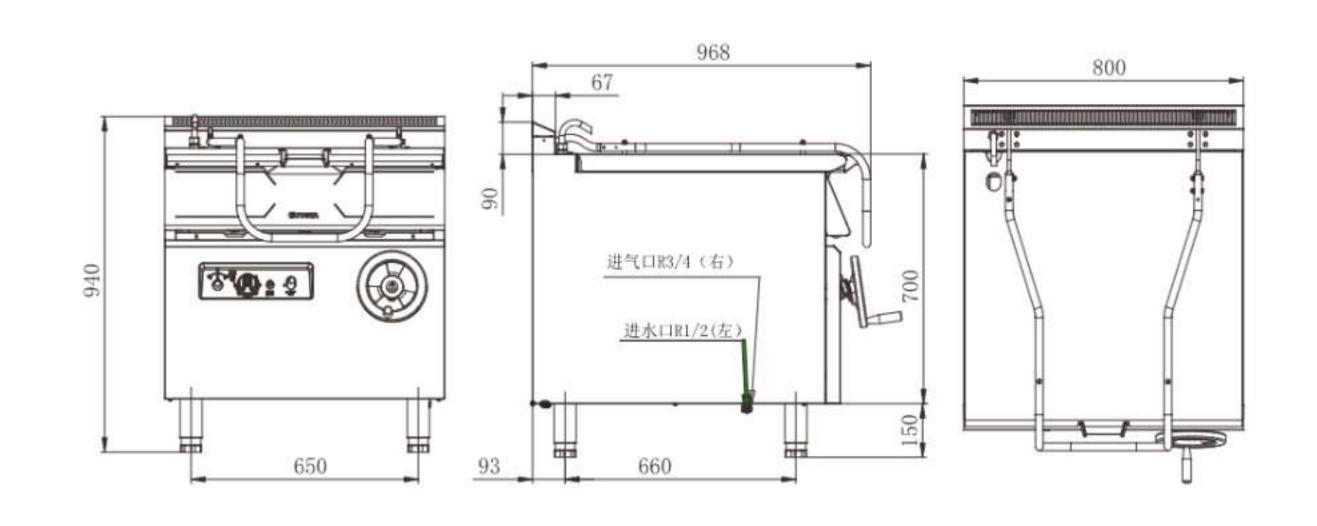

型号Model	功率 Power(kw)	容量Capacity(L)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas C	onsumption
SDGT21-V9-RS (天然气)	21	80	140 / 215	800×900× (850+90)	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SDGY21-V9-RS (液化气)				******	1.75	2.22


- 一炉多用煎、炒、扒、煮样样精通,性价比高。
- 外壳使用304材质,铸铁烟道装饰条。
- · 锅体采用304不锈钢材质,锅底采用316厚10mm不锈钢材料,保证锅的耐 腐蚀性及热传导的均衡。
- 可倾式锅体设计,最大限度地方便用户转移锅内食品。
- 自动控温设置,温控范围50~300℃可调。
- 超温保护功能,最高限温340℃,确保使用安全.
- 锅体可倾提升翻转功能,手动升降可精确控制提升高度,锅起断电装置。
- 易于清洁的锅底圆弧设计,最大限度的避免卫生死角。
- 便于清理锅内残渣。
- 高效能铸铁储能板, 防止热能过早流失, 提高热效率, 保障锅底部的热均 匀性。
- 6寸不锈钢可调脚,可调范围正负25mm可调。

- This product is multifuntional and can be used for frying, stir frying, cooking steak and braising, which means that it
- has extremely high price-performance ratio. The housing is made of 304 stainless steel and decorated with cast iron flue trims.
- The pan is made of 304 stainless steel with a bottom made of 10mm thick 316 stainless steel plate to ensure the corrosion resistance of the pan and even heat conduction.
- It adopts titling pan design to help users remove the food inside the pan.
- Automatic temperature setting with a temperature range of 50-300°C.
- Equipped with safety thermostats, the cooker's maximum temperature is 340°C to ensure safety.
- . The pan can be lifted and turned upside down. Lifting the pan annually can accurately control the lifting height. A device is adopted to cut off power supply when the pan is removed.
- The bottom of the pan adopts curved design to make sure it can be completely cleaned.
- It is easy to clean the residues in the pan.
- It adopts high-efficiency iron energy-storage boards to avoid early loss of heat and improve heat efficiency, thus ensuring even heat on the bottom of the cooker.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.



燃气夹层汤锅 Gas Jacketed Boiling Pan



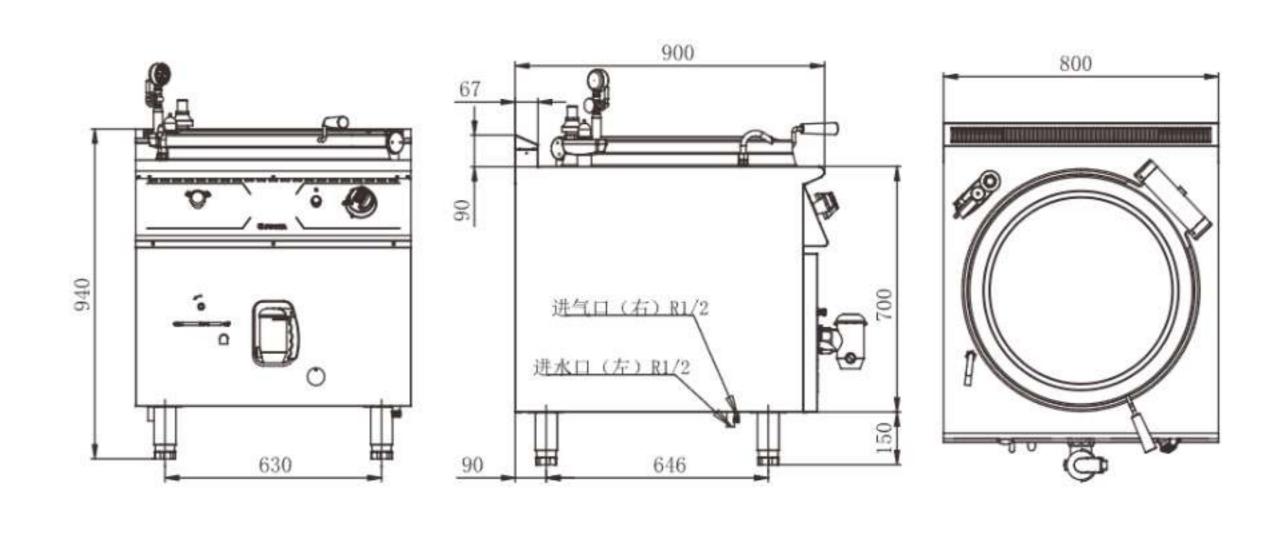

型号Model	功率 Power(kw)	压力(kPa) Pressure	容量Capacity(L)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Co	onsumption
SDGT25-V9-RO150 (天然气)	25	≤50	150	150/220	800×900× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SDGY25-V9-RO150 (液化气)				TO THE PERSON OF	汤锅直径: Φ600mm	2.08	2.56

特点

- ·功率大,升温快,高效节能,高压加热,安全可靠,防干烧。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ・进水、排水方便快捷。
- · 可调节炉脚。
- ·汤桶内置过滤网,操作简单。


Features


- With high power output, this product can heat up fast and ensures high efficiency and energy conservation. High pressure heating makes it safe and reliable. Dry heating could be avoided.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · The cooking pot has strainer inside it, which makes it easy to operate.


1

燃气夹层汤锅 Gas Jacketed Boiling Pan



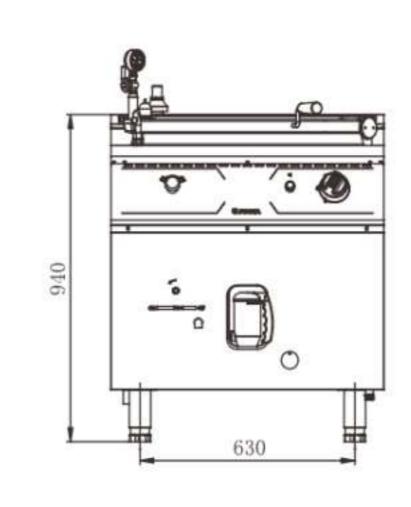

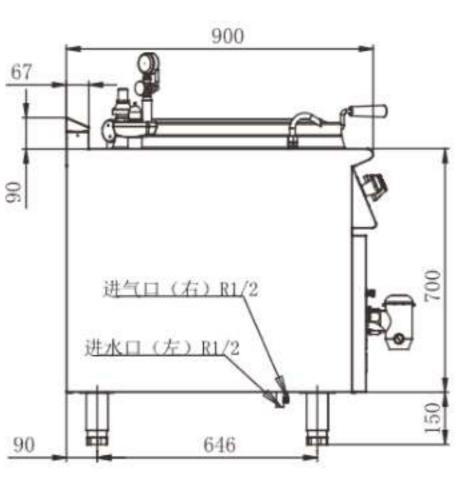

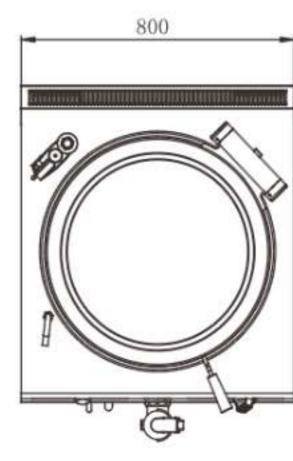

型号Model	功率 Power(kw)	压力(kPa) Pressure	容量Capacity(L)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Co	onsumption
SDGT25-V9-RO100 (天然气)	25	≤50	100	137 / 207	800×900× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SDGY25-V9-RO100 (液化气)					汤锅直径: Φ600mm	2.08	2.56


特点


- ·功率大,升温快,高效节能,高压加热,安全可靠,防干烧。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- ·汤桶内置过滤网,操作简单。


- With high power output, this product can heat up fast and ensures high efficiency and energy conservation. High pressure heating makes it safe and reliable. Dry heating could be avoided.
- All Stainless steel body,nice-looking and easy to clean.
- Water can be easily poured in and drained.
- It is equipped with adjustable feet.
- The cooking pot has strainer inside it, which makes it easy to operate.

电夹层汤锅 Electric Jacketed Boiling Pan



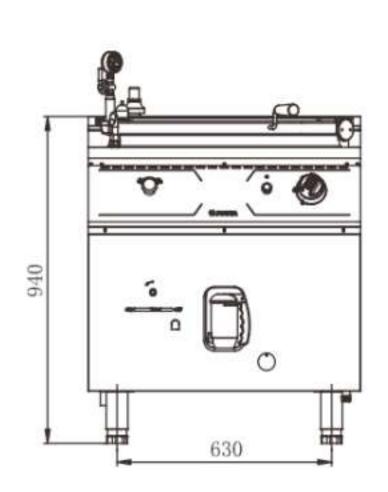

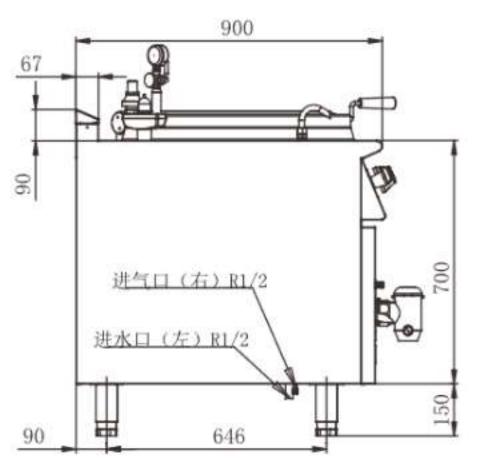

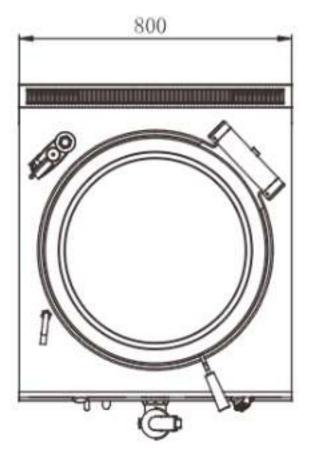

型号Model	功率 Power(kw)	压力(kPa) Pressure	容量Capacity(L)	电压Volts (V)	净重/毛重 (KG)	规格Dimensions(mm)
V9-TO100	18	≤50	100	380	122 / 190	800×900× (850+90) 汤锅直径: Φ600mm

特点


- ·功率大,升温快,高效节能,高压加热,安全可靠,防干烧。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- ·汤桶内置过滤网,操作简单。


Features


- With high power output, this product can heat up fast and ensures high efficiency and energy conservation. High pressure heating makes it safe and reliable. Dry heating could be avoided.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- The cooking pot has strainer inside it, which makes it easy to operate.

电夹层汤锅 Electric Jacketed Boiling Pan



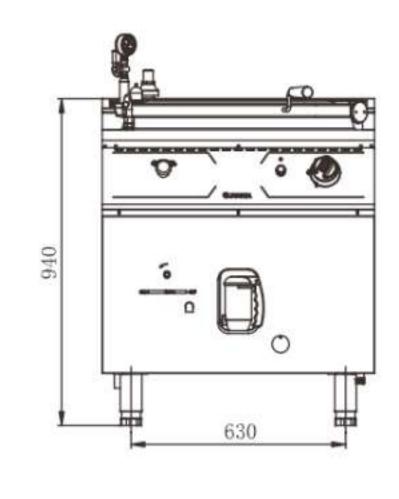

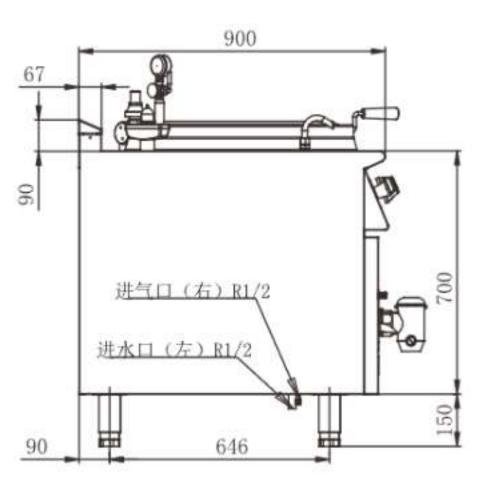

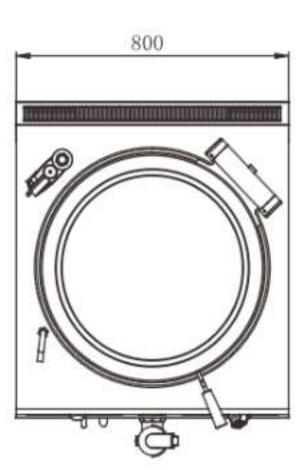

型号Model	功率 Power(kw)	压力(kPa) Pressure	容量Capacity(L)	电压Volts (V)	净重/毛重 (KG)	规格Dimensions(mm)
V9-TO150	24	≤50	150	380	130 / 202	800×900× (850+90) 汤锅直径: Φ600mm

特点


- ·功率大,升温快,高效节能,高压加热,安全可靠,防干烧。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- ·汤桶内置过滤网,操作简单。

- With high power output, this product can heat up fast and ensures high efficiency and energy conservation. High pressure heating makes it safe and reliable. Dry heating could be avoided.
- All Stainless steel body, nice-looking and easy to clean.
- Water can be easily poured in and drained.
- It is equipped with adjustable feet.
- The cooking pot has strainer inside it, which makes it easy to operate.



燃气烧烤炉连柜座 Gas Lava Rock Grill With Cabinet



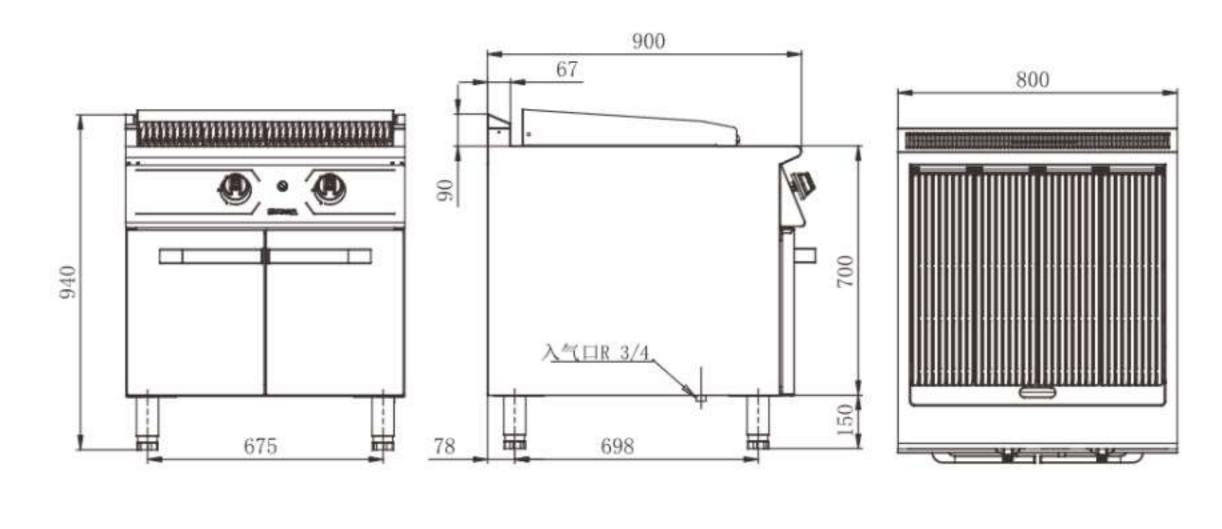

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SSKT17-V9-RH (天然气)	17 — 128 / 206	800×900× (850+90) 烤网尺寸/Griddle size:	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)		
SSKY17-V9-RH (液化气)	***		120 / 200	720 × 600 × 20	1.41	1.8

特点

- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- ·铸铁烤网保持热惯性。
- ·可调节炉脚。


Features

- High power output, quick heating and high efficiency.
- All Stainless steel body,nice-looking and easy to clean;
- · The cast iron grid can keep thermal inertia.
- · It is equipped with adjustable feet.

**

燃气烧烤炉连柜座 Gas Lava Rock Grill With Cabinet



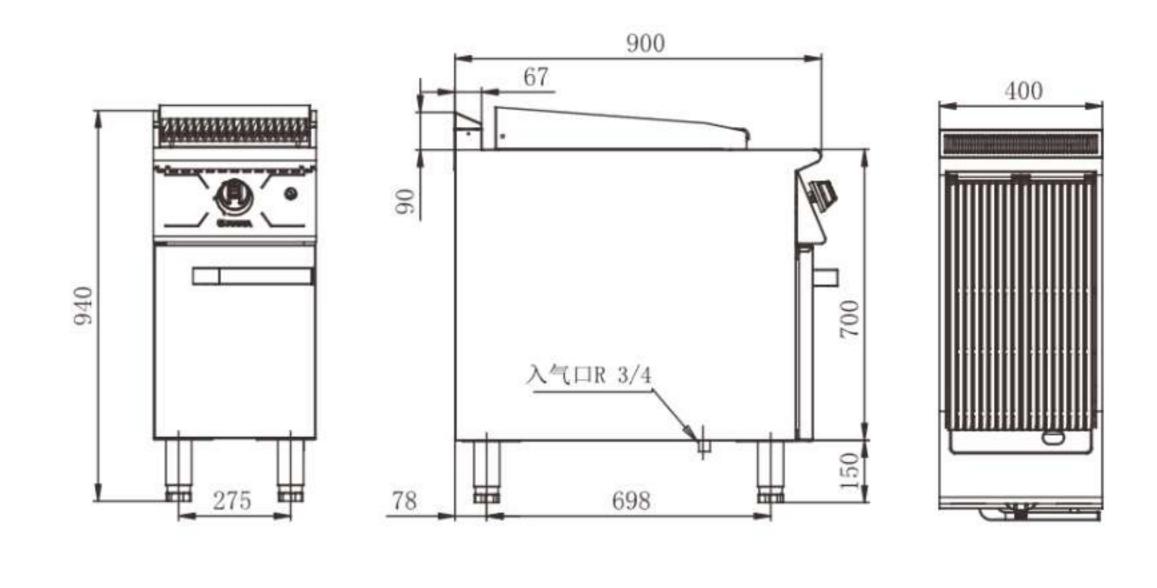

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas (Consumption
SSKT8.5-V9-RHA (天然气)			68 / 121	400×900×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SSKY8.5-V9-RHA (液化气)	8.5			烤网尺寸/Griddle size: 350×610×20	0.6	0.88


特点

- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- 铸铁烤网保持热惯性。
- ·可调节炉脚。

- · High power output, quick heating and high efficiency.
- All Stainless steel body,nice-looking and easy to clean;
- The cast iron grid can keep thermal inertia.
- It is equipped with adjustable feet.

电烧烤炉连柜座 Electric Radiant Grill With Cabinet



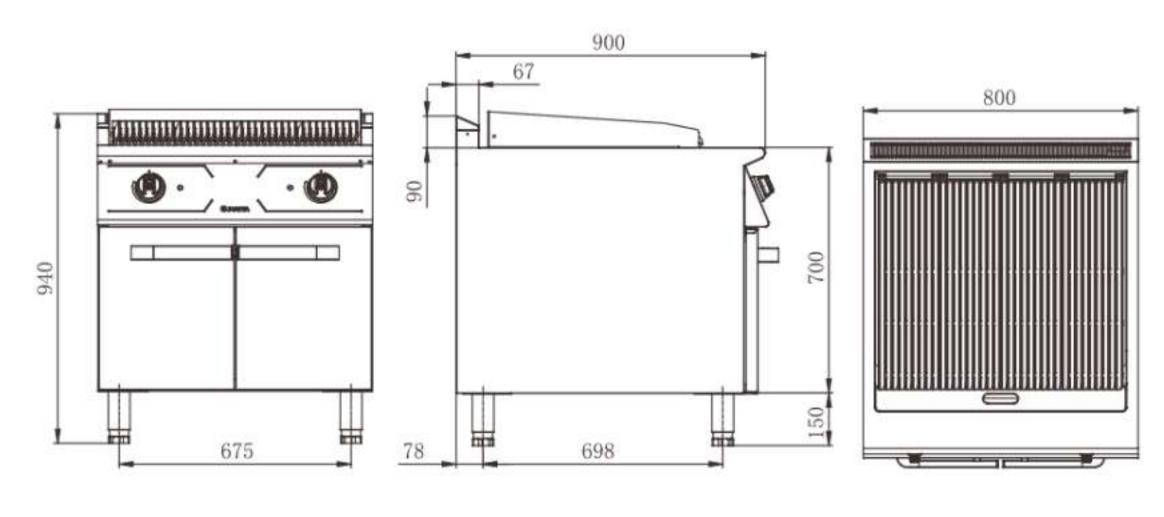

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TH	12	380	125 / 203	800×900× (850+90) 烤网尺寸/Griddle size: 720×600×20

- ・功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 铸铁烤网保持热惯性。
- 可调节炉脚。


Features


- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- The cast iron grid can keep thermal inertia.
- · It is equipped with adjustable feet.

电烧烤炉连柜座 Electric Radiant Grill With Cabinet





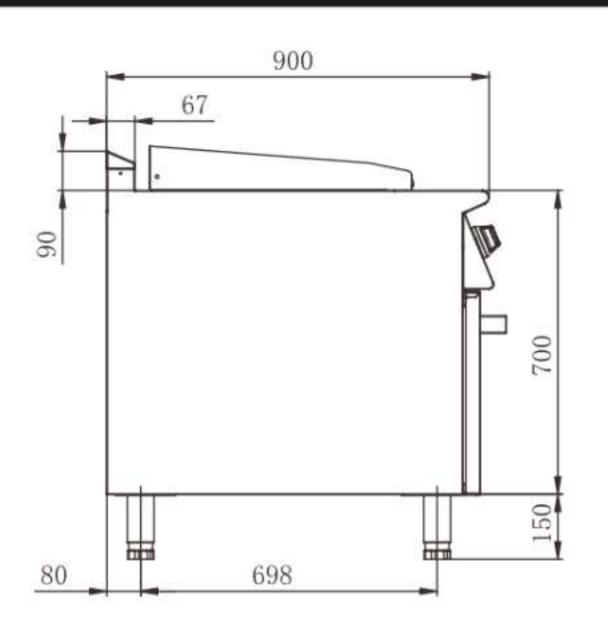

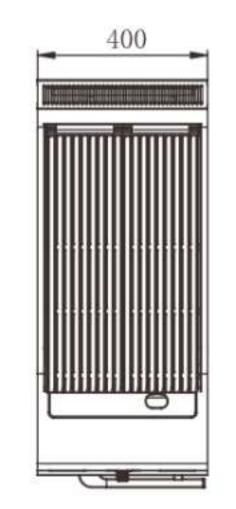

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-TH-400	6	380	65 / 118	400×900× (850+90) 烤网尺寸/Griddle size: 350×610×20

特点

- · 功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 铸铁烤网保持热惯性。
- 可调节炉脚。


(Features)

- High power output, quick heating and high efficiency.
- All Stainless steel body, nice-looking and easy to clean.
- · The cast iron grid can keep thermal inertia.
- It is equipped with adjustable feet.



西式炒炉 Gas Wok Range



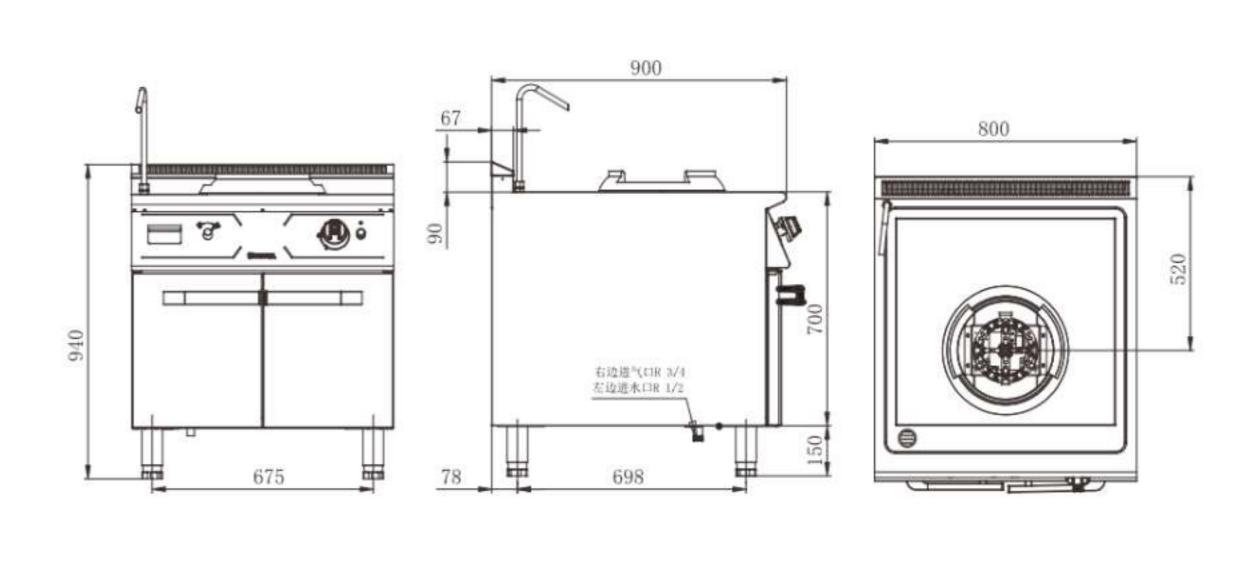

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas (Consumption
SZCT20-V9-CR (天然气)	20	142 / 212	800×900× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZCY20-V9-CR (液化气)	20	172/212		1.66	2.12

特占


- ·双层加厚设计:加厚板材、保证炉具的高强度和高韧性,经久耐用,不易变形。
- ·高效能炉头,效率高,性价比强;自有熄火保护装置,安全又放心。

Features

- Double-layer design of thickened plates ensures high stiffness and toughness of the cooker, making it durable and tenacious.
- It adopts high-efficiency burners ensuring high efficiency and price—performance ratio. The built-in flame failure protection device ensures safety.

四头电磁炉连柜座 Hot Plate with Cabinet



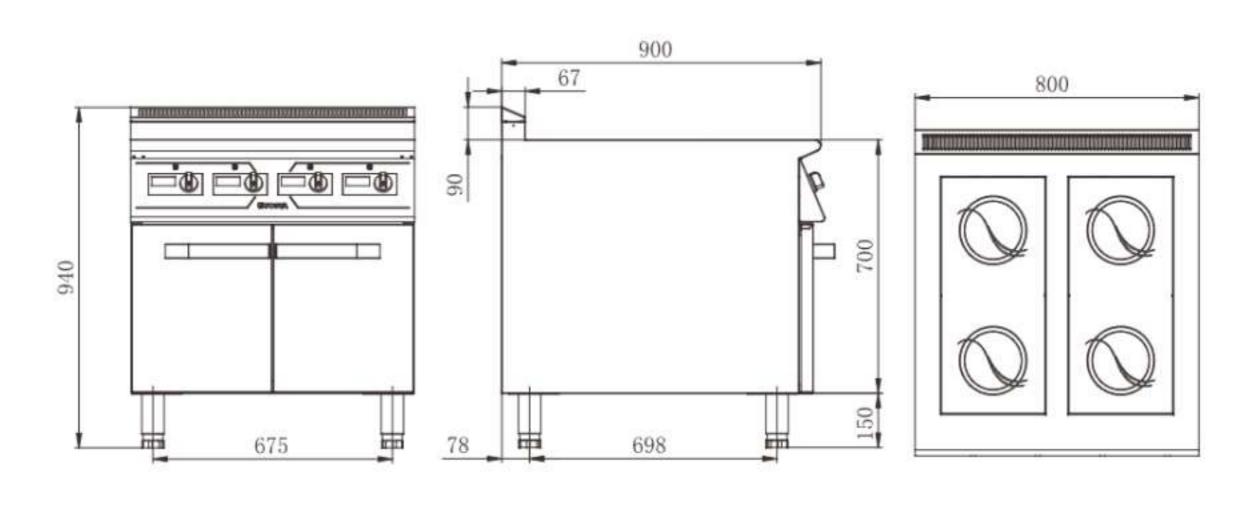


型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V9-IC-4	5x4	380	82 / 152	800×900× (850+90)

特点

- 面板一体拉伸成型,无缝焊接,便于清洁。
- · 独立4个烹饪区,每个5KW,8档调节。
- 高强度耐磨微晶板, 防刮耐磨。
- 高效散热,8道大范围散热口,有效提升散热能力。
- · 采用技术领先的德国 "Infineon" IGBT模块, 性能稳定。
- 国家专利线盘,无盲区,火力更均匀。

- Countertop plate with one stretch forming and seamless welding, easy for cleaning.
- · 4 separate cooking burners and each one is 5KW, 8 different selections.
- High strength and wear-resisting microcrystalline plate, it is anti-scraping and wear-resisting.
- 8 pcs wide range of heat dissipation with high efficiency, effectively improves heat dissipation capacity.
- Adopt advanced "Infineon" IGBT module from Germany with stable performance
- · .National patent wire coil, without blind area and with more even firepower.

电动可倾斜汤锅 Electric Tilting Boiling Pan

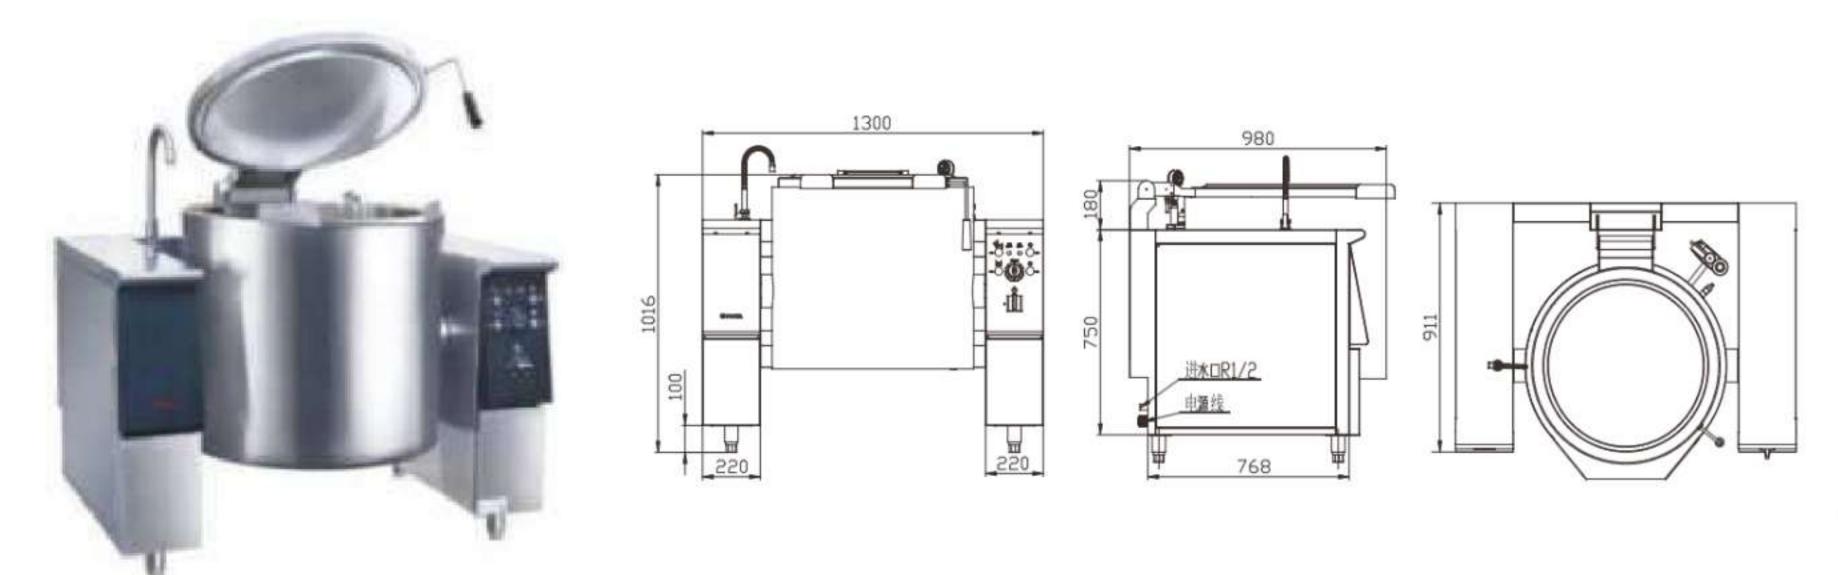

型号Model	功率Power(kw)	电压Volts (V)	容量Capacity(L)	规格Dimensions(mm)
VT-TO150	25	380	150	1300x900x850 汤锅尺寸(mm);Φ 600x520mm


特点

- 电动倾斜锅体,倒汤简单方便。
- 锅体自动旋转,操作安全方便。
- 超压保护、超温保护、缺水保护。
- 高效发热管,升温迅速,节能环保。
- 功能按钮一键操作,稳定安全,操作简单。

Features

- · Electric tilt pot, easy to pour soup.
- The pot body rotates automatically, and the operation is safe and convenient.
- Overpressure protection, overtemperature protection and water shortage protection.
- High efficiency heating tube, rapid heating, energy saving and environmental protection.
- · Function button one button operation, stable and safe, simple operation.

工作台连柜座 Neutral Working Table With Cabinet

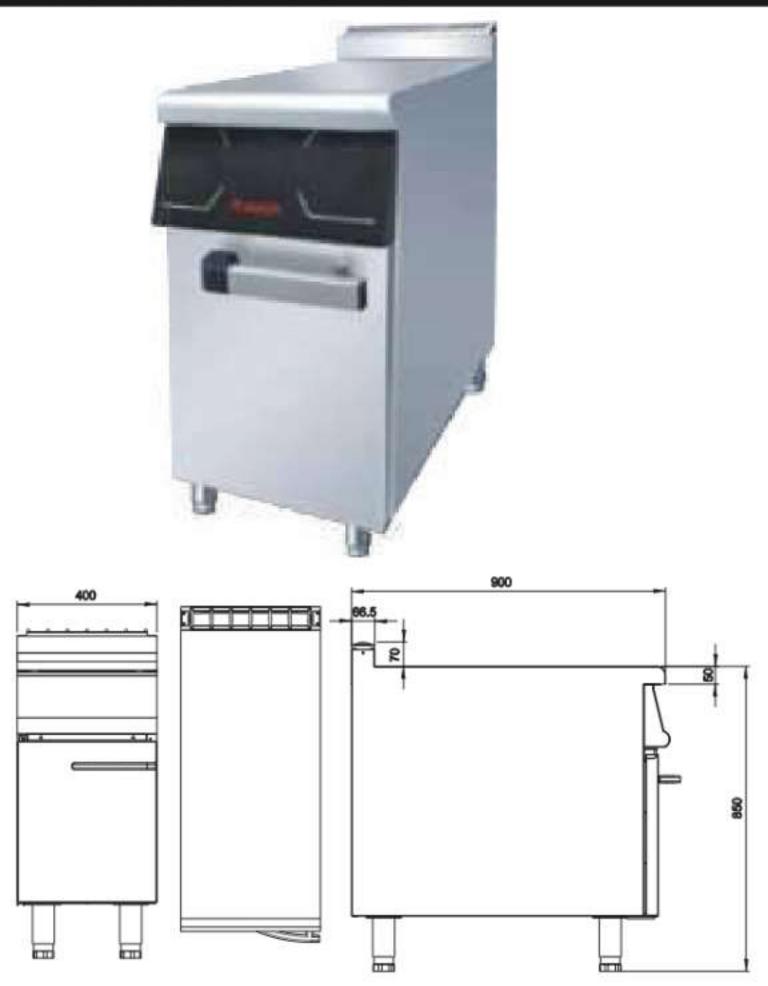

型号Model	V9-GT400
净重/毛重(KG)	35 / 62
规格 Dimensions (mm)	400×900× (850+70)


备注:

1200mm长产品外包装尺寸:1300×1050×1000mm 800mm长产品外包装尺寸:900×1050×1000mm 400mm长产品外包装尺寸:500×1050×1000mm



四头燃气煲仔炉连焗炉 Gas Range 4 Burner With Gas Oven



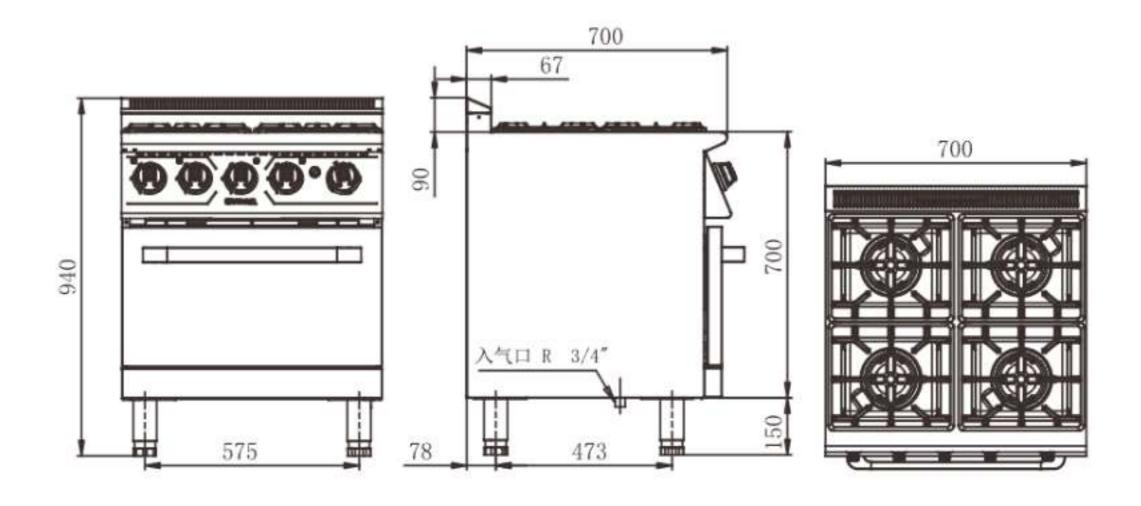

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT26+KXT5.8-V7-RQ-4 (天然气)	6.5 × 4+5.8	115 / 169	700×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20+KXY5.8-V7-RQ-4 (液化气)	5×4+5.8		焗炉尺寸/Oven Chamber Dimension:560×600×270	2.14	3.36

配件: 烤箱网架1个 Accessories:Oven wire rack: 1

特点

- 炉头手工点火,坚固耐用。
- 炉头采用精密铸造,火力稳定坚固耐用。
- 炉面模具拉伸成型,易于清洁。重型炉架,超长炉 柄,可使用于各种最小的锅。
- 带熄火保护及大小火控制装置,操作简单。
- 电烤箱带温度控制及超温保护功能,最高限温 275度。
- 炉分上下加热区,可独立温控控制,节约能源。


Features

- · Manual ignition of furnace head, strong and durable.lar flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with a flame failure device and a flame size control device and it is easy to operate.
- The oven offers temperature control and flame failure protection functions to achieve even temperature distribution. The highest temperature can reach 275 °C.
- The oven is divided into upper and lower heating areas, which can be controlled by independent temperature control to save energy.

M

四头燃气煲仔炉连柜座 Gas Range 4 Burner With Cabinet



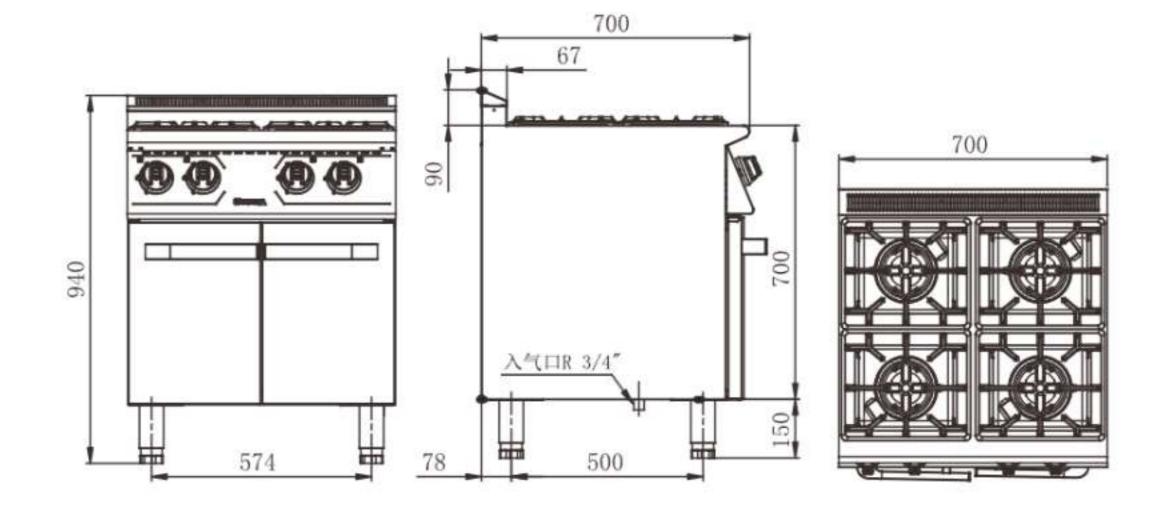

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consumption	
SPTT26-V7-RA-4 (天然气)	6.5×4	100 / 154	700 700 (050 00)	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SPTY20-V7-RA-4 (液化气)	5×4	1007134	700×700×(850+90)	1.66	2.75

特点


- · 炉头采用精密铸造, 镀硬铬加工而成, 火力稳定经久耐用。
- · 炉头为花型火焰设计,效率高节能,火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 炉头位于水盆凸起部位, 可防止溢出。
- · 重型炉架, 超长炉柄, 可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。

- The burners are manufactured through precision casting and plated with hard chrome to make sure that flames are stable and endurable.
- The crown burner design to ensure high efficiency and save energy. Besides, the flames is adjustable.
- · Stretch forming cooking surface, easy to clean.
- The burners are located in the projected part of the basin and prevent water from overflowing.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with flame failure and flame size control device and easy to operate.

**

六头燃气煲仔炉连焗炉Gas Range 6 Burner With Gas Oven



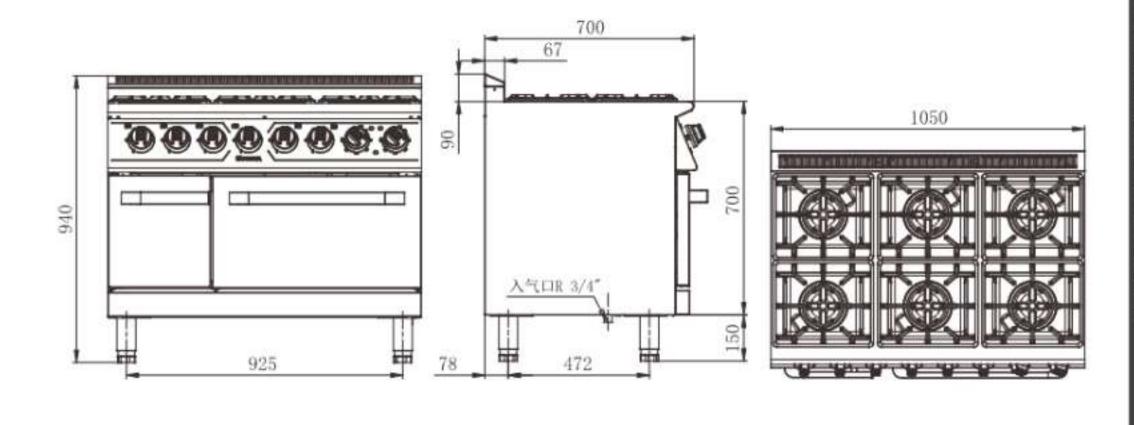

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas (Consumption
SPTT39-V7-TQ-6 (天然气)	6.5x6+4.8	380	144 / 225	1050x700x(850+90) 焗炉尺寸/Oven Chamber Dimension:560×600×270	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY30-V7-TQ-6 (液化气)	5x6+4.8	380			2.49	4.13

配件: 烤箱烤网1个 Accessories:Oven wire rack: 1

特点

- · 炉头功率可达6.5KW, 环形火焰设计, 效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- · 炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架,超长炉柄,可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。
- · 焗炉带温度控制及超温保护功能,最高限温340度。


Features

- The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · The flame of the burner is adjustable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove can be used for frying, stewing and roasting with very small cookers.
- · It is equipped with flame failure and flame size control device and easy to operate.
- The oven offers temperature control and over temperature protection function to achieve even temperature distribution. The highest temperature can reach 340 °C.

1

六头燃气煲仔炉连柜座 Gas Range 6 Burner With Cabinet



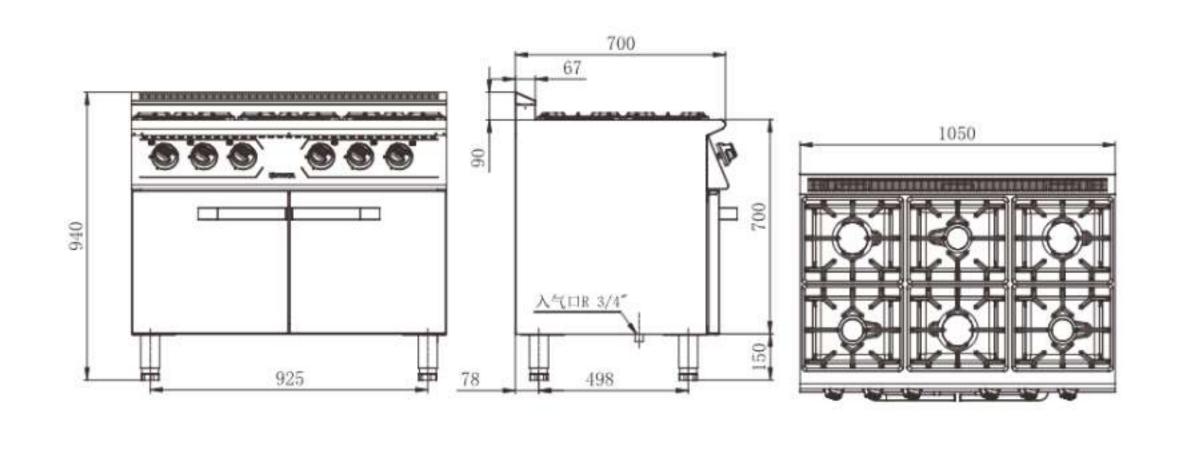

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consumption	
SPTT24-V7S-RA-6 (天然气)	4.5 × 3+3.5 × 3	135 / 215	4050~700~(050+00)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20-V7S-RA-6 (液化气)	4x3+2.8x3		1050×700×(850+90)	1.7	2.54

特点


- · 炉头功率多种且易于更换,有9KW、7.5KW、4.5KW、3.5 KW供客户选择。
- · 炉头采用精密铸造, 镀硬铬加工而成, 火力稳定经久耐用。
- · 炉头为花型火焰设计,效率高节能,火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 炉头位于水盆凸起部位, 可防止溢出。
- · 重型炉架, 超长炉柄, 可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。

- Burners with different power outputs (9KW, 7.5KW, 4.5KW and 3.5KW) are available and easy to replace.
- The burners are manufactured through precision casting and plated with hard chrome to make sure that flames are stable and endurable.
- The crown burner design to ensure high efficiency and save energy. Besides, the flame is adjustable.
- Stretch forming cooking surface, easy to clean.
- The burners are located in the projected part of the basin and prevent water from overflowing.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- It is equipped with flame failure and flame size control device and easy to operate.



燃气六头煲仔炉连柜座 Gas Range 6 Burner With Cabinet



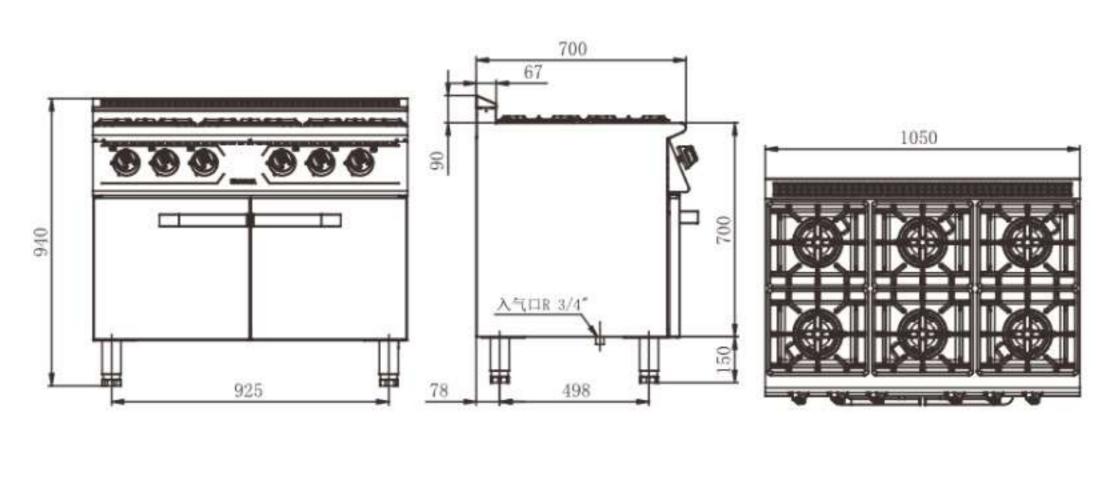

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT39-V7-RA-6 (天然气)	6.5×6	405 / 045	1050×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY30-V7-RA-6 (液化气)	5×6	135 / 215	1030 × 700 × (030 130)	2.49	4.13

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- · 炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架,超长炉柄,可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。


Features

- The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · The flame of the burner is adjustable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- it is also equipped with a flame failure device and a flame size control device and easy to operate.



四头燃气煲仔炉连电焗炉 Gas Range 4-Burner With Electric Oven



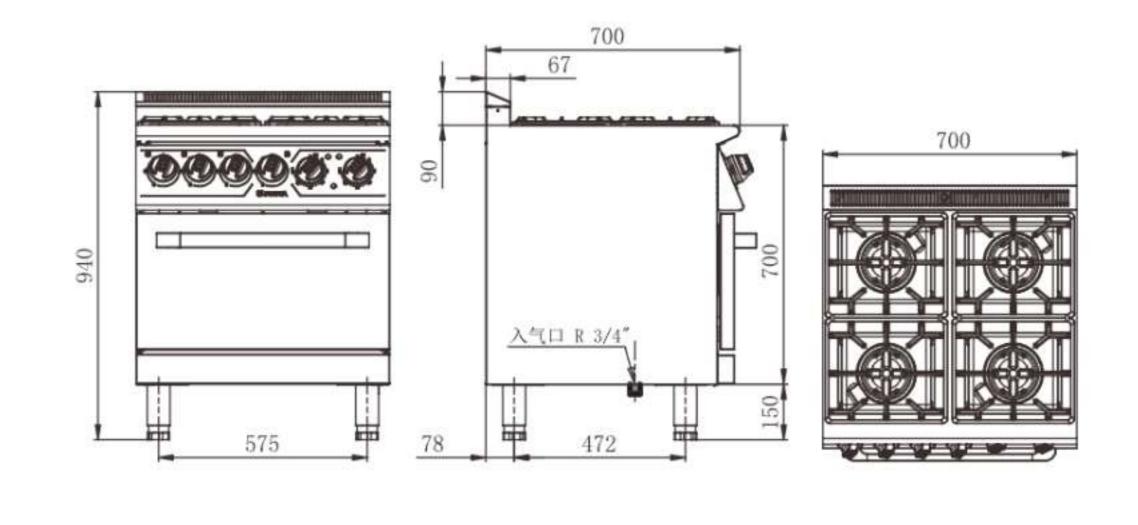

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT26-V7-TQ-4 (天然气)	6.5×4+4.8		700×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20-V7-TQ-4 (液化气)	5×4+4.8	111 / 165	焗炉尺寸/Oven Chamber Dimension: 560×600×270	1.66	2.75

特点


- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- ·炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架,超长炉柄,可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。

- The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · The flame of the burner is adjustable.
- Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- it is also equipped with a flame failure device and a flame size control device and easy to operate.

ME

四头燃气煲仔炉连柜座 Gas Range 4-Burner With Cabinet



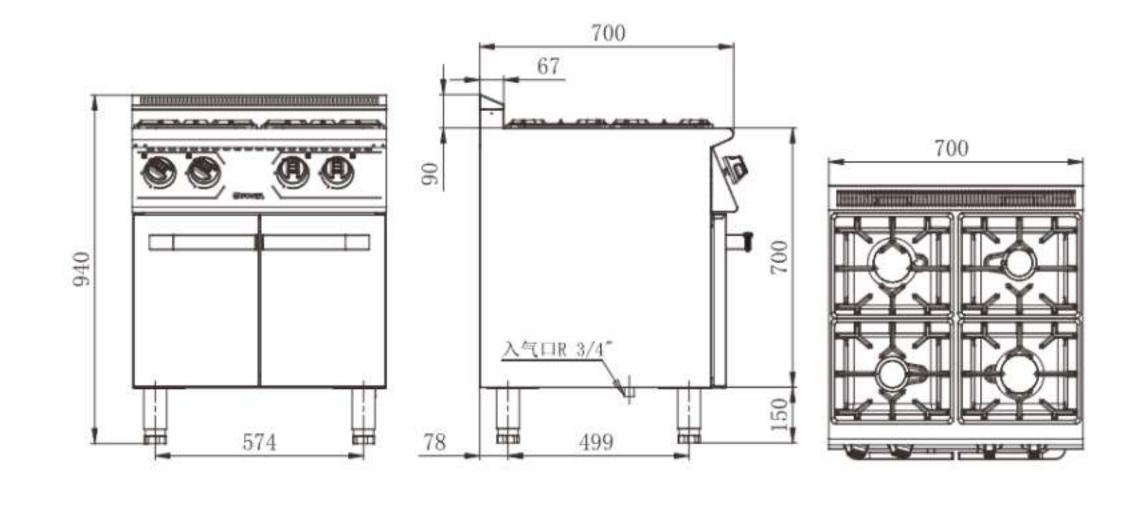

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consumption	
SPTY13-V7S-RA-4 (天然气)	4.5×2+3.5×2	400 / 400	700×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTT16-V7S-RA-4 (液化气)	4×2+2.8×2	100 / 169		1.66	2.75

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- · 炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架, 超长炉柄, 可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。


Features

- The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- · The flame of the burner is adjustable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- it is also equipped with a flame failure device and a flame size control device and easy to operate.



四头燃气煲仔炉连焗炉 Gas Range 4-Burner With Oven



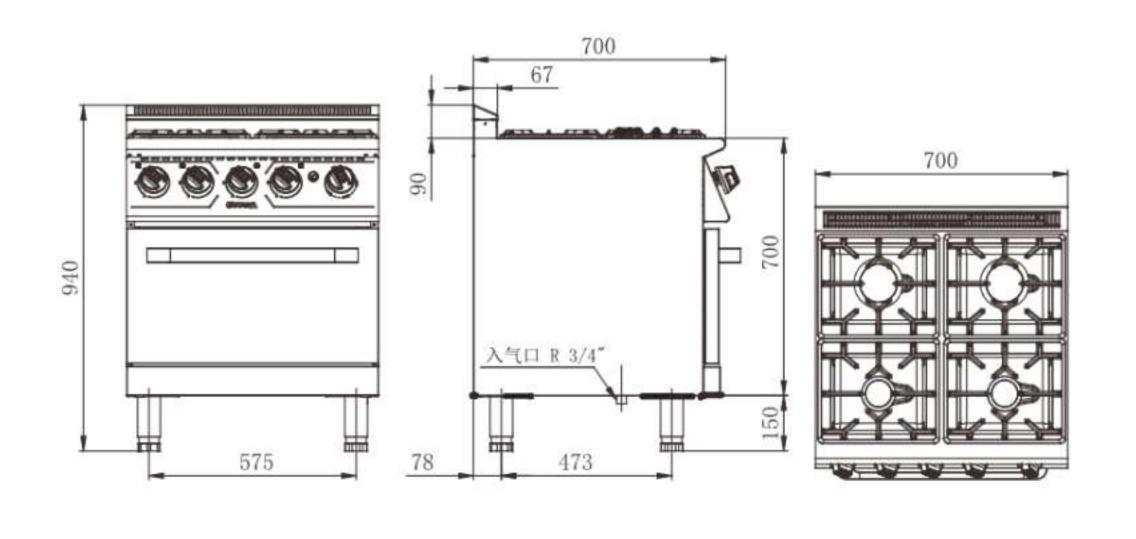

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas (Consumption
SPTT16+KXT5.8-V7S-RQ-4 (天然气)	4.5 × 2+3.5 × 2+5.8	115 / 169	700×700×(850+90) 焗炉尺寸/Oven Chamber Dimension: 560×600×270	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY13+KXY5.8-V7S-RQ-4 (液化气)				1.6	2.31

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- · 炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架,超长炉柄,可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。


- The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- The flame of the burner is adjustable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- it is also equipped with a flame failure device and a flame size control device and easy to operate.



*

六头燃气煲仔炉连焗炉 Gas Range 6-Burner With Gas Oven



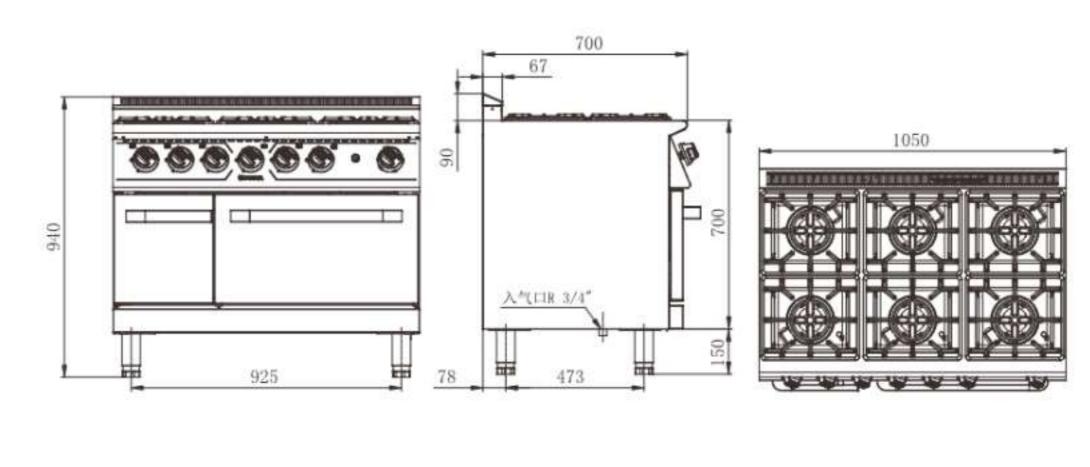

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SPTT39+KXT5.8-V7-RQ-6 (天然气)	6.5×6		1050×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY30+KXY5.8-V7-RQ-6 (液化气)	5×6	155 / 235	焗炉尺寸/ Oven Chamber Dimension: 560×600×270	2.97	4.74

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- · 炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架,超长炉柄,可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。


Features

- The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- The flame of the burner is adjustable.
- Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- it is also equipped with a flame failure device and a flame size control device and easy to operate.



六头燃气煲仔炉连焗炉 Gas Range 6-Burner With Gas Oven



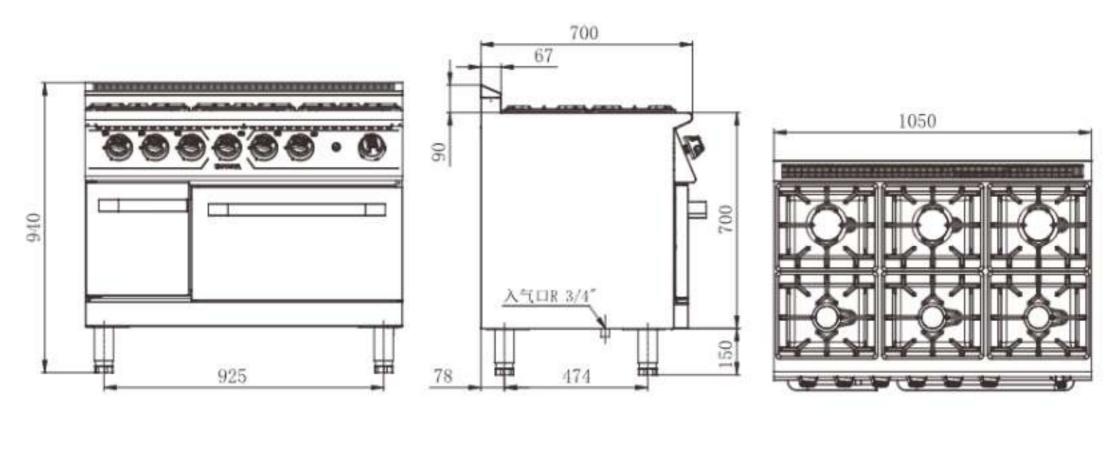

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas(Consumption
SPTT24+KXT5.8-V7S-RQ-6 (天然气)	$4.5 \times 3+$ $3.5 \times 3+5.8$	455 1005	1050×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SPTY20+KXY5.8-V7S-RQ-6 (液化气)	4 × 3+ 2.8 × 3+5.8	155 / 235	焗炉尺寸/ Oven Chamber Dimension: 560×600×270	2.18	3.15

特点

- · 炉头功率可达6.5KW,环形火焰设计,效率高。
- · 炉头采用精密铸造, 火力稳定坚固耐用。
- · 炉头火焰大小可调节。
- · 炉面模具拉伸成型, 易于清洁。
- · 重型炉架,超长炉柄,可使用于各种最小的锅。
- · 带熄火保护及大小火控制装置, 操作简单。


- · The power output of the burner can reach 6.5KW. Annular flame ensures high efficiency.
- The burners are manufactured through precision casting to make sure that flames are stable and endurable.
- The flame of the burner is adjustable.
- · Stretch forming cooking surface, easy to clean.
- Equipped with heavy hobs and extra long handles, this stove applies to very small cookers.
- it is also equipped with a flame failure device and a flame size control device and easy to operate.

43



四头电煮食炉连电焗炉 Electric 4-Plate Cooker With Electric Oven



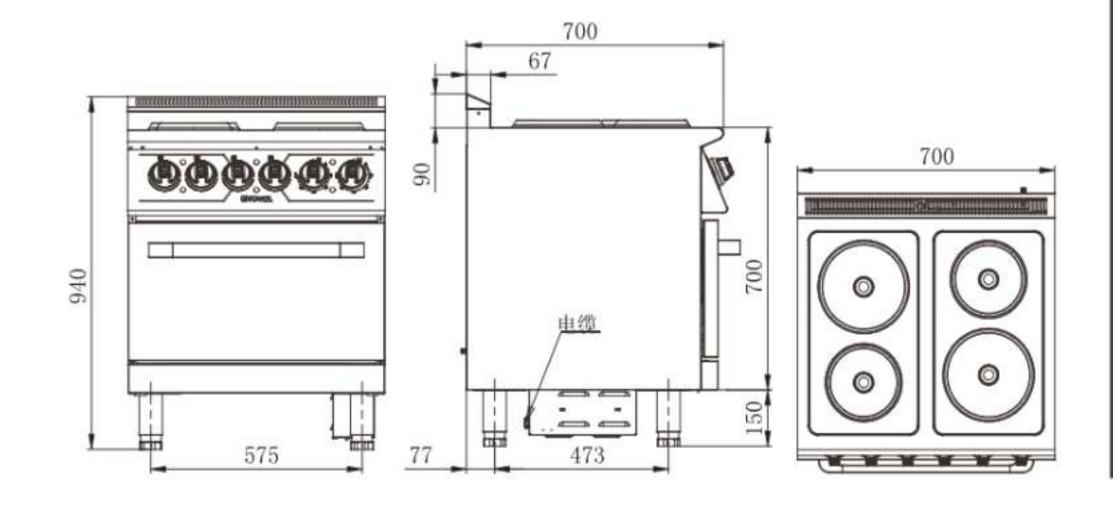

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TT-4	2×2+2.6×2+ (上1.8+下3)	380	94 / 141	700×700×(850+90) 焗炉尺寸/Oven Dimension: 560×600×270 焗炉温度: 50-275℃

特点


- · 壳体全部采用304不锈钢材质, 台面厚达1.5mm, 保证台面足够强度;
- ·核心部件(如电热板、温控器等)德国进口,最大限度保障性能稳定可靠;
- · 煮食炉三档调节,每个炉头单独按钮制;
- ·超温保护功能,确保使用安全;
- ·6寸不锈钢可调脚,可调范围正负25度可调。

Features

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to ensure strength.
- Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- The cooker has 3-position selector switches to adjust and regulate heating. One switch is provided for each burner.
- · It is equipped with safety thermostats to ensure safety.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.

四头电煮食炉连柜座 Electric 4-Plate Cooker With Cabinet



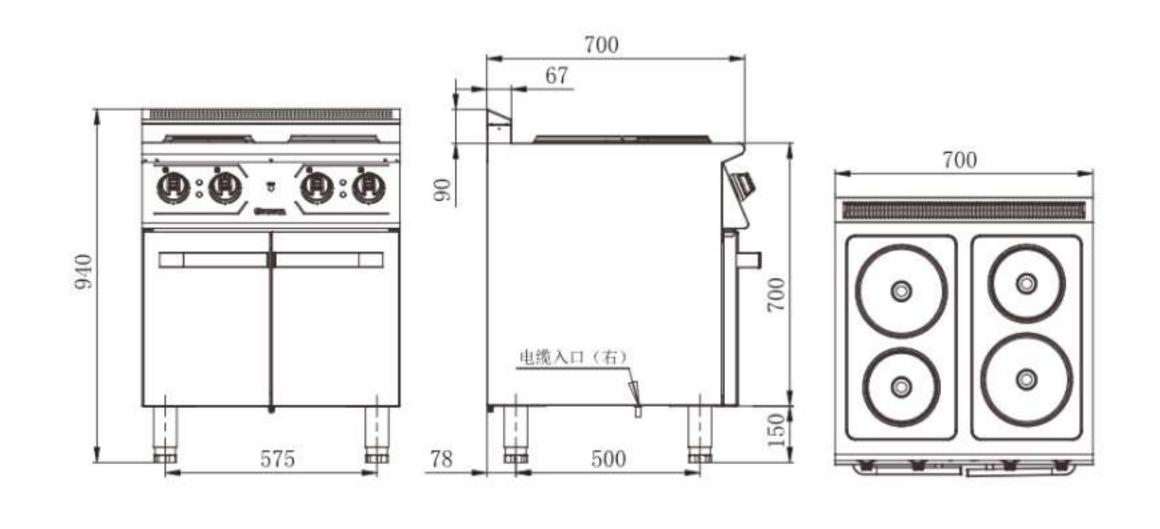

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TE-4	2×2+2.6×2	380	55 / 102	700×700×(850+90)


特点

- · 壳体全部采用304不锈钢材质, 台面厚达1.5mm, 保证台面足够强度;
- ·核心部件(如电热板、温控器等)德国进口,最大限度保障性能稳定可靠;
- · 煮食炉三档调节,每个炉头单独按钮制;
- ·超温保护功能,确保使用安全;
- ·6寸不锈钢可调脚,可调范围正负25度可调。

- The housing is made of 304 stainless steel and the worktop is 1.5mm thick thickness to ensure strength.
- Core accessories (including hot plates and thermostats) made in Germany are adopted to ensure stable and reliable performance.
- The cooker has 3-position selector switches to adjust and regulate heating. One switch is
 provided for each burner.
- · It is equipped with safety thermostats to ensure safety.
- · The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.

双缸双筛电炸炉连柜座Electric 2–Tank Fryer (2–Basket) With Cabinet



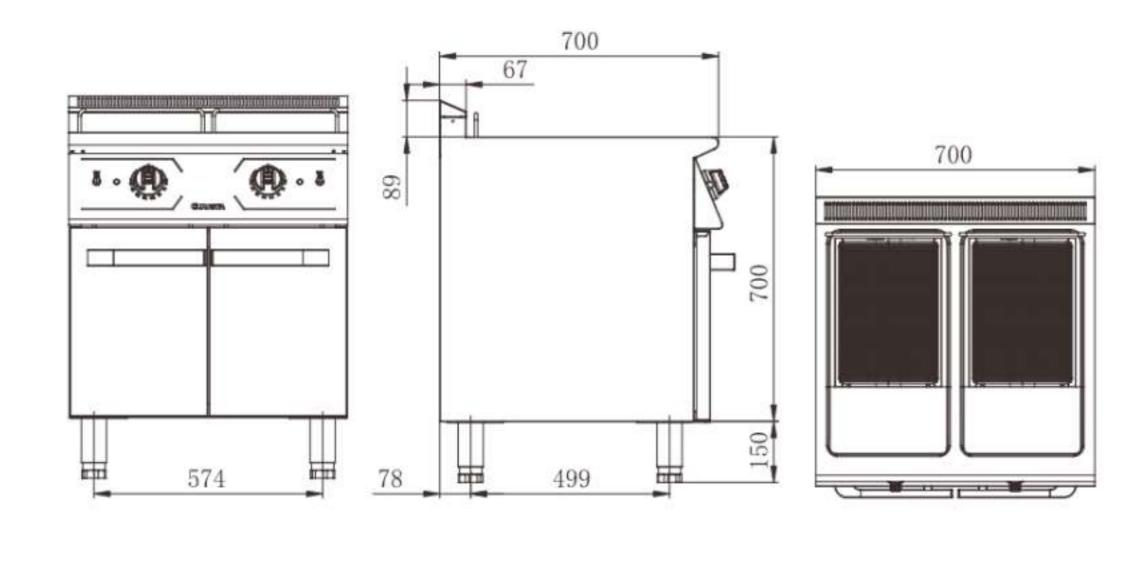

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	油缸容量/尺寸Capacity(L)	炸篮尺寸(mm)
V7-TC-2	24	380	77 / 170	700×700×(850+90)	24Lx2 / 260×360×200mm	310×230×150

特点


- · 全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- · "V"形冷凉区沉积渣物,防粘于发热管上烧焦。
- ・温度自动控制调节范围50℃~190℃,230℃超温保护。
- · 发热管加热, 传热效率高。

Features

- · All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- "V" shaped cold area deposits slag to prevent it from sticking to the heating pipe and burning.
- Automatic temperature control, adjustment range 50 °C ~ 190 °C, 230 °C overtemperature protection.
- · Heating tube heating, high heat transfer efficiency.

单缸单筛电炸炉连柜座 Electric 1–Tank Fryer (1–Basket) With Cabinet



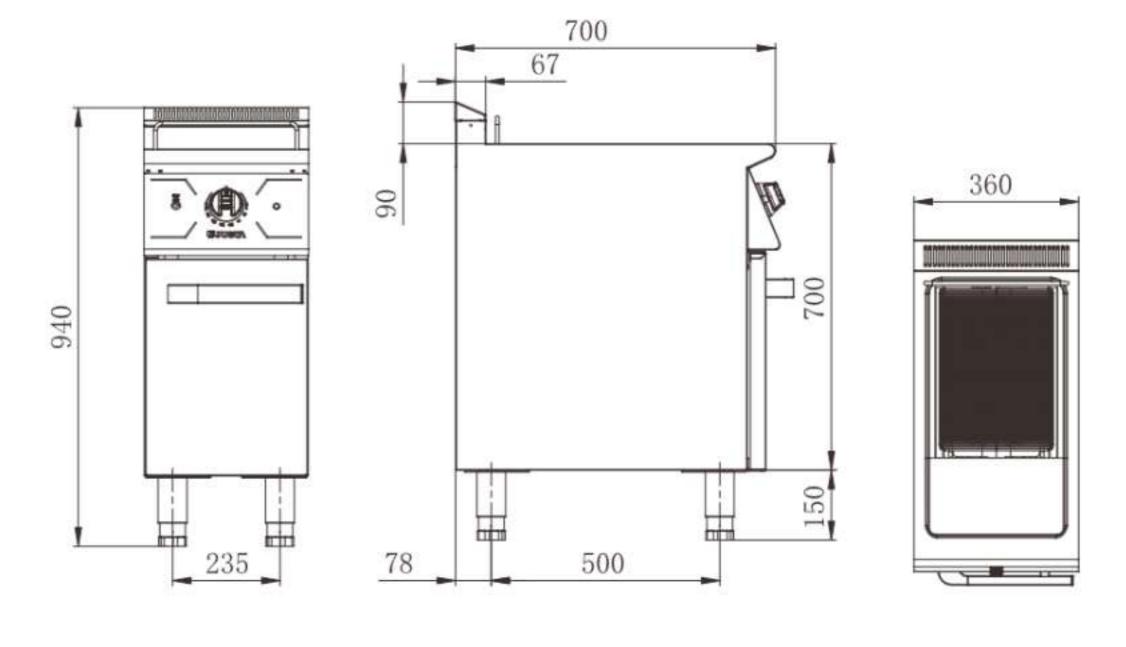

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	油缸容量/尺寸Capacity(L)	炸篮尺寸(mm)
V7-TC-1	12	380	53 / 116	360×700×(850+90)	24L / 260×360×200mm	310×230×150

特点


- · 全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- · "V"形冷凉区沉积渣物,防粘于发热管上烧焦。
- ・温度自动控制调节范围50℃~190℃,230℃超温保护。
- · 发热管加热, 传热效率高。

- All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- "V" shaped cold area deposits slag to prevent it from sticking to the heating pipe and burning.
- Automatic temperature control, adjustment range 50 °C ~ 190 °C, 230 °C overtemperature protection.
- Heating tube heating, high heat transfer efficiency.



双缸双筛燃气炸炉连柜座 Gas 2-Tank Fryer (2-Basket) With Cabinet



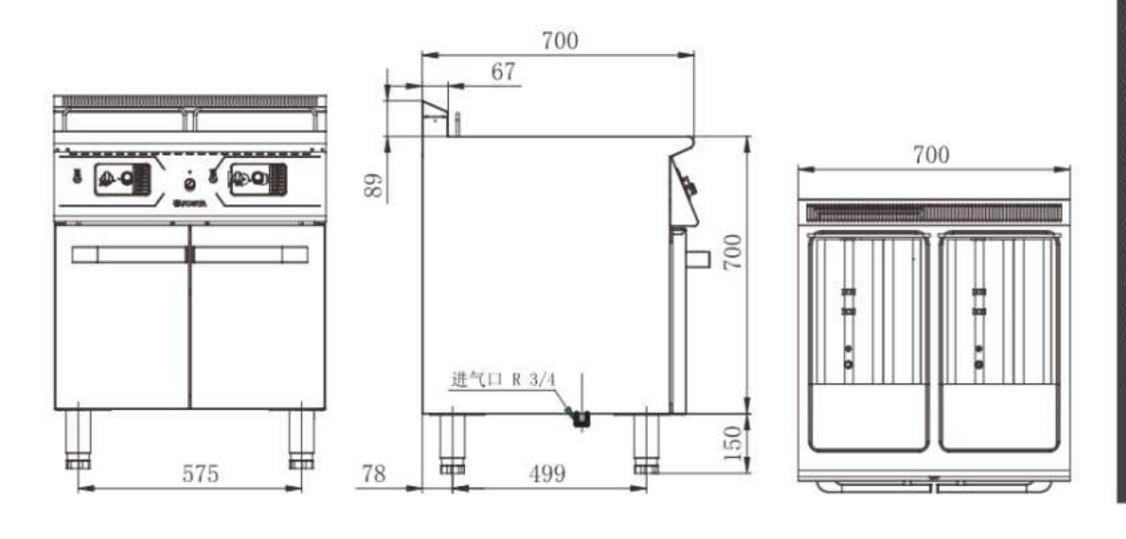

型号Model	功率Power(kw)	容量Capacity(L)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consi	umption
SZLT31-V7-RC-2 (天然气)	15 E v 2	20L×2	107 / 130	700×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZLY31-V7-RC-2 (液化气)	(A) (A)	油缸尺寸: 260×360×200mm		炸篮尺寸: 310×230×150mm	1.29x2	1.64x2

特点

- · 全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- ·升温速度快,油盆容积大。
- · 火管式加热传热效率高,可防止粘底及炉体温度过高。
- ·自动控温,使用集束热电偶,无电源。
- ·超温保护,确保安全230°C。
- · 放油阀设置自锁装置, 防止误操作。


Features

- · All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- · The heating speed is fast and the volume of the oil basin is large
- Fire tube heating has high heat transfer efficiency and can prevent sticking to the bottom and excessive furnace temperature.
- · Automatic temperature control, using cluster thermocouple, no power supply.
- Overtemperature protection to ensure safety 230 ° C.
- · The oil drain valve is equipped with self-locking device to prevent misoperation.

1

单缸单筛燃气炸炉连柜座 Gas 1-Tank Fryer(1-Basket) With Cabinet



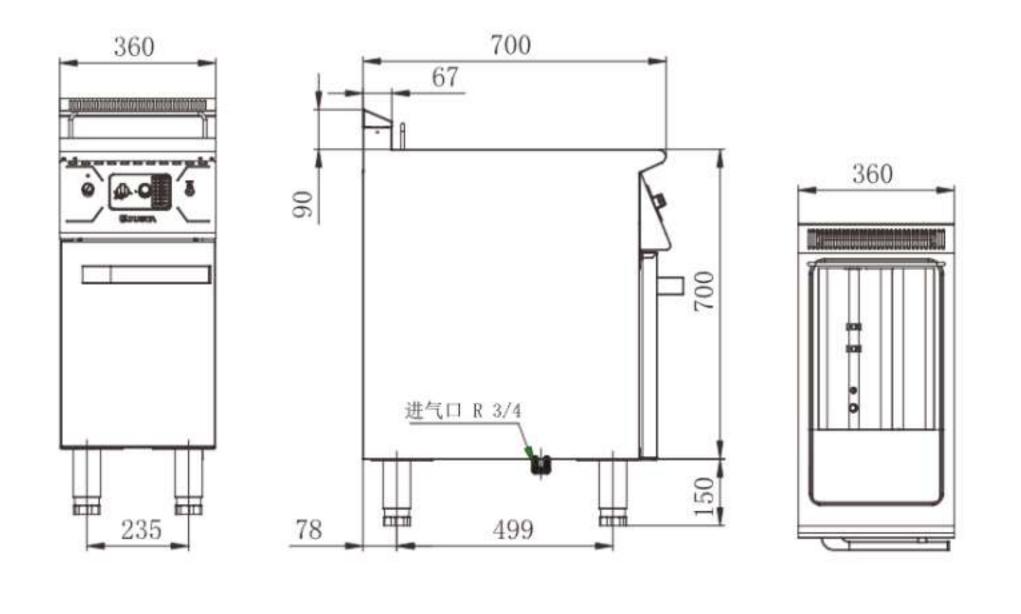

型号Model	功率Power(kw)	容量Capacity(L)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consi	umption
SZLT15-V7-RC-1 (天然气)	1E E	20L 油缸尺寸: 260×360×200mm	53 / 116	360×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZLY15-V7-RC-1 (液化气)	15.5		337110	炸篮尺寸: 310×230×150mm	1.29	1.64


特点

- · 全不锈钢机身结构。
- · 可调不锈钢脚, 放置平稳。
- ·升温速度快,油盆容积大。
- · 火管式加热传热效率高,可防止粘底及炉体温度过高。
- ·自动控温,使用集束热电偶,无电源。
- ·超温保护,确保安全230°C。
- · 放油阀设置自锁装置, 防止误操作。

- · All stainless steel body structure.
- · Adjustable stainless steel foot for stable placement.
- The heating speed is fast and the volume of the oil basin is large
- Fire tube heating has high heat transfer efficiency and can prevent sticking to the bottom and excessive furnace temperature.
- Automatic temperature control, using cluster thermocouple, no power supply.
- Overtemperature protection to ensure safety 230 ° C.
- The oil drain valve is equipped with self-locking device to prevent misoperation.

电煮面炉连柜座 Electric Noddle Boiler With Cabinet



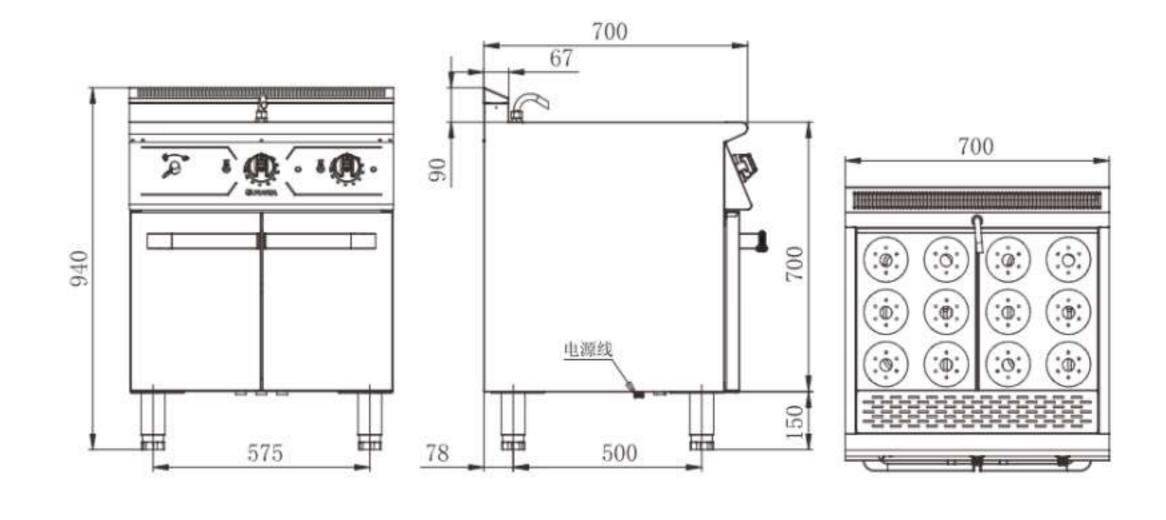

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TM-12	12	380	75 / 129	700×700×(850+90) 面篓尺寸: φ120mm×140mm

特点

- ·超强功率、瞬间升温,烹饪效率高,性价比高;保证设备安全及人员安全。
- ·全不锈钢外形设计,简洁美观,圆滑平整,无卫生死角, 易于清洗。
- ·双向进水、排水人性设计,操作简单、便捷。
- ·不锈钢可调脚人性设计,随意调节设备角度。
- · 独特喷流式设计, 人性、便捷。

Features

- With high power output, this product can heat up very soon. Such high cooking efficiency means high price—performance ratio. The safety of the equipment and users is also guaranteed.
- All stainless steel body with nice-looking. The smooth and flat surface ensures that it will not collect dirt and can be completely cleaned.
- The user-friendly design of two-way water inlet and outlet makes it convenient and easy to operate.

700

- With adjustable stainless steel feet, users can adjust the angle of the equipment as they want.
- The unique jet flow design is user-friendly and convenient.

电煮面炉连柜座 Electric Noddle Boiler With Cabinet



1		-	67	
	D	06		400
940				700 P
			进水口 R 3/4"	120
1	275	78	500	

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TM-6	6	380	38 / 65	400×700×(850+90) 面篓尺寸:φ120mm×140mm

特点


- ·超强功率、瞬间升温,烹饪效率高,性价比高;保证设备安全及人员安全。
- ·全不锈钢外形设计,简洁美观,圆滑平整,无卫生死角, 易于清洗。
- ·双向进水、排水人性设计,操作简单、便捷。
- ·不锈钢可调脚人性设计,随意调节设备角度。
- · 独特喷流式设计, 人性、便捷。

- With high power output, this product can heat up very soon. Such high cooking efficiency means high price—performance ratio. The safety of the equipment and users is also guaranteed.
- All stainless steel body with nice-looking. The smooth and flat surface ensures that it will not collect dirt and can be completely cleaned.
- The user-friendly design of two-way water inlet and outlet makes it convenient and easy to operate.
- With adjustable stainless steel feet, users can adjust the angle of the equipment as they want.
- · The unique jet flow design is user-friendly and convenient.



燃气煮面炉连柜座 Gas Noodle Boiler With Cabinet



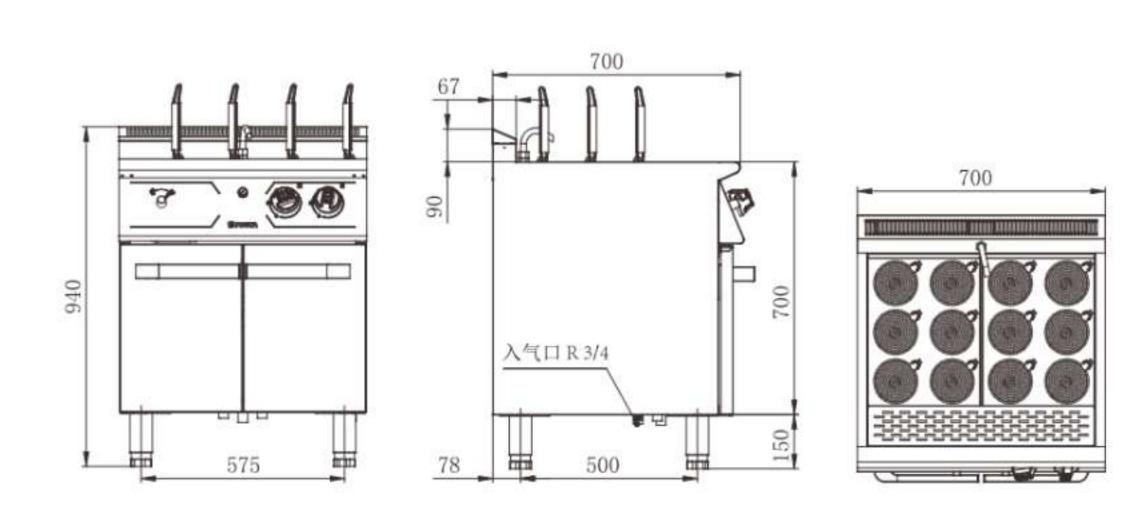

型号Model	热功率Power(kw)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Cons	umption
SZST22-V7-RM-12 (天然气)	22	02 / 127	700×700×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZSY22-V7-RM-12 (液化气)	22	83 / 137	面篓尺寸: φ120×140mm	1.82	2.32


- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- · 独特喷流式设计, 操作简单。

Features

- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.

燃气喷流式单缸煮面炉连柜座 Gas Pasta Cooker With Cabinet(1-Tank)



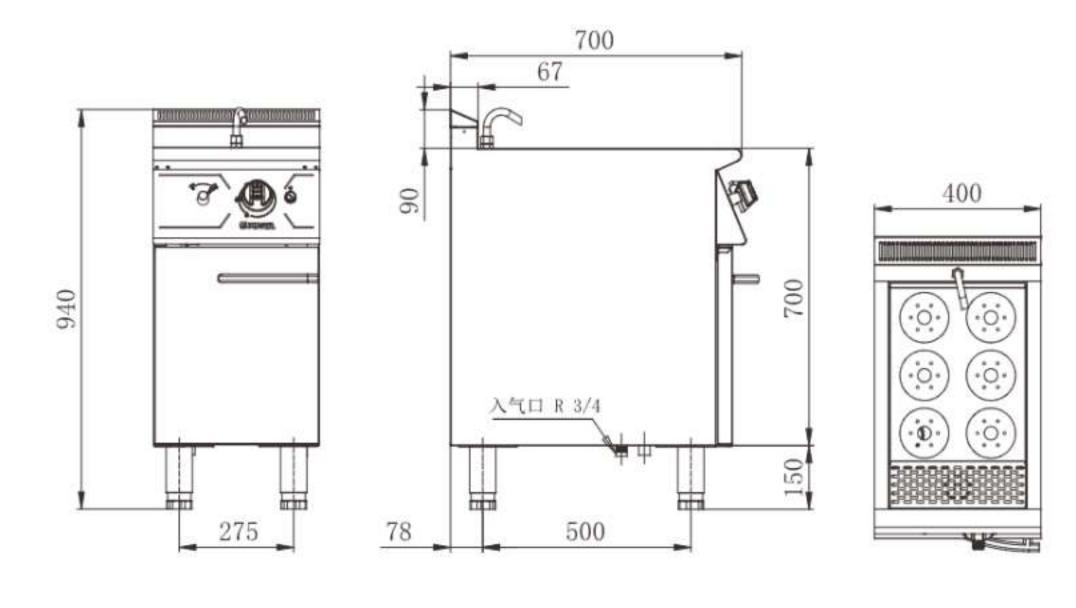

型号Model	热功率Power(kw)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas Consu	umption
SZST11-V7-RM-6 (天然气)	44	40 / 75	400×700×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZSY11-V7-RM-6 (液化气)		42 / 75	面篓尺寸: φ120×140mm	0.91	1.16

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- · 独特喷流式设计, 操作简单。

(Features)

- High power output, quick heating and high efficiency.
- All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.

燃气意粉炉连柜座 Gas Pasta Cooker With Cabinet



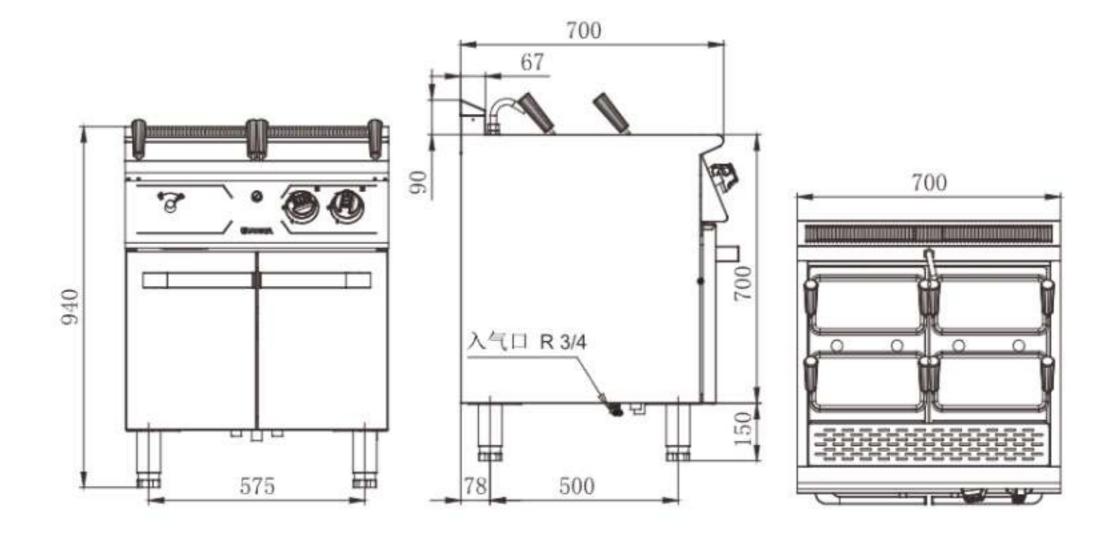

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consumption	
SZST22-V7-RM-S4 (天然气)	22.0		001100	700×700×(850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZSY22-V7-RM-S4 (液化气)	23.6		82 / 136	粉筐尺寸: 280x150×180mm	1.82	2.32

特点


- ·超强功率、瞬间升温,烹饪效率高,性价比高;独特防干烧设计,保证设备安全及人员安全。
- ·全不锈钢外形设计,简洁美观,圆滑平整,无卫生死角,易于清洗。
- ·双向进水、排水人性设计,操作简单、便捷。
- ·不锈钢可调脚人性设计,随意调节设备角度。
- · 独特喷流式设计, 人性、便捷。

Features

- With high power output, this product can heat up very soon. Such high cooking
 efficiency means high price—performance ratio. With the unique anti-dry heat
 design, the safety of the equipment and users is also guaranteed.
- All stainless steel body with nice-looking. The smooth and flat surface ensures that it will not collect dirt and can be completely cleaned.
- The user-friendly design of two-way water inlet and outlet makes it convenient and easy to operate.
- With adjustable stainless steel feet, users can adjust the angle of the equipment as they want.
- The unique jet flow design is user-friendly and convenient.

电意粉炉连柜座 Electric Pasta Cooker With Cabinet



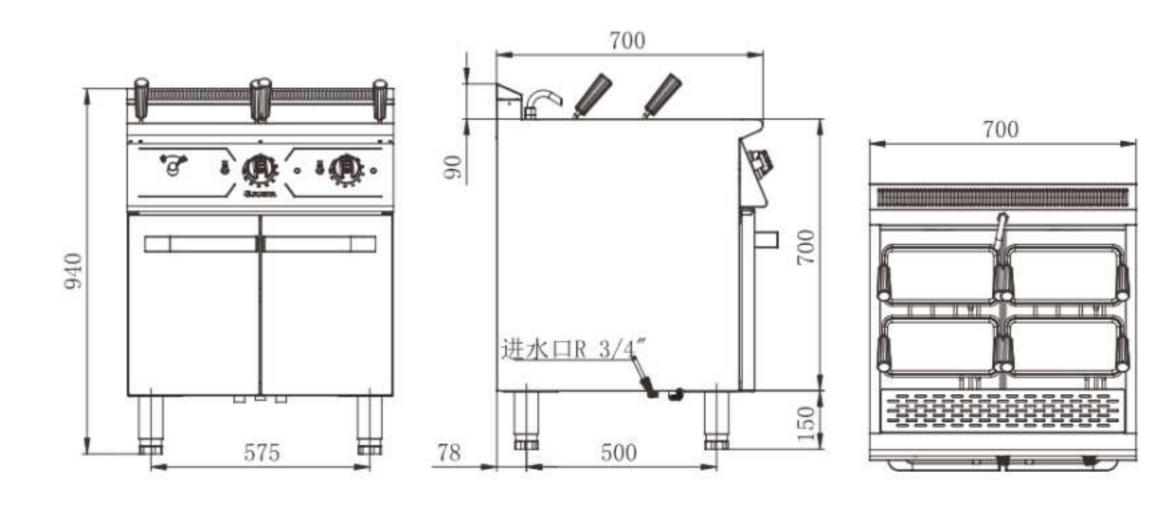

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	粉筐尺寸(mm)
V7-TM-S4	12	380	75 / 129	700×700×(850+90)	280×150×180mm


特点


- ·功率大,升温快,效率高。
- ·外形全不锈钢,简约美观,清洗方便,易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- · 独特喷流式设计,操作简单。


- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.

电意粉炉连柜座 Electric Pasta Cooker With Cabinet



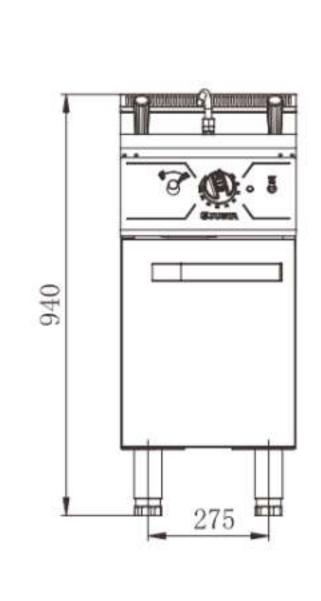

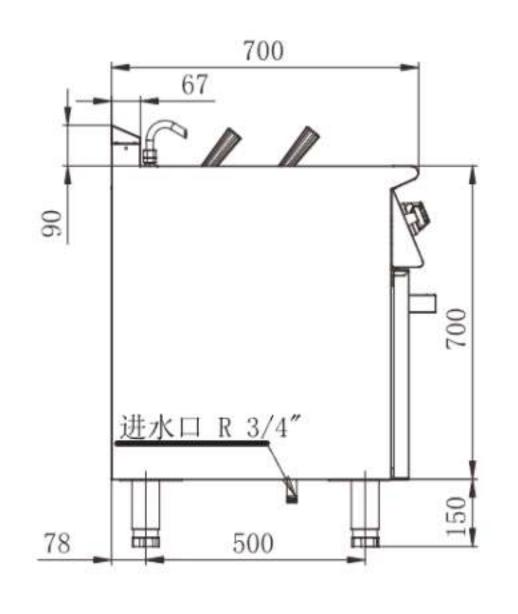

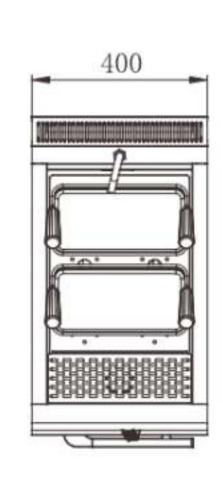

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)	粉筐尺寸(mm)
V7-TM-S2	6	380	38 / 63	400×700×(850+90)	280×150×180mm

特点

- ·功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- ·独特喷流式设计,操作简单。


Features

- · High power output, quick heating and high efficiency.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- · Unique electric jet flow design makes it easy to operate.

*

燃气1/3坑扒炉连柜座 Gas Griddle (2/3Flat&1/3Grooved) With Cabinet



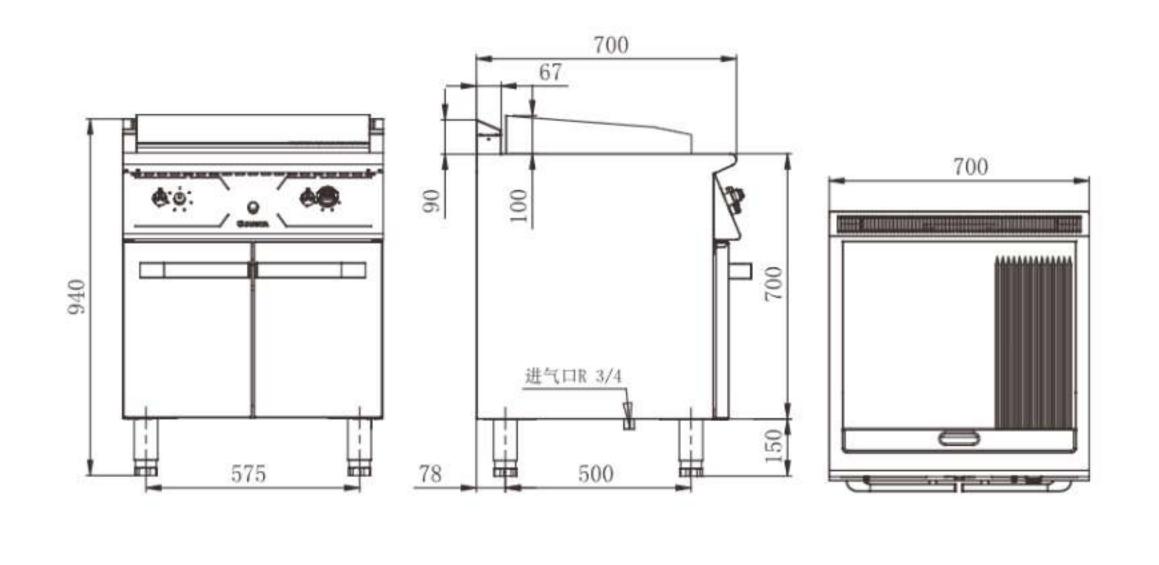

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SRBT11-V7-RG (天然气)	11.8	95 / 165	700×700×(850+90) 扒板尺寸/Griddle size: 625×496×20	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10-V7-RG (液化气)	5.8			0.88	1.25

特点


- ·功率大,升温快,效率高。
- · 外形全不锈钢,简约美观,清洗方便。
- · 镀铬扒板,减少热量分散。
- · 可调节炉脚。

- · High power output, quick heating and high efficiency.
- All Stainless steel body,nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- It is equipped with adjustable feet.



燃气1/3坑扒炉连焗炉 Gas Griddle (2/3Flat & 1/3 Grooved) With Gas Oven



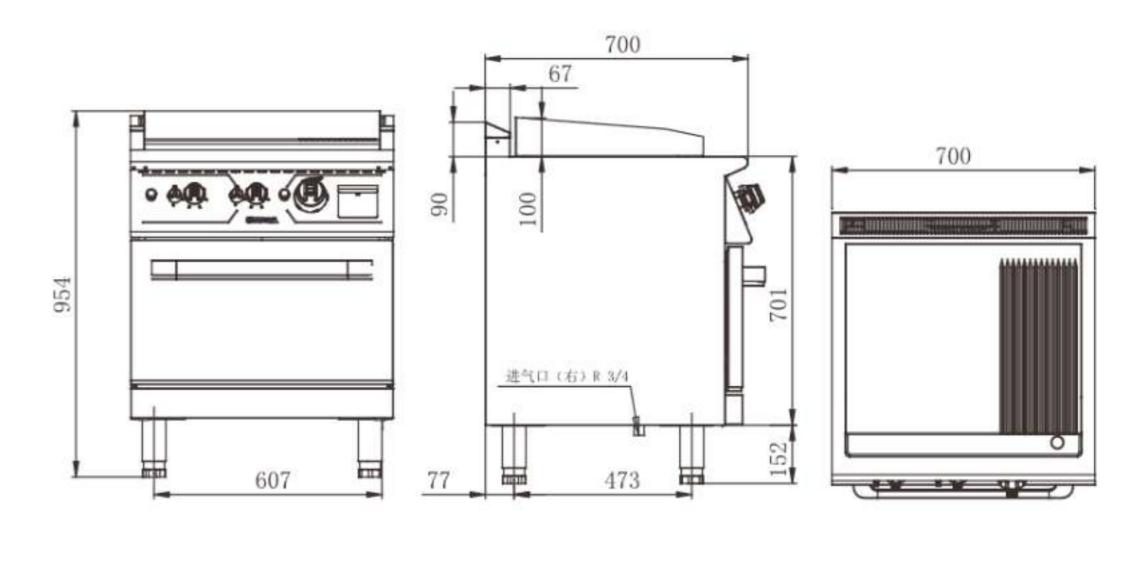

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	Consumption
SRBT11+KXT5.8-V7-RU (天然气)	11.8+5.8	148 / 185	700×700×(850+90) 扒板尺寸/Griddle size: 625×496×20 焗炉尺寸:560×600×270	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10+KXY5.8-V7-RU (液化气)	11.8+5.8			1.36	1.87

特点


- ·功率大,升温快,效率高。
- ·外形全不锈钢,简约美观,清洗方便。
- ·镀铬扒板,减少热量分散。
- ·可调节炉脚。

Features

- High power output, quick heating and high efficiency.
- · All Stainless steel body,nice-looking and easy to clean.
- · Chromed plate can help reduce heat loss.
- · It is equipped with adjustable feet.

电1/3坑扒炉连柜座 Electric Griddle(2/3 Flat &1/3 Grooved)With Cabinet



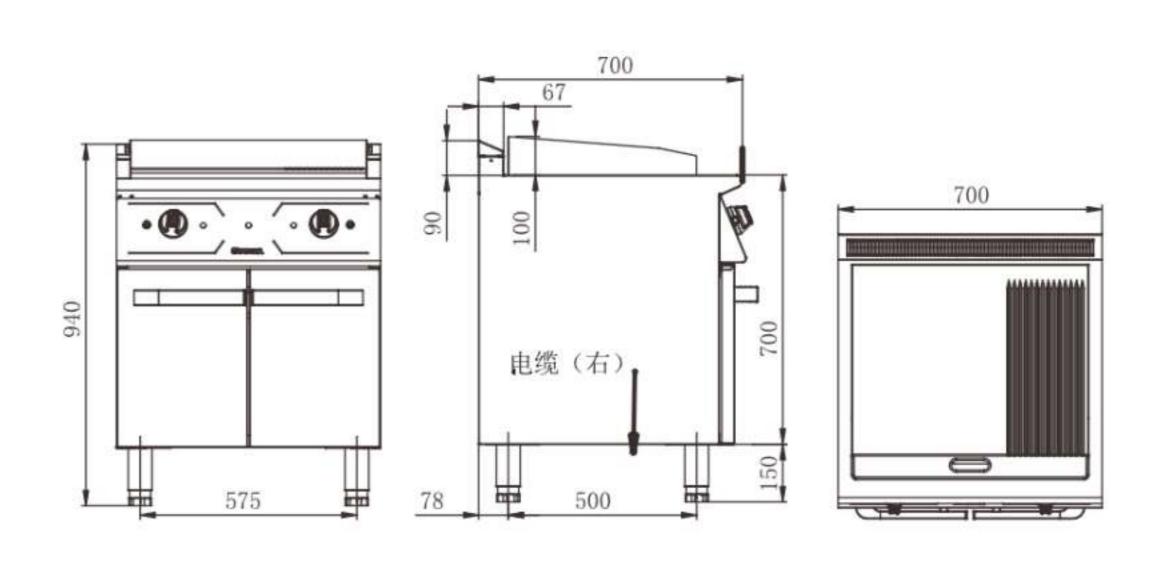

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TG	9	380	86 / 155	700×700×(850+90) 扒板尺寸/Griddle size: 625×496×20


特点

- 功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 镀铬扒板,减少热量分散。
- 可调节炉脚。

- High power output, quick heating and high efficiency.
- · All stainless steel body with nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- It is equipped with adjustable feet.

电全平扒炉连单门柜座 Electric Griddle With Cabinet



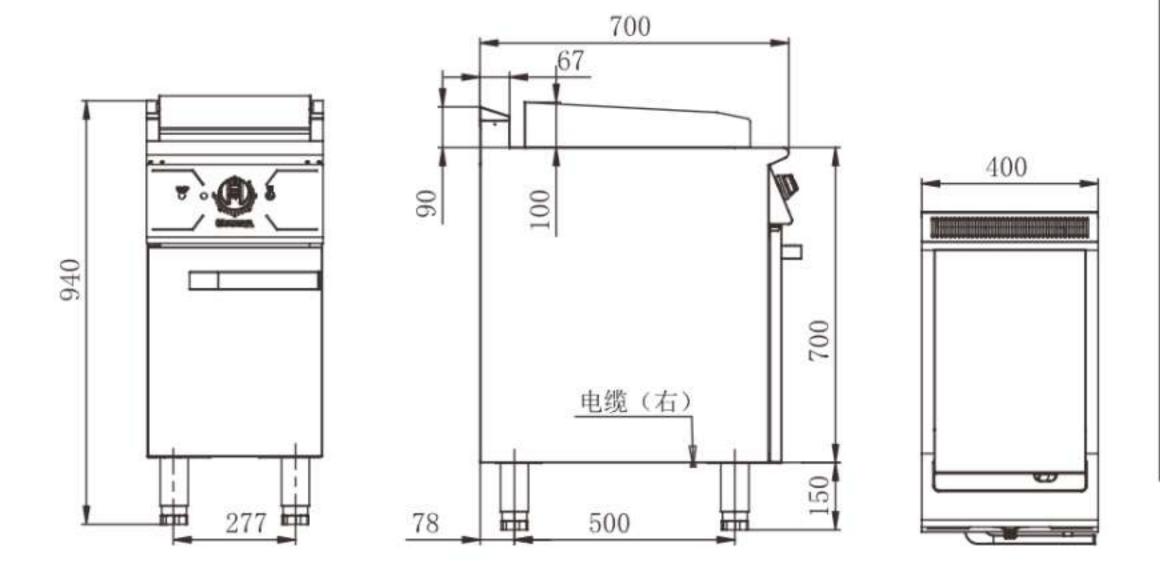

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TG400	4.5	380	45 / 85	400×700×(850+90) 扒板尺寸/Griddle size: 312×496×20

特点


- 功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 镀铬扒板,减少热量分散。
- 可调节炉脚。

Features

- High power output, quick heating and high efficiency.
- All stainless steel body with nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- It is equipped with adjustable feet.

电1/3坑扒炉连焗炉 Electric Griddle(2/3Flat & 1/3 Grooved)With Electric Oven



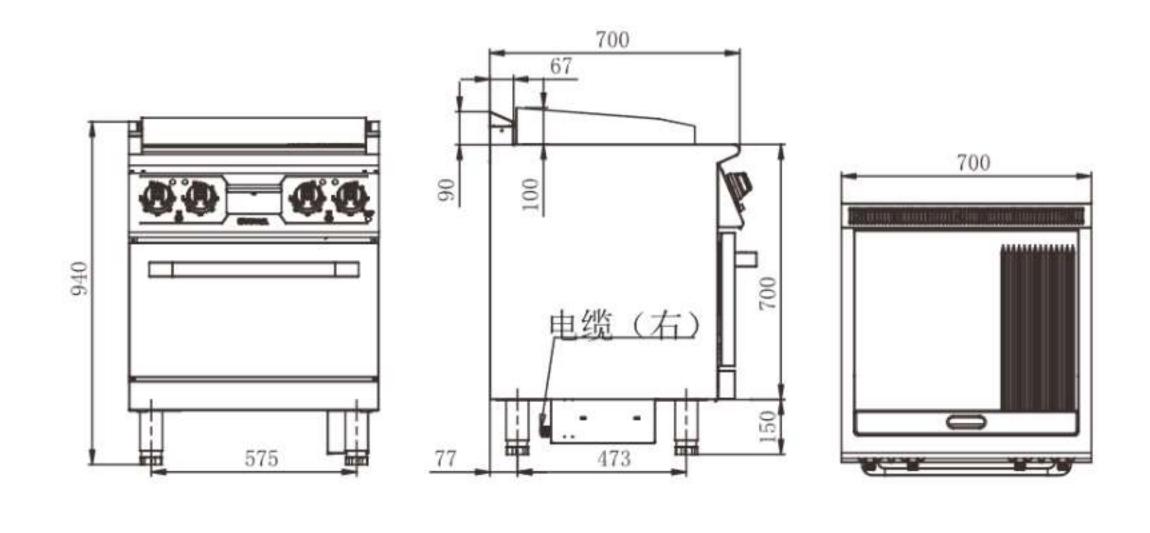

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TU	9+ (上1.8+下3)	380	140 / 185	700×700×(850+90) 扒板尺寸/Griddle plate size:625 × 496 × 20 焗炉尺寸/Oven Dimension:560 × 600 × 290

特点


- · 功率大,升温快,效率高。
- · 外形全不锈钢, 简约美观, 清洗方便。
- · 镀铬扒板,减少热量分散。
- 可调节炉脚。

- High power output, quick heating and high efficiency.
- · All Stainless steel body,nice-looking and easy to clean.
- Chromed plate can help reduce heat loss.
- It is equipped with adjustable feet.



西式炒炉 Gas Wok Range



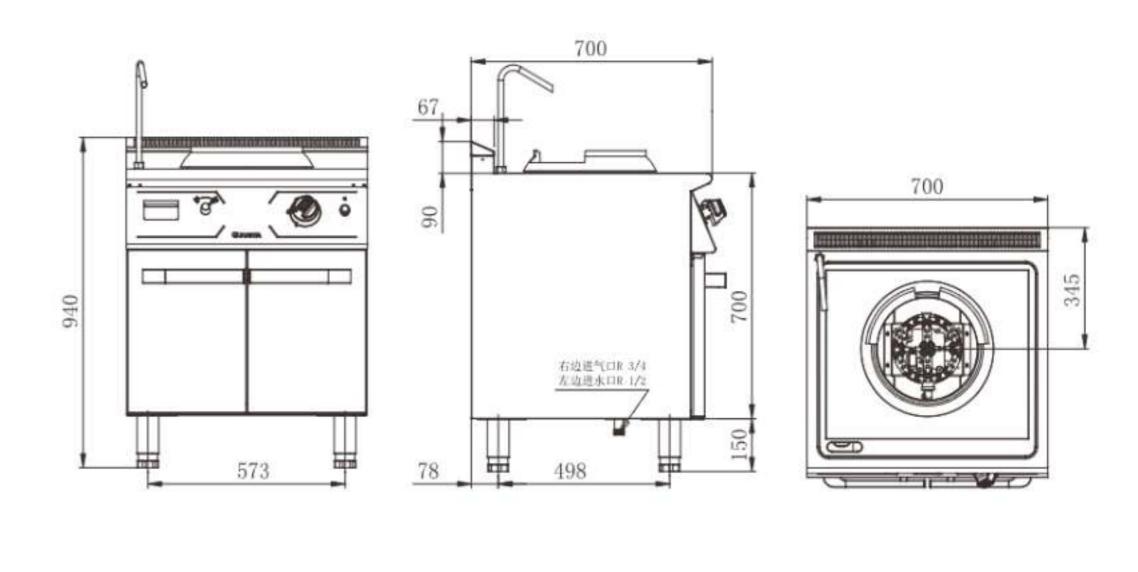

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consumption	
SZCT20-V7-CR (天然气)	20	122 / 174	700×700× (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SZCY20-V7-CR (液化气)	20		700.700.700.7	1.66	2.12

特点

- ·双层加厚设计:加厚板材、保证炉具的高强度和高韧性,经久耐用,不易变形。
- ·高效能炉头,效率高,性价比强;自有熄火保护装置,安全又放心。


Features

- Double-layer design of thickened plates ensures high stiffness and toughness of the cooker, making it durable and tenacious.
- It adopts high-efficiency burners ensuring high efficiency and price—performance ratio. The built-in flame failure protection device ensures safety.

/ 注

法式燃气热铁板炉连焗炉 Gas Solid Top With Gas Oven



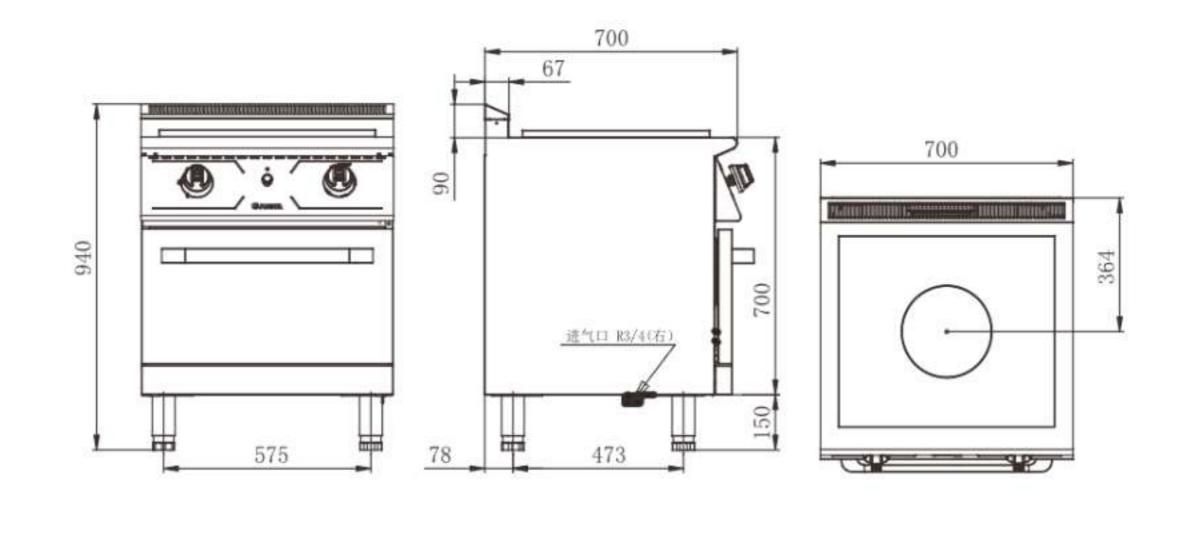

型号Model	功率Power(kw)	规格Dimensions(mm)	净重/毛重(KG)	耗气量Gas	Consumption
SRBT10+KXT5.8-V7-RT (天然气)	10±5.8	700×700×(850+90)	122 / 176	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10+KXY5.8-V7-RT (液化气)	10+5.8	焗炉尺寸/Oven Chamber Dimension:560×600×270	122 / 1/6	1.31	1.67


特点

- 功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 压铸铁板,带导热槽传热快。
- 可调节炉脚。

- · High power output, quick heating and high efficiency.
- All stainless steel body with nice-looking and easy to clean.
- It adopts die casting iron top with heat conducting grooves, which can conduct heat fast and keep food warm.
- · It is equipped with adjustable feet.

法式燃气热铁板炉连柜座 Gas Solip Top With Cabinet



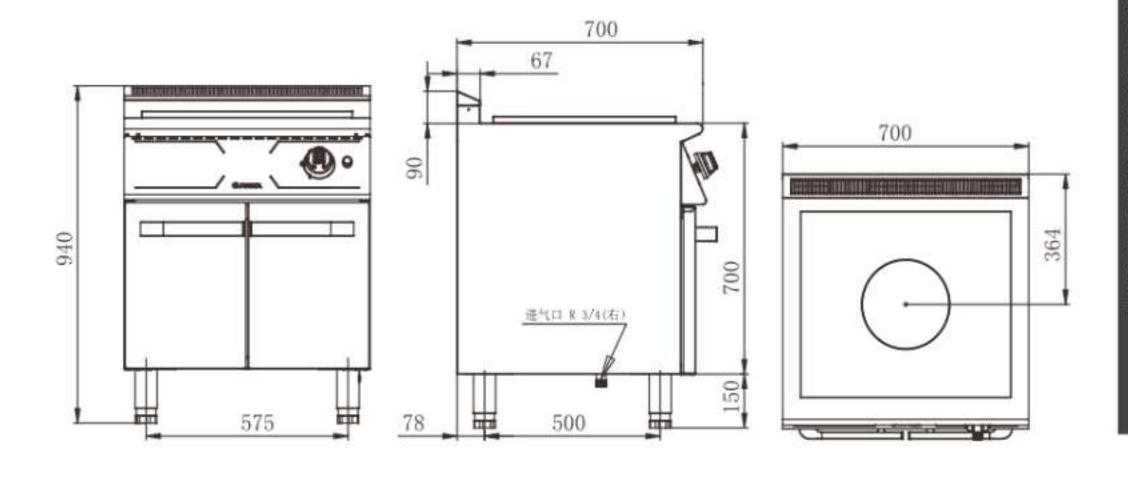

型号Model	功率Power(kw)	规格Dimensions(mm)	净重/毛重(KG)	耗气量Gas	Consumption
SRBT10-V7-RE (天然气)	10	700×700×(950±00)	87 / 141	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY10-V7-RE (液化气)	10	700×700×(850+90)	077141	0.83	1.06

特点


- 功率大,升温快,效率高。
- 外形全不锈钢, 简约美观, 清洗方便。
- 压铸铁板,带导热槽传热快。
- 可调节炉脚。

Features

- · High power output, quick heating and high efficiency.
- · All stainless steel body with nice-looking and easy to clean.
- It adopts die casting iron top with heat conducting grooves, which can conduct heat fast and keep food warm.
- It is equipped with adjustable feet.

电烧烤炉连柜座 Electric Radiant Grill With Cabinet



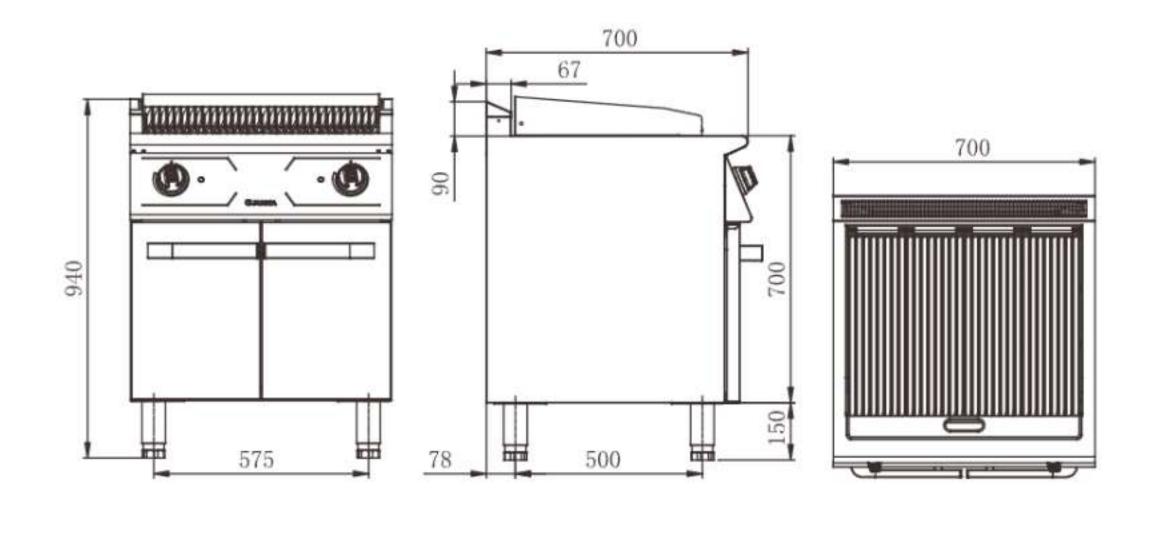

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-TH	9	380	95 / 175	700×700× (850+90) 烤网尺寸/Griddle size: 620x480x20mm

特点


- 功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 铸铁烤网保持热惯性。
- 可调节炉脚。

- · High power output, quick heating and high efficiency.
- All Stainless steel body, nice-looking and easy to clean.
- The cast iron grid can keep thermal inertia.
- It is equipped with adjustable feet.



燃气烧烤炉连柜座 Gas Lava Rock Grill With Cabinet



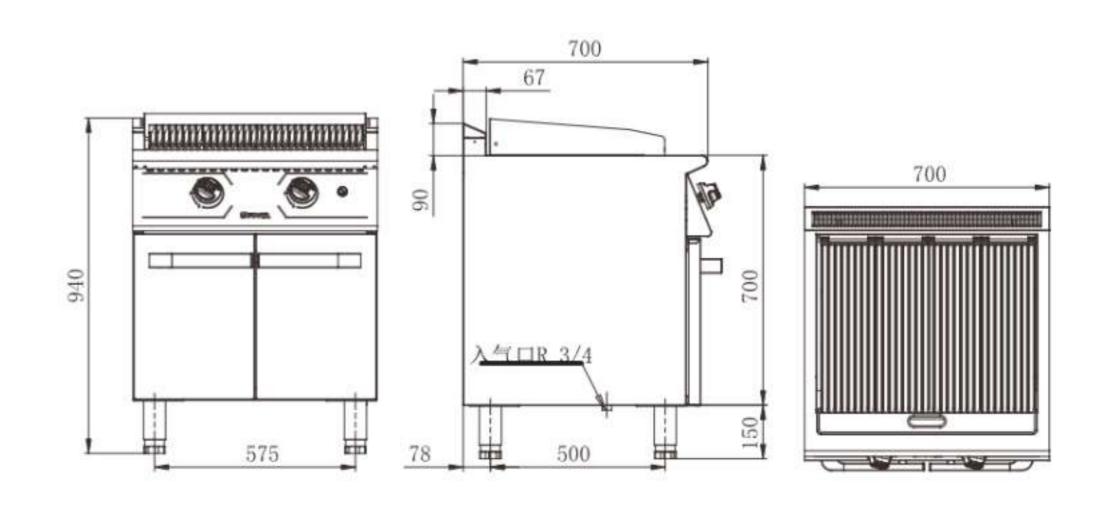

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas (Consumption
SSKT14-V7-RH (天然气)	115 / 102	700,,700,, (050,00)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)	
SSKY14-V7-RH (液化气)	14.4	115 / 193	700×700× (850+90)	1.2	1.52

特点


- 功率大,升温快,效率高。
- 外形全不锈钢,简约美观,清洗方便。
- 铸铁烤网保持热惯性。
- 可调节炉脚。

Features

- · High power output, quick heating and high efficiency.
- · All stainless steel body with nice-looking and easy to clean.
- The cast iron grid can keep thermal inertia.
- · It is equipped with adjustable feet.

燃气烧烤炉连柜座 Gas Lava Rock Grill With Cabinet



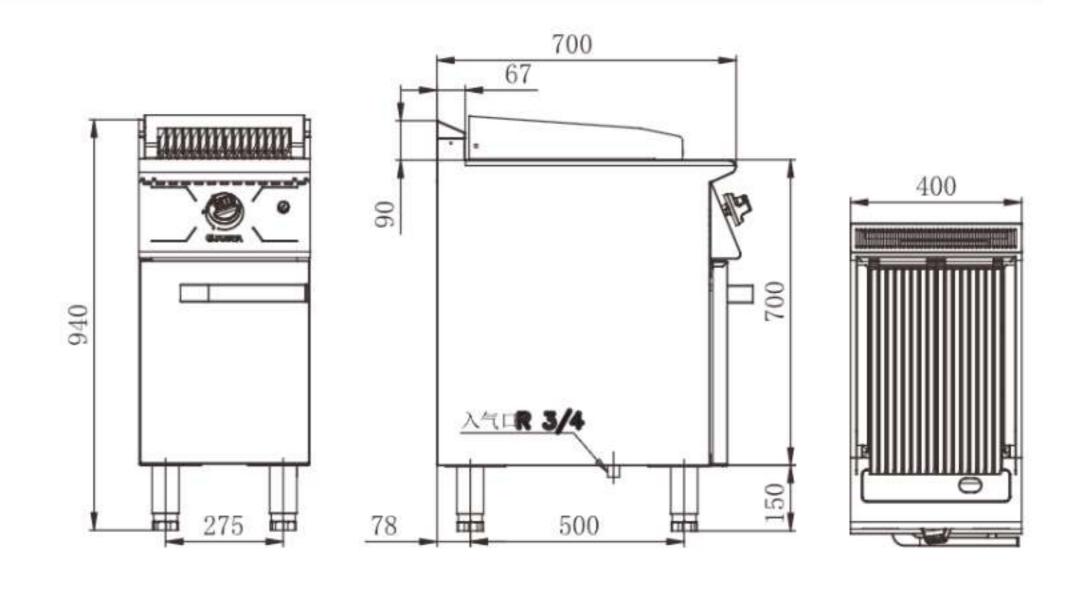

型号Model	功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas Consumption	
SSKT7.2-V7-RHA (天然气)	7.0	E2 / 92	400 700 (050:00)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SSKY7.2-V7-RHA (液化气)	7.2	53 / 83	400×700× (850+90)	0.6	0.76


特点

- 功率大,升温快,效率高。
- 外形全不锈钢, 简约美观, 清洗方便。
- 铸铁烤网保持热惯性。
- 可调节炉脚。

- · High power output, quick heating and high efficiency.
- All stainless steel body with nice-looking and easy to clean.
- The cast iron grid can keep thermal inertia.
- It is equipped with adjustable feet.

可倾斜式电炒锅 Electric Tilting Braising Pan



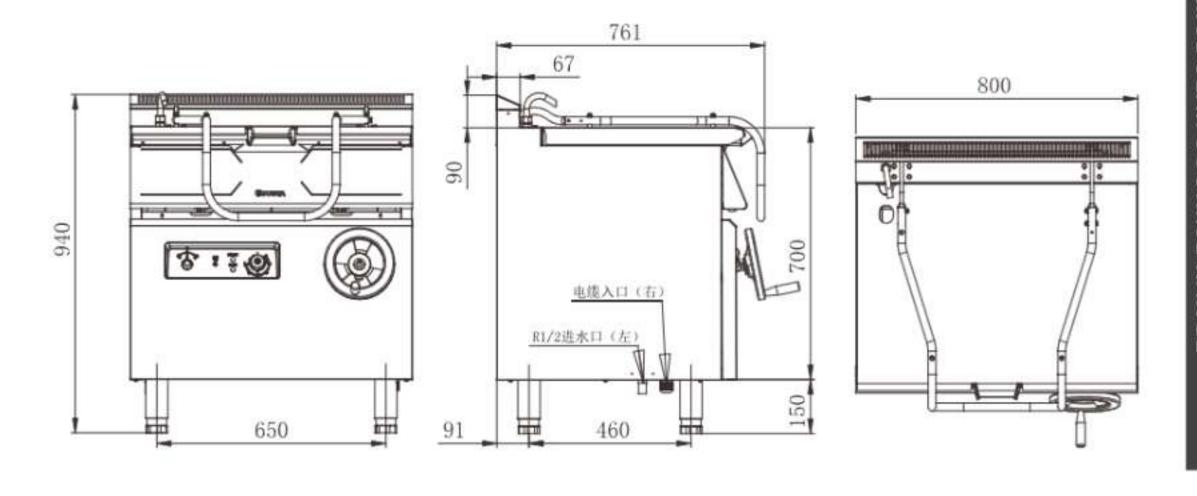

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	容量Capacity(L)	规格Dimensions(mm)
V7-TS	9	380	95 / 150	60	800×700× (850+90)

特点


- ·一炉多用,煎、炒、扒、煮样样精通,性价比高。
- · 外壳使用304材质, 铸铁烟道装饰条。
- ·锅体采用304不锈钢材质,锅底采用复合不锈钢材料,保证锅的耐腐蚀性及热传导的均衡。
- ·可倾式锅体设计,最大限度地方便用户转移锅内食品。
- ・自动控温设置,温控范围50~300℃可调。
- ·超温保护功能,最高限温340℃,确保使用安全。
- ·锅体可倾提升翻转功能,手动升降可精确控制。
- ·易于清洁的锅底圆弧设计,最大限度的避免卫生死角,便于清理锅内残渣。
- ·设备自带水喉注水功能。

Features

- This product is multifuntional and can be used for frying, stir frying, cooking steak and braising, which means that it has extremely high price—performance ratio.
- . The body is made of 304 stainless steel and decorated with cast iron flue trims.
- The pan is made of 304 stainless steel with a bottom made of stainless steel plate to ensure the corrosion resistance of the pan and even heat conduction.
- It adopts titling pan design to help users remove the food inside the pan.
- Automatic temperature setting with a temperature range of 50-300°C.
- Equipped with safety thermostats, the cooker's maximum temperature is 340°C to ensure safety.
- The pan can be lifted and turned upside down. Lifting the pan annually can accurately control
 the lifting height.
- The bottom of the pan adopts curved design to make sure it can be completely cleaned and make it easy to clean the residues in the pan.
- · The equipment is equipped with taps for flushing.

可倾斜式燃气炒锅 Gas Tilting Braising Pan



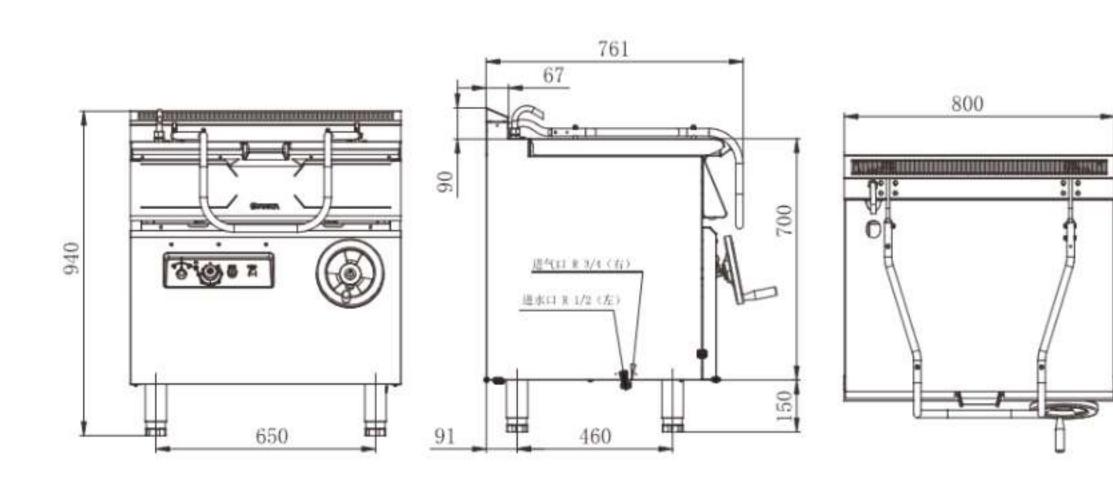

型号Model	功率 Power(kw)	容量Capacity(L)	净重/毛重 (KG)	规格Dimensions(mm)	耗气量Gas C	onsumption
SDGT18-V7-RS (天然气)	18	60	122 / 182	800×700× (850+90)	液化气LPG 2800-3700Pa(kg/h)	天然气NG 2000-2500Pa(m³/h)
SDGY18-V7-RS (液化气)					1.75	2.22


特点

- 一炉多用煎、炒、扒、煮样样精通,性价比高。
- 外壳使用304材质,铸铁烟道装饰条。
- 锅体采用304不锈钢材质,锅底采用316厚10mm不锈钢材料,保证锅的耐腐蚀性及热传导的均衡。
- 可倾式锅体设计,最大限度地方便用户转移锅内食品。
- 自动控温设置,温控范围50~300℃可调。
- 超温保护功能,最高限温340℃,确保使用安全.
- 锅体可倾提升翻转功能,手动升降可精确控制提升高度,锅起断电装置。
- 易于清洁的锅底圆弧设计,最大限度的避免卫生死角。
- 便于清理锅内残渣。
- 高效能铸铁储能板,防止热能过早流失,提高热效率,保障锅底部的热均匀性。
- · 6寸不锈钢可调脚,可调范围正负25mm可调。

- This product is multifuntional and can be used for frying, stir frying, cooking steak and braising, which means that it has extremely high price, performance ratio.
- has extremely high price—performance ratio.
 The housing is made of 304 stainless steel and decorated with cast iron flue trims.
- The pan is made of 304 stainless steel with a bottom made of 10mm thick 316 stainless steel plate to ensure the corrosion resistance of the pan and even heat conduction.
- It adopts titling pan design to help users remove the food inside the pan.
- Automatic temperature setting with a temperature range of 50-300°C.
- Equipped with safety thermostats, the cooker's maximum temperature is 340°C to ensure safety.
- The pan can be lifted and turned upside down. Lifting the pan annually can accurately control the lifting height. A
 device is adopted to cut off power supply when the pan is removed.
- The bottom of the pan adopts curved design to make sure it can be completely cleaned.
- It is easy to clean the residues in the pan.
- It adopts high-efficiency iron energy-storage boards to avoid early loss of heat and improve heat efficiency, thus
 ensuring even heat on the bottom of the cooker.
- The 20cm stainless steel feet can be adjusted; adjustable range: plus or minus 25cm.

燃气保温炉连柜座 Gas Bain Marie With Cabinet



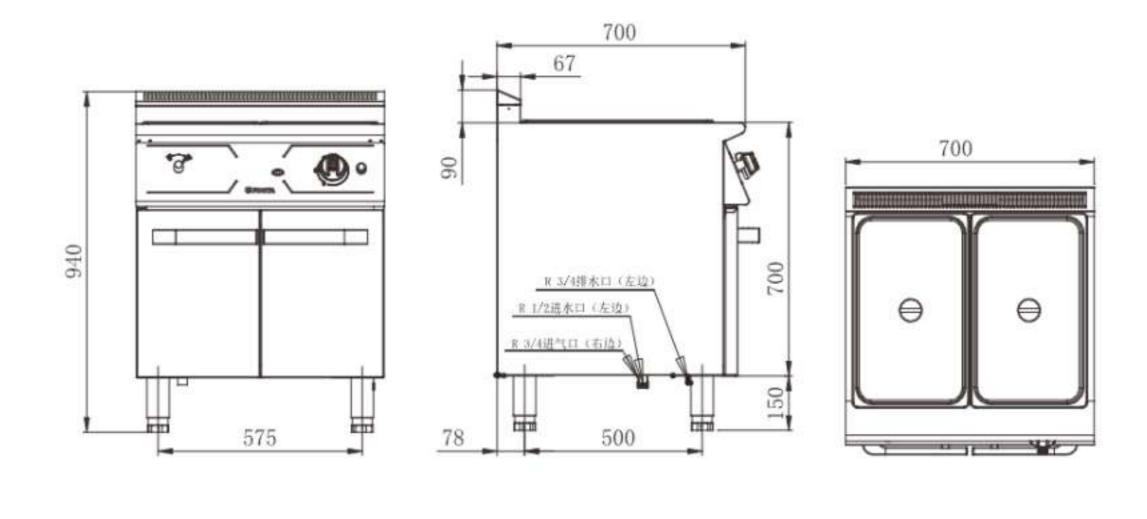

型号Model	热功率Power(kw)	净重/毛重(KG)	规格Dimensions(mm)	耗气量Gas	s Consumption
SRBT5.2-V7-RB (天然气)	6	77 / 131	700 × 700 × (850+90)	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
SRBY5.2-V7-RB (液化气)		777101	份盘尺寸: 640x510x160	0.43	0.55

特点


- · 功率大,升温快,效率高,防干烧。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ·双向进水、排水人性设计,操作简单、便捷。
- ·不锈钢可调节炉脚,随意调节设备角度。

Features

- · High power output, quick heating, high efficiency and anti-dry heating.
- · All Stainless steel body,nice-looking and easy to clean.
- The user-friendly design of two-way water inlet and outlet makes it convenient and easy to operate.
- With adjustable stainless steel feet, users can adjust the angle of the equipment as they want.

电保温炉连柜座 Electric Bain Marie With Cabinet



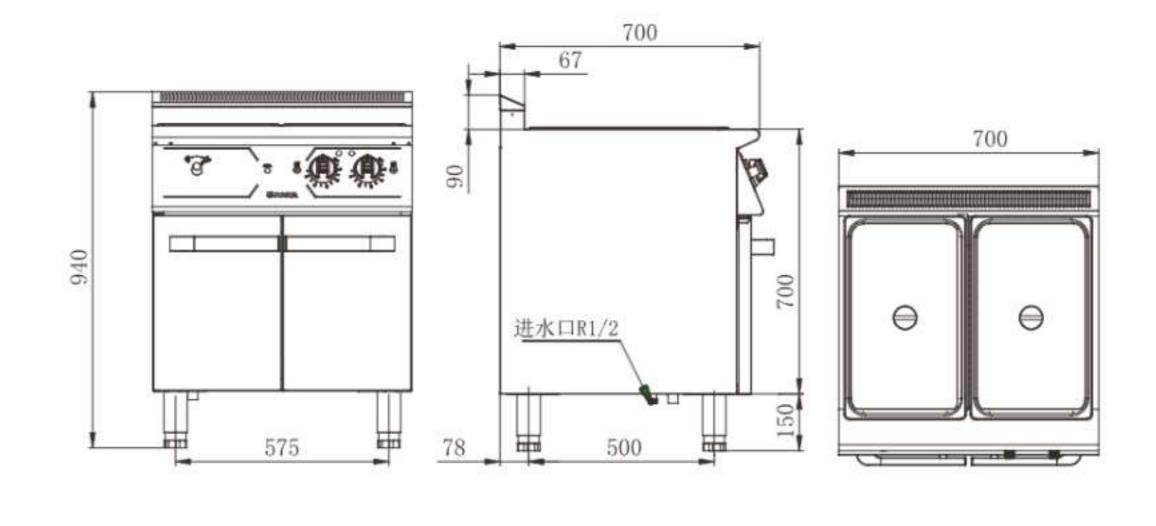

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	容量Capacity(L)	规格Dimensions(mm)
V7-TB	5	380	77 / 131		700×700× (850+90) 份盘尺寸: 640×510×160


特点


- 功率大,升温快,效率高,防干烧。
- 外形全不锈钢,简约美观,清洗方便,易保洁。
- 进水、排水方便快捷。
- 可调节炉脚。


- · High power output, quick heating, high efficiency and anti-dry heating.
- All stainless steel body with nice-looking and easy to clean.
- Water can be easily poured in and drained.
- · It is equipped with adjustable feet.

电保温炉连柜座 Electric Bain Marie With Cabinet



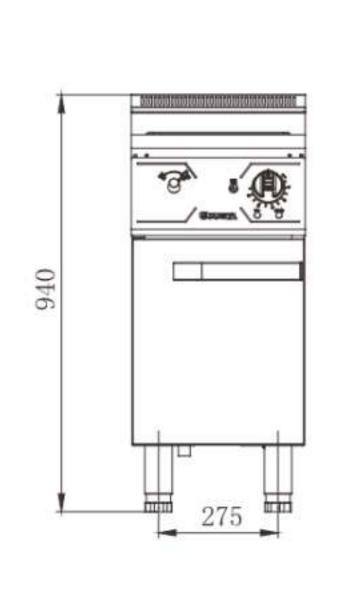

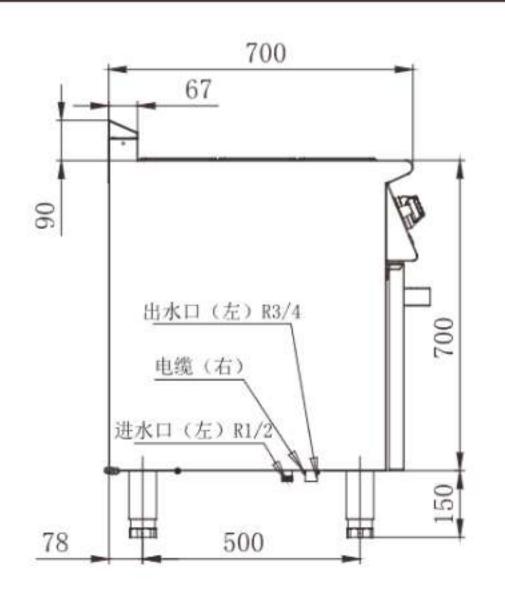

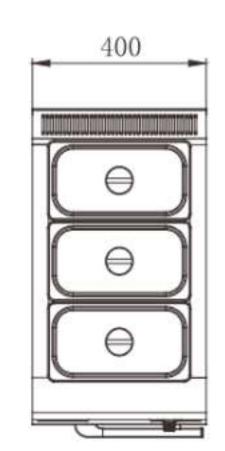

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	容量Capacity	规格Dimensions(mm)
V7-TB400	2.5	380	35 / 65	份盘尺寸 (1/3) 325×180×160	400×700× (850+90)

特点


- 功率大,升温快,效率高,防干烧。
- 外形全不锈钢,简约美观,清洗方便,易保洁。
- 进水、排水方便快捷。
- 可调节炉脚。


Features


- · High power output, quick heating, high efficiency and anti-dry heating.
- · All stainless steel body with nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- It is equipped with adjustable feet.

燃气夹层汤锅 Gas Jacketed Boiling Pan



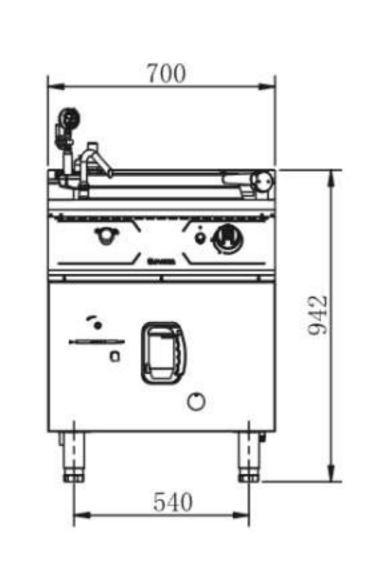

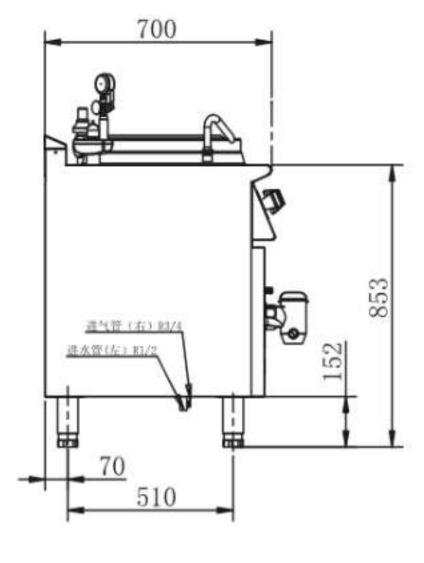

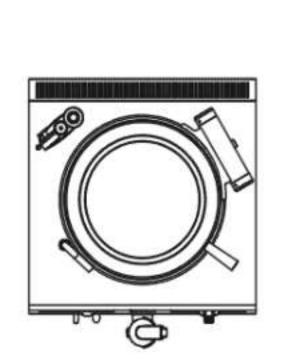

型号Model	功率 Power(kw)	压力(kPa) Rassure	容量(L) Capacity	规格Dimensions(mm)	净重/毛重(KG)	耗气量Gas	s Consumption
SDGT16-V7-RO (天然气) SDGY16-V7-RO	16	≤50	60	700×700x(850+90)	115 / 169	液化气LPG 2800Pa(kg/h)	天然气NG 2000Pa(m³/h)
(液化气)				汤锅直径: φ 420		1.33	1.69


特点

- ·功率大,升温快,高效节能,高压加热,安全可靠。
- · 外形全不锈钢, 简约美观, 清洗方便, 易保洁。
- ·汤桶内置过滤网,操作简单。
- ·进水、排水方便快捷。
- ・可调节炉脚。

- With high power output, this product can heat up fast and ensures high efficiency and energy conservation. High pressure heating makes it safe and reliable.
- All stainless steel body with nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.

电夹层汤锅 Electric Jacketed Boiling Pan



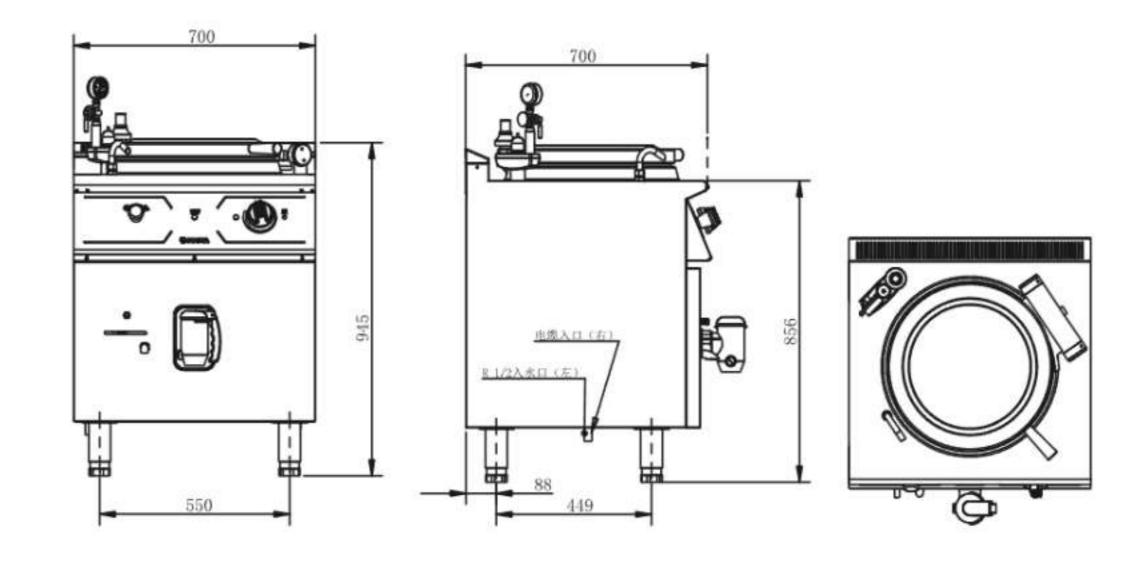

型号Model	功率 Power(kw)	压力(kPa) Pressure	容量Capacity(L)	电压Volts (V)	净重/毛重 (KG)	规格Dimensions(mm)
V7-TO	12	≤50	60	380	88 / 142	700×700×(850+90) 汤锅直径: φ 420

特点


- ·功率大,升温快,高效节能,高压加热,安全可靠,防干烧。
- · 外形全不锈钢,简约美观,清洗方便,易保洁。
- ・进水、排水方便快捷。
- ·可调节炉脚。
- ·汤桶内置过滤网,操作简单。

Features

- With high power output, this product can heat up fast and ensures high efficiency and energy conservation. High pressure heating makes it safe and reliable. Dry heating could be avoided.
- · All Stainless steel body, nice-looking and easy to clean.
- · Water can be easily poured in and drained.
- · It is equipped with adjustable feet.
- The cooking pot has strainer inside it, which makes it easy to operate.

电四头光波炉连焗炉 Electric 4 Ceramic Hob With Electric Oven



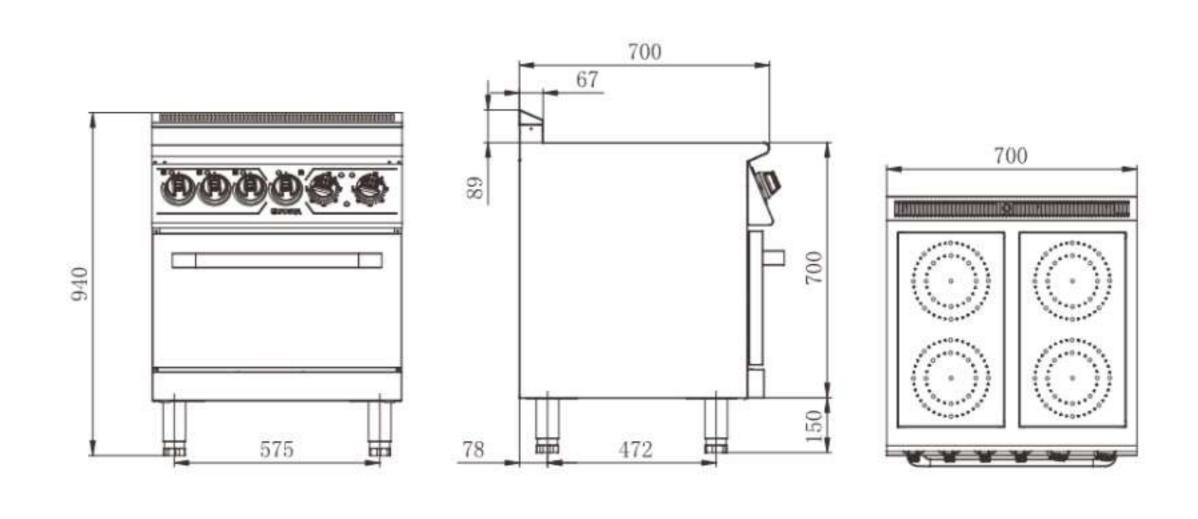

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-HP-4	7.2 + (上1.8+下3)	380	95 / 165	700×700×(850+90) 内膛尺寸Internal Dimension:560x600x270


特点

- ·全不锈钢外形设计,简洁美观,圆滑平整,无卫生死角, 易于清洁。
- · 关键元件由国际著名厂家供应。
- ·不锈钢可调脚,人性设计。

- All stainless steel body with nice-looking. The smooth and flat surface ensures that it will not collect dirt and can be completelay cleaned.
- Key components are supplied by world-renowned manufacturers.
- · The stainless steel feet are adjustable and user-friendly.

电光波炉连柜座 Electric Ceramic Hob With Cabinet



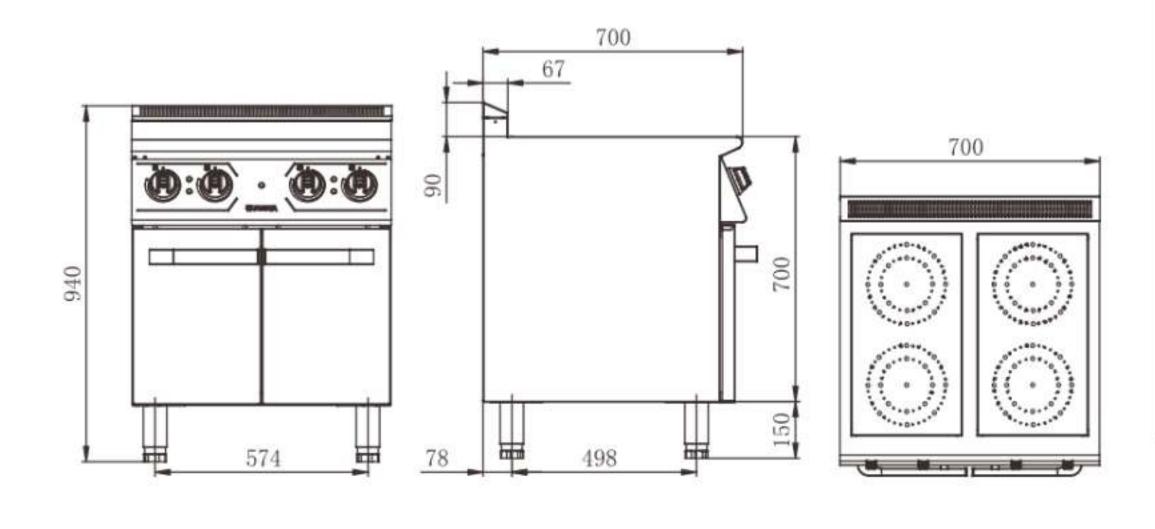

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-HQ-4	1.8x4	380	66 / 112	700×700× (850+90)

特点


- ·全不锈钢外形设计,简洁美观,圆滑平整,无卫生死角, 易于清洁。
- · 关键元件由国际著名厂家供应。
- ·不锈钢可调脚,人性设计。

[Features]

- All stainless steel body with nice-looking. The smooth and flat surface ensures that it will not collect dirt and can be completelay cleaned.
- Key components are supplied by world-renowned manufacturers.
- · The stainless steel feet are adjustable and user-friendly.

电光波炉连柜座 Electric Ceramic Hob With Cabinet



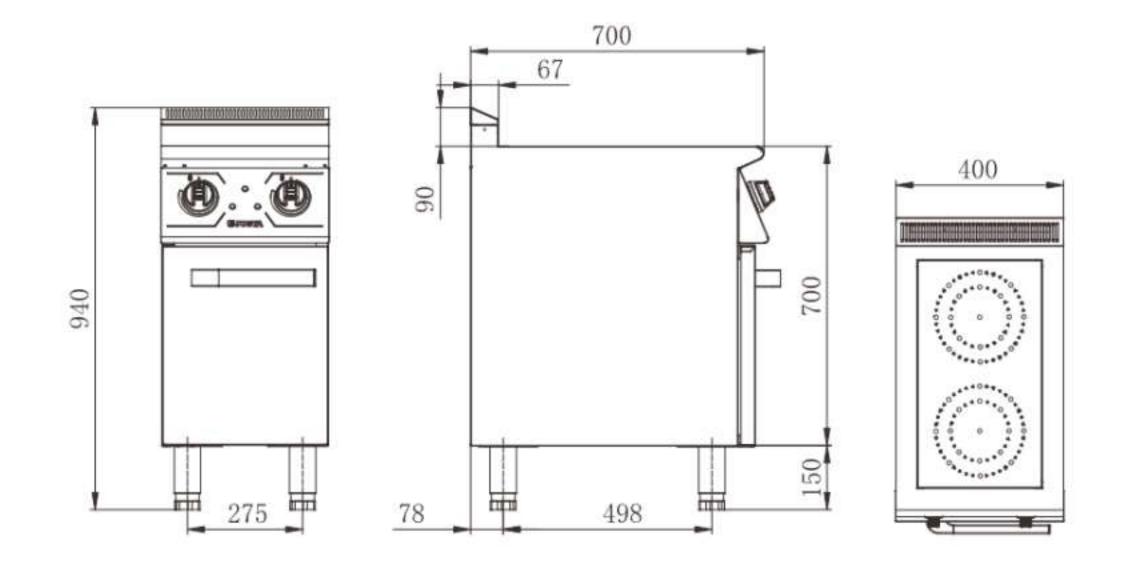

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-HQ-2	1.8x2	380	35 / 65	400×700× (850+90)

特点


- ·全不锈钢外形设计,简洁美观,圆滑平整,无卫生死角, 易于清洁。
- · 关键元件由国际著名厂家供应。
- ·不锈钢可调脚,人性设计。

- All stainless steel body with nice-looking. The smooth and flat surface ensures that it will not collect dirt and can be completelay cleaned.
- · Key components are supplied by world-renowned manufacturers.
- The stainless steel feet are adjustable and user-friendly.



电磁炉连柜座 Hot Plate With Cabinet



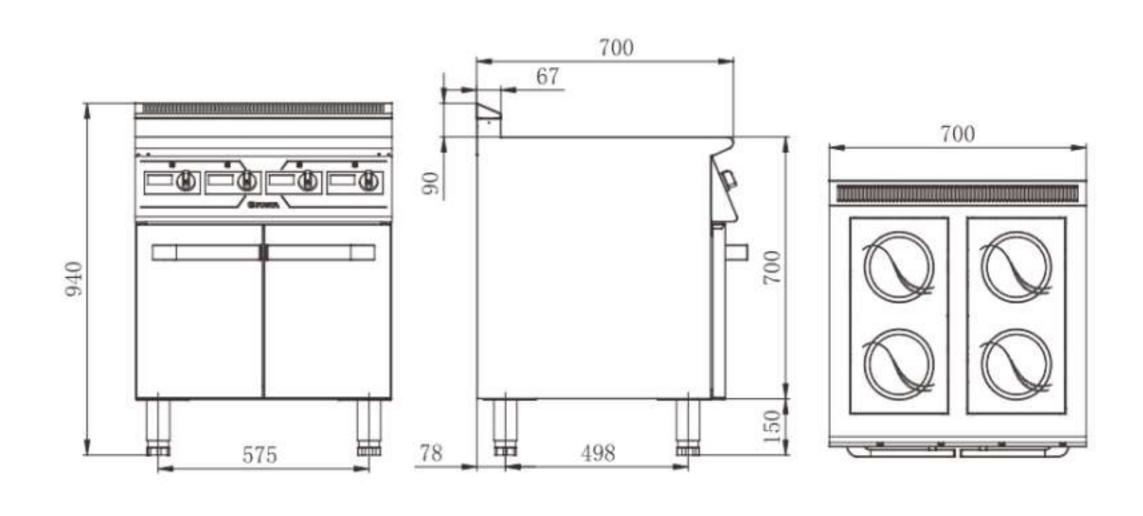

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-IC-4	14	380	75 / 112	700×700×(850+90)

特点


- 面板一体拉伸成型,无缝焊接,便于清洁。
- · 独立4个烹饪区,每个3.5KW,8档调节。
- 高强度耐磨微晶板, 防刮耐磨。
- 高效散热,8道大范围散热口,有效提升散热能力。
- · 采用技术领先的德国 "Infineon" IGBT模块, 性能稳定。
- 国家专利线盘,无盲区,火力更均匀。


[Features]


- Countertop plate with one stretch forming and seamless welding, easy for cleaning.
- 4 separate cooking burners and each one is 5KW/(3.5KW), 8 different selections.
- High strength and wear-resisting microcrystalline plate, it is anti-scraping and wear-resisting.
- 8 pcs wide range of heat dissipation with high efficiency, effectively improves heat dissipation capacity.
- Adopt advanced "Infineon" IGBT module from Germany with stable performance
- · National patent wire coil, without blind area and with more even firepower.

电磁炉连柜座 Hot Plate With Cabinet



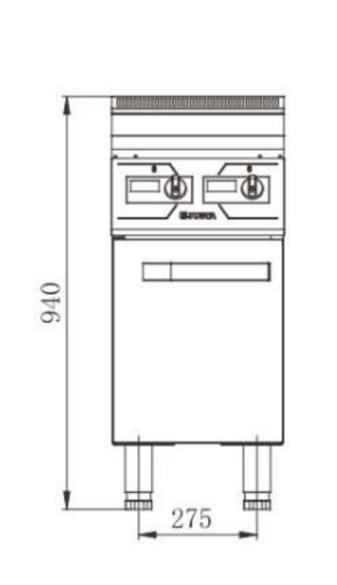

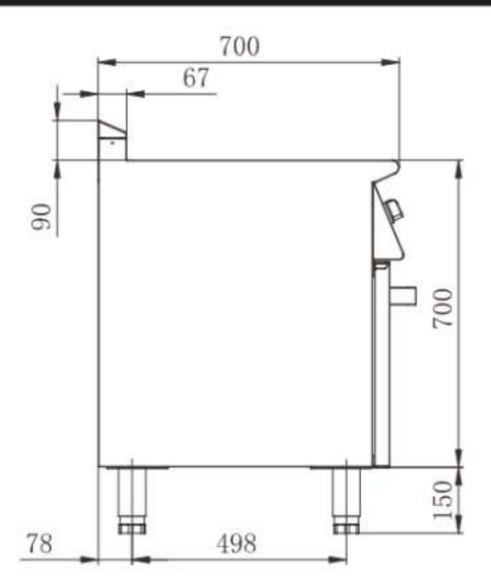

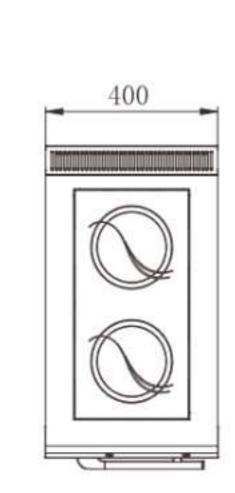

型号Model	功率Power(kw)	电压Volts (V)	净重/毛重(KG)	规格Dimensions(mm)
V7-IC-2	7	380	42 / 72	400×700×(850+90)

特点

- 面板一体拉伸成型,无缝焊接,便于清洁。
- · 独立4个烹饪区,每个3.5KW,8档调节。
- 高强度耐磨微晶板, 防刮耐磨。
- 高效散热,8道大范围散热口,有效提升散热能力。
- · 采用技术领先的德国 "Infineon" IGBT模块, 性能稳定。
- 国家专利线盘,无盲区,火力更均匀。

- Countertop plate with one stretch forming and seamless welding, easy for cleaning.
- 4 separate cooking burners and each one is 5KW/(3.5KW), 8 different selections.
- High strength and wear-resisting microcrystalline plate, it is anti-scraping and wear-resisting.
- 8 pcs wide range of heat dissipation with high efficiency, effectively improves heat dissipation capacity.
- Adopt advanced "Infineon" IGBT module from Germany with stable performance
- · National patent wire coil, without blind area and with more even firepower.

工作台连柜座 Neutral Working Table With Cabinet



备注:

1050mm长产品外包装尺寸:1250×810×1000mm 700mm长产品外包装尺寸:810×830×1000mm 400mm长产品外包装尺寸:500×830×1000mm





PT MULTI FLASHINDO KARISMA

□ JAKARTA Jl. Hayam Wuruk 114 Blok A No.4, Maphar. Jakarta - Indonesia 11160 Phone: +62 21 626 8758 Whatsapp: +62 811 1210 6803

☐ SURABAYA

Ruko Royal Crown Palace RA 2 Jl. H. Anwar Hamzah, Kp. Baru, Tambakoso, Kec. Waru, Kab. Sidoarjo, Jawa Timur 61256 Phone: +62 31 3592 9091 Whatsapp: +62 811 1210 6803 Email: sales.sby@mfk.co.id

□ BALI

Jl. Sunset Road No.108b, Kec. Kuta Kab. Badung. Bali - Indonesia 80361 Phone: +62 361 934 2633 Whatsapp: +62 811 1210 6803 Email: sales.bali@mfk.co.id

☐ SERVICE CENTER

JI. Kamal raya No.9 Unit G, RT 01/RW 06 Tegal Alur. Cengkareng - Indonesia 11820 Phone: +62 21 5595 2523











Whatsapp: +62 811 9144 614 Email: service.center@mfk.co.id