



SHOWCASE



GC-B SERIES

CURVED SHOWCASE

Features

The whole machine adopts double-layer tempered glass, beautiful and safe.

Imported famous refrigeration accessories, safe and reliable.


The unique air duct design makes temperature inside more uniform.

Intelligent temperature control, more comfortable to use.

Front glass with heating element.



Model		SC-12	SC-15	SC-18
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	480	560	790
Net Volume	[L]	231	291	356
Net weight	[kg]	125	148	184
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2-8		
Ambient Environment		Temp30°C/Humidity65°C		
Bottom material		Electrostatic Spraying/Vacuum Coating/Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	680	680	680
Height	[mm]	1200	1200	1200



GC-B SERIES

UPRIGHT SHOWCASE



Features

- Double, hollow, tempered glass. Double insulating glass increases thermal insulation performance and saves energy consumption; Tempered glass is safe and reliable, and its strength is 5 times that of ordinary glass
- Imported famous refrigeration accessories, safe and reliable.
- The front glass with heating film and controlled with independent switch.
- Humanized design, personalized customization. Length size, color style, lighting color temperature can be customized according to the needs.
- The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		SC-12-S	SC-15-S	SC-18-S
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	480	560	790
Net Volume	[L]	246	310	379
Net weight	[kg]	125	148	184
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2-8		
Ambient Environment		Temp30°C/Humidity65°C		
Bottom material		Electrostatic Spraying/Vacuum Coating/Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	680	680	680
Height	[mm]	1200	1200	1200



MK SERIES

UPRIGHT SHOWCASE



Features

The whole machine adopts double-layer tempered glass (arc glass is reinforced glass), beautiful and safe.


Embraco Compressor, Jingchuang thermostat.

Unique air duct design, more balanced temperature in the cabinet.

Front glass with heating element.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		MK-12-S	MK-15-S	MK-18-S
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.63	0.74	0.89
Net Volume	[L]	320	395	475
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2~8	2~8	2~8
Refrigerant		R404A/R290	R404A/R290	R404A/R290
Ambient Environment		Temp 30°C / Humidity 55%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	760	760	760
Height	[mm]	1385	1385	1385



MK SERIES

CURVED SHOWCASE



Features

The whole machine adopts double-layer tempered glass (arc glass is reinforced glass), beautiful and safe.

Embraco Compressor, Jingchuang thermostat.

Unique air duct design, more balanced temperature in the cabinet.

Front glass with heating element.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		MK-12	MK-15	MK-18
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.63	0.74	0.89
Net Volume	[L]	309	366	430
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2~8	2~8	2~8
Refrigerant		R404A/R290	R404A/R290	R404A/R290
Ambient Environment		Temp 30°C / Humidity 55%		
Bottom Material		Electrostatic Spraying / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	760	760	760
Height	[mm]	1385	1385	1385



MK SERIES

FRONT OPENING UPRIGHT SHOWCASE



Features

The whole machine adopts double-layer tempered glass, beautiful and safe.

Front door design, easy to access.

Embraco Compressor, Jingchuang thermostat.

Unique air duct design, more balanced temperature in the cabinet.

Front glass with heating element.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		MKQ-12-S	MKQ-15-S	MKQ-18-S
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.63	0.74	0.89
Net Volume	[L]	320	395	475
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2~8	2~8	2~8
Refrigerant		R404A /R290	R404A /R290	R404A /R290
Ambient Environment		Temp 30°C / Humidity 55%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	760	760	760
Height	[mm]	1385	1385	1385



GC SERIES

CURVED SHOWCASE



Features

- Super white glass, the light transmittance is as high as 92%, good display effect.
- Aluminum alloy sliding doors are less noisy and smoother
- Imported famous refrigeration accessories, safe and reliable.
- Unique air duct design, more balanced temperature in the cabinet.
- Intelligent temperature control, more comfortable to use.
- Electric heating demisting, no fog on the glass.
- The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		GC-08
Voltage	[V/Hz]	220V/50Hz
Power	[kW]	0.48
Net Volume	[L]	107
Cooling Type		Ventilated
Temperature Range	[°C]	2~8
Refrigerant		R134A/R290
Ambient Environment		Temp 30°C / Humidity 65%
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble
Exterior Dimension		
Length	[mm]	800
Width	[mm]	680
Height	[mm]	1170

GC SERIES

CURVED SHOWCASE



Features

The whole machine adopts double-layer tempered glass (arc glass is reinforced glass), beautiful and safe.

Imported famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Front glass with heating element.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		GC-12	GC-15	GC-18
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.42	0.5	0.74
Net Volume	[L]	193	227	265
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2~8	2~8	2~8
Refrigerant		R134A/R290	R134A/R290	R134A/R290
Ambient Environment		Temp 30°C / Humidity 55%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	680	680	680
Height	[mm]	1170	1170	1170



GC SERIES

UPRIGHT SHOWCASE



Features

The whole machine adopts double-layer tempered glass, beautiful and safe.

Imported famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Front glass with heating element.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		GC-12-S	GC-15-S	GC-18-S
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.42	0.5	0.74
Net Volume	[L]	204	240	280
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2~8	2~8	2~8
Refrigerant		R134A/R290	R134A/R290	R134A/R290
Ambient Environment		Temp 30°C / Humidity 55%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	680	680	680
Height	[mm]	1170	1170	1170



KFS SERIES

OPEN TYPE SHOWCASE



Features

The whole machine adopts super white glass, beautiful and safe.

Front door design, easy to access.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		KFS-08-B	KFS-10-B	KFS-12-B
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.48	0.511	0.67
Net Volume	[L]	150	187	203
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	5-10	5-10	5-10
Refrigerant		R404A	R404A	R404A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	800	1000	1200
Width	[mm]	900	900	900
Height	[mm]	1250	1250	1250



KFS SERIES

SANDWICH SHOWCASE



Features

The whole machine adopts super white glass, beautiful and safe.

Front door design, easy to access.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		KFS-08	KFS-10	KFS-12
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.53	0.684	0.72
Net Volume	[L]	197	247	293
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	5~10	5~10	5~10
Refrigerant		R404A	R404A	R404A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	800	1000	1200
Width	[mm]	800	800	800
Height	[mm]	1400	1400	1400



KFS-A SERIES

OPEN TYPE SHOWCASE



Features

The whole machine adopts super white glass, beautiful and safe.

Front door design, easy to access.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Intelligent Control



Unique Air Duct



LED Tube

Model		KFS-12-Z-A	KFS-15-Z-A	KFS-18-Z-A
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.678	0.79	0.92
Net Volume	[L]	216	280	315
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	5~10	5~10	5~10
Refrigerant		R404A	R404A	R404A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	900	900	900
Height	[mm]	1250	1250	1250



KFS-B SERIES

OPEN TYPE SHOWCASE



Features

The whole machine adopts super white glass, beautiful and safe.

Front door design, easy to access.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		KFS-12-Z-B	KFS-15-Z-B	KFS-18-Z-B
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.658	0.77	0.9
Net Volume	[L]	195	243	305
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	5~10	5~10	5~10
Refrigerant		R404A	R404A	R404A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Electrostatic Spraying / Vacuum Coating / Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	900	900	900
Height	[mm]	880	880	880



MKW SERIES

SHOWCASE



Features

The whole machine adopts super white glass, beautiful and safe.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Intelligent Control



Unique Air Duct




LED Tube

Model		MKW-12	MKW-15	MKW-18
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.477	0.58	0.694
Net Volume	[L]	67	84	101
Net Weight	[Kg]	143	165	191
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	8~15	8~15	8~15
Refrigerant		R404A	R404A	R404A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Stainless Steel		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	860	860	860
Height	[mm]	1200	1200	1200



MKB SERIES

ICE TABLE

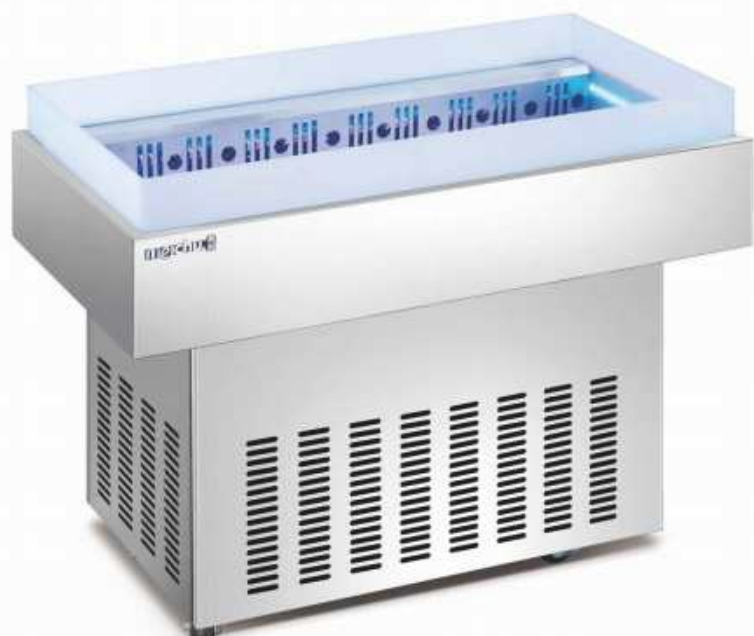

Features

Blue light and fog, increase the display effect.

The whole machine adopts super white glass, beautiful and safe.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		MKB-12	MKB-15	MKB-18
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.33	0.47	0.55
Net Volume	[L]	186	202	218
Net Weight	[Kg]	85	97	114
Cooling Type		Static	Static	Static
Temperature Range	[°C]	-2~0	-2~0	-2~0
Refrigerant		R134A	R134A	R134A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Stainless Steel		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	550	550	550
Height	[mm]	990	990	990



MK SERIES

BOUTIQUE CABINET



Features

Double, hollow, tempered glass. Double insulating glass increases thermal insulation performance and saves energy consumption; Tempered glass is safe and reliable, and its strength is 5 times that of ordinary glass.

45° corner glass has better display effect, and the glass has the function of removing fog by electroplating. With independent control switch.

Humanized design, personalized customization. Length size, color style, light color temperature can be exclusively customized according to demand.



Model		MK-12-JP2	MK-15-JP2	MK-18-JP2
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	820	900	1000
Net Volume	[L]	340	422	505
Net weight	[kg]	240	290	360
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2-8		
Ambient Environment		Temp30°C/Humidity65°C		
Bottom material		Electrostatic Spraying/Vacuum Coating/Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	800	800	800
Height	[mm]	1100	1100	1100



BOUTIQUE

SHOWCASE WITH DRAWERS



Features

Double, insulated and tempered glass. Double display insulating glass can increase the heat preservation and insulation performance, reduce energy consumption; this kind of tempered glass is safe and reliable, the strength is 5 times of ordinary glass.

45" corner glass display effect is better, the glass with electroplated film heating demisting function, and with independent control switch.

The lower part is equipped with room temperature storage cabinet, which can be used for placing items and has high space utilization rate,

Humanized design, personalized customization.

Length and size, color style and light color temperature can be customized according to requirements.



Model		MK-12-CT	MK-15-CT	MK-18-CT
Power supply		220V/50Hz		
Volume	[L]	185	230	280
Net weight	[kg]	230	280	350
Refrigeration method		Air cooling	Air cooling	Air cooling
Temperature range	[]	2~8	2~8	2~8
Usage environment		Environmental temperature: 30 /humidity: 65%		
Bottom material		Marble/electrostatic spraying/vacuum coating		
Dimensions				
Length	[mm]	1200	1500	1800
Width	[mm]	800	800	800
Height	[mm]	1100	1100	1100

LS-A SERIES

UPRIGHT SHOWCASE



Features

Overall foaming, save energy .


Large volume, more practical.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		LS-12-A	LS-15-A	LS-18-A
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.66	0.82	0.9
Net Volume	[L]	520	610	720
Net Weight	[Kg]	200	234	275
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2-8	2-8	2-8
Refrigerant		R134A	R134A	R404A
Ambient Environment		Temp 30°C / Humidity 65%		
Bottom Material		Vacuum Coating		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	800	800	800
Height	[mm]	1900	1900	1900



LS-B SERIES

UPRIGHT SHOWCASE



Features

Front open design is convenient for self-picking, back sliding door for adding exhibits.

The whole machine adopts super white glass, beautiful and safe.

Famous refrigeration accessories, safe and reliable.

Unique air duct design, more balanced temperature in the cabinet.

Intelligent temperature control, more comfortable to use.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		LS-12-B	LS-15-B	LS-18-B
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	1.21	1.4	1.673
Net Volume	[L]	450	557	685
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	8~12	8~12	8~12
Refrigerant		R404A	R404A	R404A
Ambient Environment		Temp 25°C / Humidity 65%		
Bottom Material		Electrostatic Spraying / Vacuum Coating		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	800	800	800
Height	[mm]	1900	1900	1900



LS-C SERIES

UPRIGHT DRINK SHOWCASE



Features

Double, hollow, tempered glass. Double insulating glass increases thermal insulation performance and saves energy consumption; Tempered glass is safe and reliable, and its strength is 5 times that of ordinary glass.

Imported famous refrigeration accessories, safe and reliable.

The glass with heating film and controlled with independent switch.

Humanized design, personalized customization. Length size, color style, lighting color temperature can be customized according to the needs.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		LS-12-C	LS-15-C	LS-18-C
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	980	1200	1650
Net Volume	[L]	407	590	730
Net weight	[kg]	260	330	408
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2-8		
Ambient Environment		Temp30°C/Humidity65°C		
Bottom material		Electrostatic Spraying/Vacuum Coating/Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	720	720	720
Height	[mm]	1900	1900	1900



LS-D SERIES

UPRIGHT DRINK SHOWCASE



Features


Double, hollow, tempered glass. Double insulating glass increases thermal insulation performance and saves energy consumption; Tempered glass is safe and reliable, and its strength is 5 times that of ordinary glass.

Imported famous refrigeration accessories, safe and reliable.

The glass with heating film and controlled with independent switch.

Humanized design, personalized customization. Length size, color style, lighting color temperature can be customized according to the needs.

The cooling system can be pulled out to facilitate cleaning and maintenance.



Model		LS-12-D	LS-15-D	LS-18-D
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	980	1200	1650
Net Volume	[L]	407	590	730
Net weight	[kg]	260	330	408
Cooling Type		Ventilated	Ventilated	Ventilated
Temperature Range	[°C]	2-8		
Ambient Environment		Temp30°C/Humidity65°C		
Bottom material		Electrostatic Spraying/Vacuum Coating/Marble		
Exterior Dimension				
Length	[mm]	1200	1500	1800
Width	[mm]	720	720	720
Height	[mm]	1900	1900	1900



UPRIGHT

DRINKS SHOWCASE



Features

It adopts built-in door handles, beautiful and atmospheric

Variable lighting, adjust the color according to different displays,

Extra large volume to make the most of space

Imported spare parts, good refrigeration effect

Glass door with heating film, automatic defrost, display visual well



Model		LS-06	LS-12-2	LS-16-3
Voltage		220V/50Hz		
power	[kW]	0.63	0.73	0.96
volume	[L]	290	660	910
Number of shelves		5	5	5
Refrigerant		R134a	R404A	R404A
Refrigeration method		Air cooling	Air cooling	Air cooling
temperature range	[C]	2~5	2~5	2~5
Usage environment		Environmental temperature: 30 ° C		
Appearance material		Vacuum coating		
Internal material		Inner box 201 # mirror finish/ brushed 201 # shelves		
Defrosting method		Natural defrosting		
Overall dimensions				
length	[mm]	600	1200	1500
width	[mm]	700	700	700
Height	[mm]	1800	1800	1800



MBG SERIES

BREAD SHOWCASE



MBG-A



MBG-B



MBG-C

Features

- The whole machine adopts super white glass, beautiful and safe.
- The front and back sliding doors are convenient for adding exhibits, and more convenient for customers to pick up.
- Humanized design, personalized customization.
- The length, size and appearance color can be customized according to the demand.
- The lighting adopts 12V low voltage warm light, safe and reliable.
- With a food rack, convenient for customers to pick up the exhibits. There is a locker underneath.
- The shelf can be customized and disassembled.

Model		MBG-A	MBG-B	MBG-C
Voltage	[V/Hz]	220V/50Hz		
Power	[kW]	0.24	0.196	0.184
Net Volume	[L]	695	663	663
Net Weight	[Kg]	113	102	106
Ambient Environment		Temp 30°C / Humidity 65%		
Bottom Material		Aluminium Alloy		
Exterior Dimension				
Length	[mm]	2000	2000	2000
Width	[mm]	900	1000	1000
Height	[mm]	1400	1450	1450





PT MULTI FLASHINDO KARISMA

□ JAKARTA

Jl. Hayam Wuruk 114 Blok A No.4,
Maphar. Jakarta - Indonesia 11160
Phone: +62 21 626 8758
Whatsapp: +62 811 1210 6803
Email: sales.dept@mfk.co.id

□ SURABAYA

Ruko Royal Crown Palace RA 2
Jl. H. Anwar Hamzah, Kp. Baru, Tambakoso,
Kec. Waru, Kab. Sidoarjo, Jawa Timur 61256
Phone: +62 31 3592 9091
Whatsapp: +62 811 1210 6803
Email: sales.sby@mfk.co.id

□ BALI

Jl. Sunset Road No.108b, Kec. Kuta
Kab. Badung, Bali - Indonesia 80361
Phone: +62 361 934 2633
Whatsapp: +62 811 1210 6803
Email: sales.bali@mfk.co.id

□ SERVICE CENTER

Jl. Kamal raya No.9 Unit G, RT 01/RW 06
Tegal Alur, Cengkareng - Indonesia 11820
Phone: +62 21 5595 2523
Whatsapp: +62 811 9144 614
Email: service.center@mfk.co.id