



COMMERCIAL COOKING



HUIQUAN



GZ SERIES STOVE WITH DOUBLE BURNER DOUBLE WATER WARMER


Features

1. Enviromental protection, Tangshifu burner
2. Easy to operate
3. Refractory brick furnace.
4. Guangdong Yongqiang brand fan motor 250w
5. Electronic ignition, customized brand flameout protector
6. Customized modular piping with pressure stabilization system

TECHNICAL DATA

Dimensions	mm	2000*1000*800+350*100
Gas Consumption		
LNG	m ³ /h	5.21*2
LPG	kg/h	3.2*2
Noise	db	103
Cooking ring	mm	350
Heat load	kw	48
Height of front	cm	44
Time for 5kg water heated to 100°C: 2' 42"		

Product Three Views

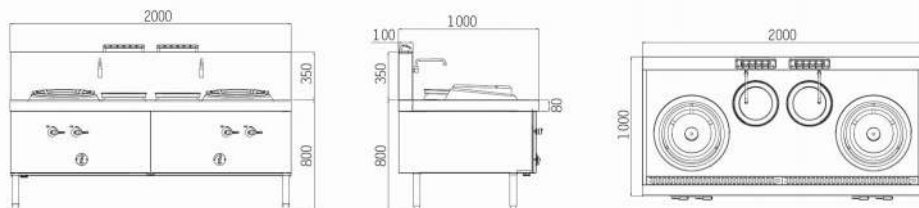




GZ SERIES STOVE WITH DOUBLE BURNER SINGLE WATER WARMER

TECHNICAL DATA

Dimensions	mm	1800*1000*800+350*100
Gas Consumption		
LNG	m ³ /h	5.21*2
LPG	kg/h	3.2*2
Noise	db	103
Cooking ring	mm	350
Heat load	kw	48
Height of front	cm	44
Time for 5kg water heated to 100°C: 2' 42"		



Product Three Views

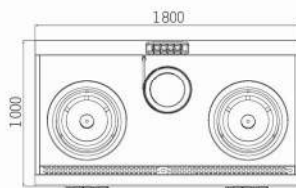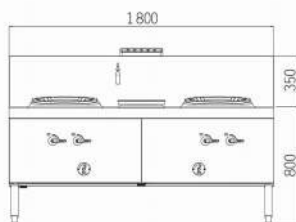




GZ SERIES STOVE WITH SINGLE BURNER SINGLE WATER WARMER

TECHNICAL DATA

Dimensions	mm	1100*1000*800+350*100
Gas Consumption		
LNG	m ³ /h	5.21*2
LPG	kg/h	3.2*2
Noise	db	103
Cooking ring	mm	350
Heat load	kw	48
Height of front	cm	44
Time for 5kg water heated to 100°C: 2' 42"		



Product Three Views





GZ SERIES STOVE WITH DOUBLE LARGE WOK


Features

1. Environmental protection, high efficiency burner
2. Easy to operate
3. Refractory and high temperature furnace
4. Customized stainless steel silent energy-saving and high-efficiency burner
5. Guangdong Yongqiang brand fan motor 180w
6. Electronic ignition, customized brand flameout protector
7. Customized modular piping with pressure stabilization system

TECHNICAL DATA

Dimensions	mm	2100*1150*800+350*100
Gas Consumption		
LNG	m ³ /h	4.5*2
LPG	kg/h	3.2*2
Noise	db	68
Cooking ring	mm	800
Heat load	kw	48
Height of front	cm	44
Time for 5kg water heated to 100°C: 13' 12"		

Product Three Views

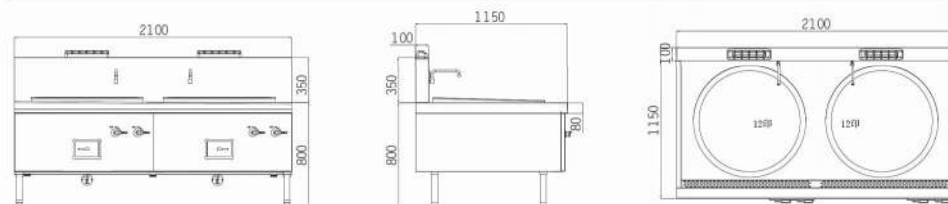



Waterproof Design



Anti high temperature



Easy maintenance



Antioxidative

GZ SERIES STOVE WITH SINGLE LARGE WOK


Features

1. Environmental protection, high efficiency burner
2. Easy to operate
3. Refractory and high temperature furnace
4. Customized stainless steel silent energy-saving and high-efficiency burner
5. Guangdong Yongqiang brand fan motor 180w
6. Electronic ignition, customized brand flameout protector

TECHNICAL DATA

Dimensions	mm	1100*1150*800+350*100
Gas Consumption		
LPG	m ³ /h	4.5
LPG	kg/h	3.2
Noise	db	68
Cooking ring	mm	800
Heat load	kw	48
Height of front	cm	44
Time for 5kg water heated to 100°C: 13' 12"		

Product Three Views

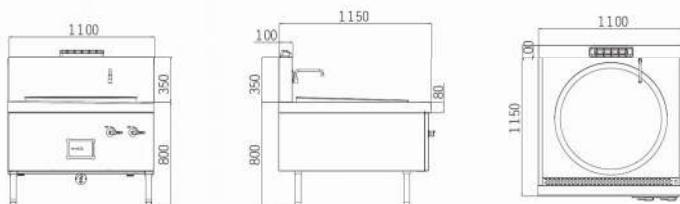





Waterproof Design



Anti high temperature



Easy maintenance



Antioxidative

GZ H1 SERIES STOVE WITH DOUBLE BURNER DOUBLE WATER WARMER




Product Performance

Customized stainless steel silent energy-saving and high-efficiency burner
Customized ductile iron furnace box, integral refractory furnace
Fire starter linkage electronic ignition design, easy to operate
Guangdong Yongqiang 120W fan, standard electronic ignition, customized
Jing brand flameout protector
Customized modular cast lead pipes with dual pressure stabilization system
Waterproof quick plug design, which is safe and reliable
Install drainage device, easy to maintain and not easy to clog

Product Three Views

TECHNICAL DATA

Dimensions	mm	2000*1150*800+400*100
Gas Consumption		
LNG	m ³ /h	3*2
LPG	kg/h	2.5*2
Noise	db	68
Cooking ring	mm	350
Heat load	kw	40
Height of front	cm	44
Time for 5kg water heated to 100°C: 2' 40"		

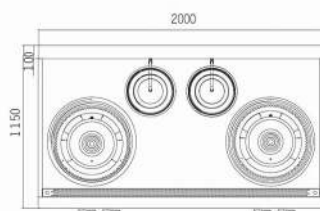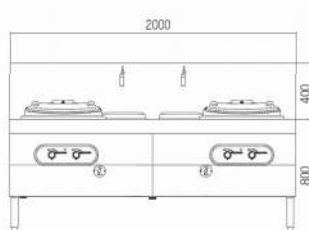




GZ H1 SERIES STOVE WITH DOUBLE BURNER SINGLE WATER WARMER

Product Performance

Customized stainless steel silent energy-saving and high-efficiency burner
 Customized ductile iron furnace box, integral refractory furnace
 Fire starter linkage electronic ignition design, easy to operate
 Guangdong Yongqiang 120W fan, standard electronic ignition, customized
 Jing brand flameout protector
 Customized modular cast lead pipes with dual pressure stabilization system
 Waterproof quick plug design, which is safe and reliable
 Install drainage device, easy to maintain and not easy to clog

Product Three Views

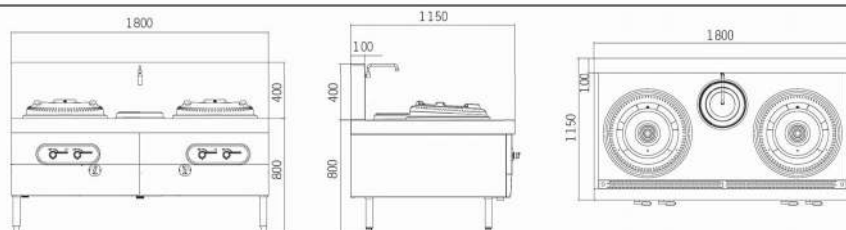

TECHNICAL DATA

Dimensions	mm	1800*1150*800+400*100
Gas Consumption		
LNG	m ³ /h	3*2
LPG	kg/h	2.5*2
Noise	db	68
Cooking ring	mm	350
Heat load	kw	40
Height of front	cm	44
Time for 5kg water heated to 100°C: 2' 40"		



Waterproof Design



Anti high temperature



Easy maintenance



Antioxidative

GZ H1 SERIES STOVE WITH SINGLE BURNER SINGLE WATER WARMER




Product Performance

Customized stainless steel silent energy-saving and high-efficiency burner
Customized ductile iron furnace box, integral refractory furnace
Fire starter linkage electronic ignition design, easy to operate
Guangdong Yongqiang 120W fan, standard electronic ignition, customized Jing brand flameout protector
Customized modular cast lead pipes with dual pressure stabilization system
Waterproof quick plug design, which is safe and reliable
Install drainage device, easy to maintain and not easy to clog

Product Three Views

TECHNICAL DATA

Dimensions	mm	1200*1150*800+400*100
Gas Consumption		
LNG	m ³ /h	3
LPG	kg/h	2.5
Noise	db	68
Cooking ring	mm	350
Heat load	kw	40
Height of front	cm	44
Time for 5kg water heated to 100°C: 2' 40"		





JFH SERIES STOVE WITH DOUBLE BURNER DOUBLE WATER WARMER



Waterproof Design



Anti high temperature



Easy maintenance



Antioxidative




Product Performance

The stove adopts a stainless steel waterproof design, equipped with a reflector plate to fully retain heat, and ensure more complete combustion. Corrosion-resistant, high-temperature resistant, easy to maintain and not easily blocked. The unique processing technique allows the burner to heat the entire bottom of the pot without any blind spots during combustion. The furnace chamber is cast from ductile iron, making it resistant to high temperatures and oxidation, and durable without easy cracking. Stainless steel, silent, energy-efficient and efficient burner, equipped with a Guangdong Yong gong 120W fan with heat reflector plate. Standard features include one-touch electronic ignition and a branded flameout.

TECHNICAL DATA

Dimensions	mm	2000*1000*800+350*100
Gas Consumption		
LNG	m ³ /h	4.21*2
LPG	kg/h	2.0*2
Noise	db	68
Cooking ring	φ	350
Heat load	kw	30
Height of front	cm	38
Time for 5kg water heated to 100°C: 2' 37"		

Product Three Views

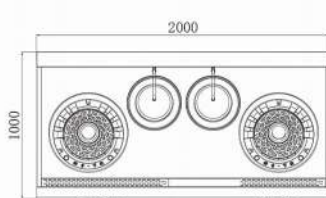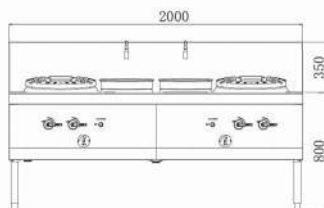




JFH SERIES STOVE WITH DOUBLE BURNER SINGLE WATER WARMER

TECHNICAL DATA

Dimensions	mm	1800*1000*800+350*100
Gas Consumption		
LNG	m ³ /h	4.21*2
LPG	kg/h	2.0*2
Noise	db	68
Cooking ring	φ	350
Heat load	kw	30
Height of front	cm	38
Time for 5kg water heated to 100°C: 2' 37"		



Product Three Views

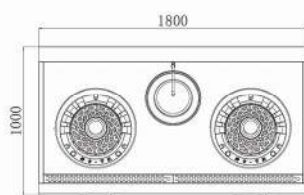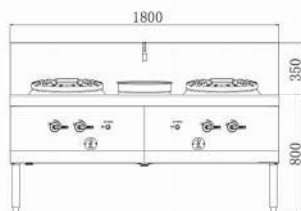




JFH SERIES STOVE WITH SINGLE BURNER SINGLE WATER WARMER

TECHNICAL DATA

Dimensions	mm	1100*1000*800+350*100
Gas Consumption		
LNG	m ³ /h	4.21
LPG	kg/h	2.0
Noise	db	68
Cooking ring	φ	350
Heat load	kw	30
Height of front	cm	38
Time for 5kg water heated to 100°C: 2' 37"		



Product Three Views



XQG SERIES

Commercial Gas Stove



Waterproof design



Anti high temperature



Easy maintenance



Antioxidative

XQG SERIES WITH DOUBLE BURNER DOUBLE WATER WARMER




Features

The stove head adopts stainless steel waterproof design, which is safer and burns fully. Anti-corrosion and high temperature resistance, easy to maintain, not easy to clog. Unique processing technology allows the burner to fully cover the bottom of the pot during the combustion process, without heating and blind spots. The stove is made of ductile iron, which is resistant to high temperature and oxidation, durable and not easy to crack. Customized stainless steel silent energy-saving and efficient burner. Guangdong Yongqiang 120W fan, standard one-button start electronic ignition. Customized brand flameout protector.

Product Three Views

TECHNICAL DATA

Dimensions	mm	1800*800*800+270/50
Gas Consumption		
LNG	m ³ /h	2.53*2
LNP	kg/h	2.0*2
Noise	db	65
Cooking Ring	φ	300
Heat Load	kw	30
Height of front	cm	30
Time for 5kg water heated to 100°C: 3' 12"		

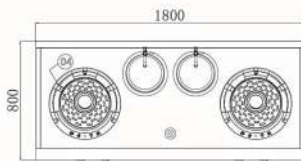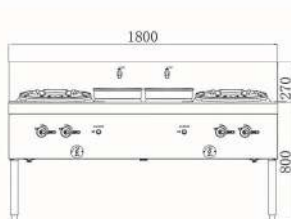


XQG SERIES WITH DOUBLE BURNER SINGLE WATER WARMER

TECHNICAL DATA		
Dimensions	mm	1500*800*800+270/50
Gas Consumption		
LNG	m ³ /h	2.53*2
LNP	kg/h	2.0*2
Noise	db	65
Cooking Ring	φ	300
Heat Load	kw	30
Height of front	cm	30
Time for 5kg water heated to 100°C: 3' 12"		



Product Three Views

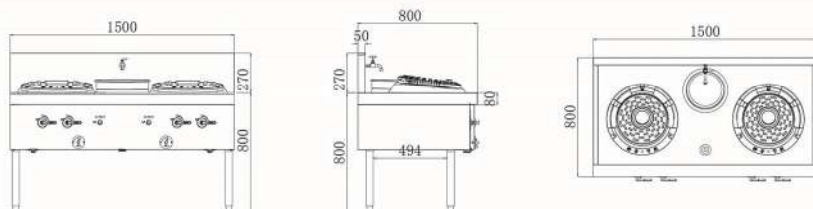


XQG SERIES WITH SINGLE BURNER SINGLE WATER WARMER

TECHNICAL DATA		
Dimensions	mm	900*800*800+270/50
Gas Consumption		
LNG	m ³ /h	2.53
LNP	kg/h	2.0
Noise	db	65
Cooking Ring	φ	300
Heat Load	kw	30
Height of front	cm	30
Time for 5kg water heated to 100°C: 3' 12"		



Product Three Views

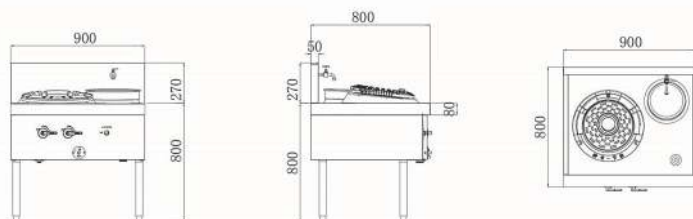

FOUR-BURNER GAS STOVE



Powerful burner with strong flames, standard electronic ignition, flameout protection, new exquisite stove basin, cast iron octagonal burner head, low combustion noise. The entire cast iron stove pan is aesthetically pleasing and easy to clean. Upward-tilted and stretchable countertop



TECHNICAL DATA

Dimensions	mm	750*800*800+150
Gas Consumption		
LNG	m ³ /h	0.5
LPG	kg/h	0.3
Noise	db	50
Cooking ring	mm	30
Heat load	kw	6
Height of front	cm	26.5

Product Three Views



SIX-BURNER GAS STOVE




Powerful burner with strong flames, standard electronic ignition, flameout protection, new exquisite stove basin, cast iron octagonal burner head, low combustion noise. The entire cast iron stove pan is aesthetically pleasing and easy to clean. Upward-tilted and stretchable countertop



TECHNICAL DATA

Dimensions	mm	1100*800*800+150
Gas Consumption		
LNG	m ³ /h	0.5*2
LPG	kg/h	0.3*2
Noise	db	50
Cooking ring	mm	30
Heat load	kw	6
Height of front	cm	26.5

Product Three Views




AIR-ENHANCED LOW SOUP STOVE SERIES


Powerful and environmentally friendly, efficient burner; electronic ignition with flame linkage design for easy operation; firebrick furnace chamber, branded burner, Guangdong Yongqiang 120W fan; standard electronic ignition, custom branded flameout protector. Custom modular pipeline with stabilizing system

		SINGLE WOK	DOUBLE WOK
Dimensions	mm	650*750*500+290+60	1300*750*500+290+60
Gas Consumption			
LNG	m³/h	2.8	2.8*2
LPG	kg/h	2.3	2.3*2
Noise	dB	55	55
Cooking ring	mm	50	50
Heat load	kw	35	35
Height of front	cm	30	30

Product Three Views

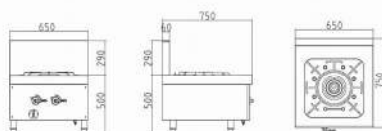

Air-Enhanced Single Wok Low Soup Stove

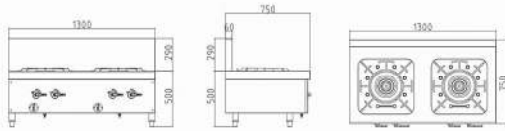

Air-Enhanced Double Wok Low Soup Stove

SELF-SUCTION LOW SOUP STOVE SERIES


Powerful burner with strong flames.

Low combustion noise.


Overall cast iron stove pan, aesthetically pleasing and easy to clean.

		SINGLE WOK	DOUBLE WOK
Dimensions	mm	650*750*500+290+60	1300*750*500+290+60
Gas Consumption			
LNG	m³/h	1.8	1.8*2
LPG	kg/h	0.8	0.8*2
Noise	db	50	50
Cooking ring	mm	50	50
Heat load	kw	18	18
Height of front	cm	30	30

Product Three Views

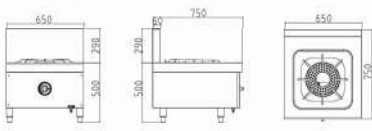

Self-Suction Single Wok Low Soup Stove

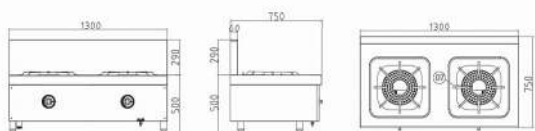

Self-Suction Double Wok Low Soup Stove






HUICI SERIES INDUCTION COOKER

ADD magnetic electric engine, digital drive, suitable for various Kitchen environments, ensuring the safety and reliability of the equipment. PPS "tooth" shaped wire reel assembly, uniform magnetic field distribution, small heat loss, no biased fire, no wire reel burning. Made of all stainless steel, sturdy and durable, three-proof structure, waterproof, anti-smoke, and anti-insect. Alloy material fire adjustment handle, ergonomic design, silicone anti-slip pad, clear gear position and good feel.



HUICI INDUCTION COOKER WITH DOUBLE BURNER DOUBLE WATER WARMER

Product Three Views

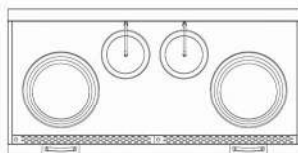

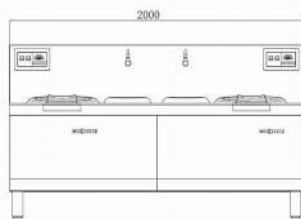


		HCXCL-2000	HCXCL-1800	HCXCL-1000
Voltage / Frequency	V/Hz	380V/50Hz		
Power	kW	15*2	15*2	15
Spares included		Equipped with $\phi 500$ electric cooker	Equipped with $\phi 500$ electric cooker	Equipped with $\phi 500$ electric cooker
Power Connection		Connection Terminal	Connection Terminal	Connection Terminal
Power Cable Required		3*6mm live wire+1*4mm ground wire (2 sets)	3*6mm live wire+1*4mm ground wire (2 sets)	3*6mm live wire+1*4mm ground wire (2 sets)
Dimension	Length	2000	1800	1100
	Width	1000	1000	1000
	Height	800+400	800+400	800+400



HUICI INDUCTION COOKER WITH DOUBLE BURNER SINGLE WATER WARMER

Product Three Views






		HCXCL-2000	HCXCL-1800	HCXCL-1000
Voltage / Frequency	V/Hz	380V/50Hz		
Power	kW	15*2	15*2	15
Spares included		Equipped with $\phi 500$ electric cooker	Equipped with $\phi 500$ electric cooker	Equipped with $\phi 500$ electric cooker
Power Connection		Connection Terminal	Connection Terminal	Connection Terminal
Power Cable Required		3*6mm live wire+1*4mm ground wire (2 sets)	3*6mm live wire+1*4mm ground wire (2 sets)	3*6mm live wire+1*4mm ground wire (2 sets)
Dimension	Length	2000	1800	1100
	Width	1000	1000	1000
	Height	800+400	800+400	800+400



HUICI INDUCTION COOKER WITH SINGLE BURNER SINGLE WATER WARMER

Product Three Views




		HCXCL-2000	HCXCL-1800	HCXCL-1000
Voltage / Frequency	V/Hz	380V/50Hz		
Power	kW	15*2	15*2	15
Spares included		Equipped with $\phi 500$ electric cooker	Equipped with $\phi 500$ electric cooker	Equipped with $\phi 500$ electric cooker
Power Connection		Connection Terminal	Connection Terminal	Connection Terminal
Power Cable Required		3*6mm live wire+1*4mm ground wire (2 sets)	3*6mm live wire+1*4mm ground wire (2 sets)	3*6mm live wire+1*4mm ground wire (2 sets)
Dimension	Length	2000	1800	1100
	Width	1000	1000	1000
	Height	800+400	800+400	800+400



HUICI INDUCTION COOKER WITH SINGLE BURNER WATER WARMER LARGE WOK COMBINATION

Product Three Views

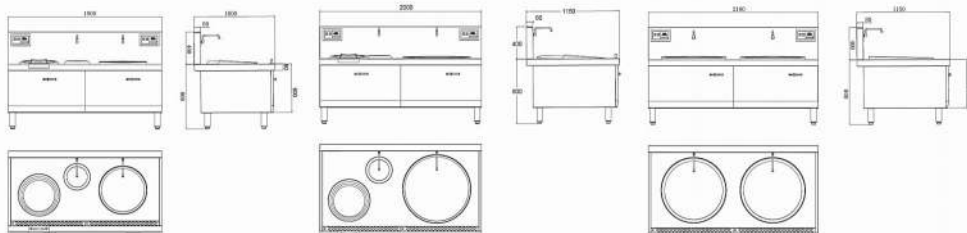

Single Burner Water Warmer
Large Wok Combination(600)

Single Burner Water Warmer
Large Wok Combination (800)


Double Large Woks (800)

HCXCDCL-D600				HCXCDCL-D800			
Voltage		V/Hz	380V/50Hz				
Power		kW	15*2		15+20		
Spares Included			2 pots (φ500 cast iron & φ600 stainless steel)		2 pots (φ500 cast iron & φ800 stainless steel)		
Power Connection			connection terminal		connection terminal		
Required power cable			3*6mm ² live wire+1*4mm ² ground wire (2 sets)		3*6mm ² live wire+1*4mm ² ground wire (2 sets)		
Dimension	Length		1900		2000		
	Width	mm	1000		1150		
	Height		800+400		800+400		



HUICI INDUCTION COOKER WITH SINGLE LARGE WOK

Product Three Views

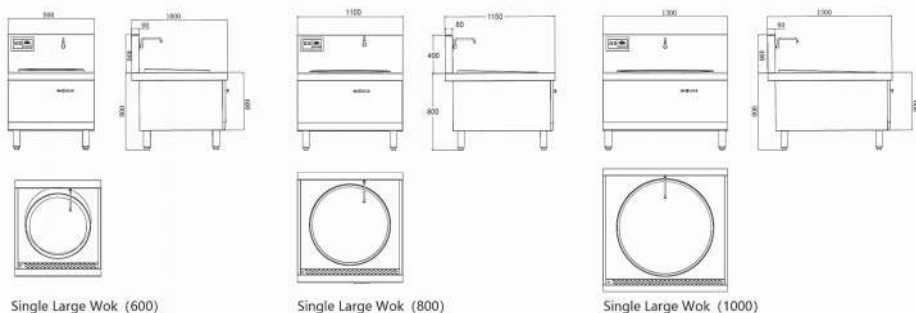

		HCCDCL-D600	HCCDCL-D800	HCCDCL-D1000
Voltage	V/Hz	380V/50Hz		
Power	kW	15	20	30
Spares Included		φ600 stainless steel pot	φ800 stainless steel pot	φ1000 stainless steel pot
Power Connection		connection terminal	connection terminal	connection terminal
Required power cable		3*6mm ² live wire+1*4mm ² ground wire	3*10mm ² live wire+1*6mm ² ground wire	3*10mm ² live wire+1*6mm ² ground wire
Dimension	Length	900	1100	1300
	Width	1000	1150	1300
	Height	800+400	800+400	800+400



DIGITAL CONTROL



S.S BODY





SELF DIAGNOSTIC FAULT

INDUCTION PASTA COOKER WITH SIX BASKETS

TECHNICAL DATA

Voltage	V/Hz	380V/50Hz
Power	kW	15
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	800
	Width	1000
	Height	800+400

Product Three Views



DIGITAL CONTROL



S.S BODY





SELF DIAGNOSTIC FAULT

INDUCTION PASTA COOKER WITH NINE BASKETS

TECHNICAL DATA



Voltage	V/Hz	380V/50Hz
Power	kW	12
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	800
	Width	1000
	Height	800+400

Product Three Views





Product Three Views



DIGITAL CONTROL



S.S BODY



SELF DIAGNOSTIC FAULT





INDUCTION STEAMING COOKER

TECHNICAL DATA

Voltage	V/Hz	380V/50Hz
Power	kW	15
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	800
	Width	mm 1000
	Height	800+400



Product Three Views



DIGITAL CONTROL



S.S BODY



SELF DIAGNOSTIC FAULT

FOUR-BURNER INDUCTION COOKER

TECHNICAL DATA

Voltage	V/Hz	380V/50Hz
Power	kW	2.5*4/3.5*4
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	800
	Width	mm 1000
	Height	800+400





DIGITAL CONTROL S.S. BODY SELF DIAGNOSTIC FAULT

INDUCTION SOUP COOKER WITH DUAL BURNER

HCDTL-S1200

Voltage	V/Hz	380V/50Hz
Power	kW	15*2
Spares included	with $\phi 500$ soup bucket	
Power connection	connection terminal	
Power line	2 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	1200
	Width	750
	Height	550+650

Product Three Views





DIGITAL CONTROL S.S. BODY SELF DIAGNOSTIC FAULT

INDUCTION SOUP COOKER WITH SINGLE BURNER

HCDTL-D700

Voltage	V/Hz	380V/50Hz
Power	kW	15
Spares included	with $\phi 500$ soup bucket	
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	650
	Width	750
	Height	550+650

Product Three Views





DISPLAY SERIES

COMMERCIAL INDUCTION COOKER




SINGLE BURNER INDUCTION COOKER

SINGLE BURNER INDUCTION COOKER		
Voltage	V/Hz	380V/50Hz
Power	kW	15
Spares included	with $\phi 500$ soup bucket	
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground line	
Dimension	Length	800
	Width	800
	Height	800

Product Performance

ADD magneto electric engine, digital drive, multi-level protection, suitable for various kitchen environments, ensuring equipment safety and reliability
PPS toothed wire coil assembly, evenly distributed magnetic field, three proof structure, waterproof, oil fume proof, and insect proof. Aluminum alloy material firepower adjustment handle, ergonomic design, silicone anti slip pad, clear gear position, good hand feel

Product Three Views

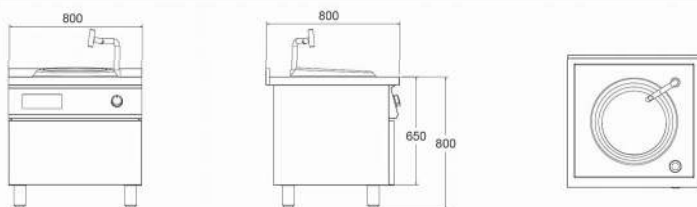



DIGITAL CONTROL



S.S BODY





SELF DIAGNOSTIC FAULT

GRIDDLE OF INDUCTION COOKER

TECHNICAL DATA

Voltage	V/Hz	380V/50Hz
Power	kW	8
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground	
Dimension	Length	800
	Width	800
	Height	800

Product Three Views



DIGITAL CONTROL



S.S BODY




SELF DIAGNOSTIC FAULT

ONE AND TWO TANK DEEP FRYER OF INDUCTION COOKER



TECHNICAL DATA

		ONE TANK	TWO TANK
Voltage	V/Hz	380V/50Hz	
Power	kW	8	8*2
Power connection	connection terminal		
Power line	1 pc 3*6mm ² live line+1*4mm ² ground		
Dimension	Length	400	800
	Width	800	800
	Height	800	800


Product Three Views



TWO TANK



ONE TANK





FOUR-BURNER INDUCTION COOKER

TECHNICAL DATA

Voltage	V/Hz	380V/50Hz
Power	kW	2.5*4/ 3.5*4
Power connection	connection terminal	
Power line	1 pc 3*6mm ² live line+1*4mm ² ground	
Dimension	Length	800
	Width	800
	Height	800



DIGITAL CONTROL





S.S BODY



SELF DIAGNOSTIC FAULT

Product Three Views



ELECTROMAGNETIC

Three-door Steamer



Digital Control



Multi-Certification



Easy Clean





Integral Foam



S.S BODY



Product Three Views



Product Performance

ADD magneto-electric engine, digital drive, multi-level protection, to ensure the safety and reliability of the equipment.

PPS "tooth"-shaped bobbin assembly, uniform distribution of magnetic field. Small heat consumption, no partial fire, no burn bobbin.

All stainless steel production, durable, waterproof, anti-smoke, insect-proof.

Alloy fire adjusting handle, ergonomic design, silicone anti-slip pad, good feel.

Thickened stainless steel bottom welded molding water gallon.

ELECTROMAGNETIC THREE-DOOR STEAMER

Power supply	V/Hz	380/50
Power	kW	25
Water supply pipe diameter		φ15
Drainage pipe diameter		φ15、φ25、φ40
Overall Dimension	Length	900
	Width	900
	Height	1850

Gas Three-door Steamer



Multi-Certification



Easy Clean




Integral Foam



S.S BODY

Product Three Views

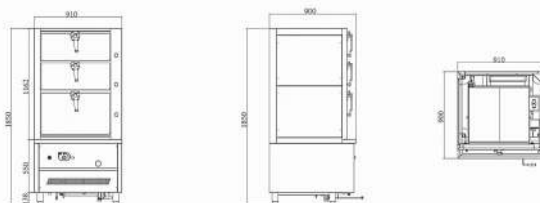

Product Performance

Adopt 2mm stainless steel welding molding water tank.
All parts welded in place, smooth and flat surface.
High-quality stainless steel appearance design, beautiful, clean and sanitary, energy saving and environmental protection.
A variety of gas sources can be selected to ensure that the kitchen under different gas conditions.
Wide range of uses, can steam rice, steamed bread, buns, seafood, etc.
Automatic water inlet, water shortage alarm, flame failure protection, safe and reliable.

GAS THREE-DOOR STEAMER

Gas Pipe Meridian	mm	φ25
Gas pipe diameter	mm	φ25
LPG Pipe Diameter	mm	φ20
Calorific value	Kcal/Hr	51352
Water Pipe Diameter	mm	φ15
Drainage pipe diameter	mm	φ38
Dimensions	Length	910
	Width	900
	Height	1850



3 DRAWER SLIDING DOOR CABINET

Dimension: 1800*700*800mm

Packing size: 1860*760*860mm

Size: Customizable size

Material: 201 or 304

Material thickness: 0.9~1.35mm

Application: Used for storing and placing food and tableware

Features: Made with punched middle layer or flat middle layer, European style feet, and European style handles are used for drawers. This not only meets the user's operating requirements, but is also easy to clean, and maximizes the utilization of space. It is aesthetically pleasing, elegant and scientifically reasonable



SINGLE PASS SLIDING DOOR CABINET

Dimension: 1800*700*800mm

Packing size: 1860*760*860mm

Size: Customizable size

Material: 201 or 304

Material thickness: 0.9~1.35mm

Application: Used for storing and placing food and tableware

Features: Made with punched middle layer or flat middle layer, European style feet, and European style handles are used for drawers. This not only meets the user's operating requirements, but is also easy to clean, and maximizes the utilization of space. It is aesthetically pleasing, elegant and scientifically reasonable



PASS THROUGH SLIDING DOOR CABINET

Dimension: 1800*700*800mm

Packing size: 1860*760*860mm

Size: Customizable size

Material: 201 or 304

Material thickness: 0.9~1.35mm

Application: Used for storing and placing food and tableware

Features: Made with punched middle layer or flat middle layer, European style feet, and European style handles are used for drawers. This not only meets the user's operating requirements, but is also easy to clean, and maximizes the utilization of space. It is aesthetically pleasing, elegant, and scientifically reasonable



DOUBLE SINK SLIDING DOOR CABINET

Dimension: 2000*1050*800mm

Packing size: 2060*1110*860mm

Size: Customizable size

Material: 201 or 304

Material thickness: 0.9-1.35mm



SLIDING DOOR WITH TRASH BIN CABINET

Dimension: 2000*1050*800mm

Packing size: 2060*1110*860mm

Size: Customizable size

Material: 201 or 304

Material thickness: 0.9-1.35mm



FLIP DOOR CUPBOARD

Dimension: 1200*500*1800mm

Packing size: 1260*560*1860mm

Size: Customizable size

Material: 201 or 304

Material thickness: 0.9-1.35mm

Application: Can be used to store drained or disinfected tableware, avoiding secondary contamination of tableware.

Selling point: This product is produced using multi-layer perforated or flat panels inside the cabinet. The door is a triple flip door, and European style feet are used below the cabinet. This not only meets the user's configuration requirements well, but also highlights scientific, reasonable, and humanized creativity.



Sinks

- Fully stainless steel structure including bottom shelf
- Assemble construction, easy to assemble
- Flat package, save space for storage and transportation
- Adjustable feet
- Stamped sink bowl, no welding point
- Hand drainer (left and right optional) with grooved board and a reinforced bar underneath
- 100mm standard splash back
- Premium finishing, easy to clean

Technical parameters

Model	Dimension(mm)
ZZ-DXZ-1270-D	1200*700*850+100
ZZ-DXZ-1260-D	1200*600*850+100
ZZ-DXZ-1870-D	1800*700*850+100
ZZ-DXZ-1860-D	1800*600*850+100



Sinks

- Fully stainless steel structure
- Assemble construction, easy to assemble
- Flat package, save space for storage and transportation
- Adjustable feet
- Stamped sink bowl, no welding point
- Hand drainer (left and right optional) with grooved board (1200mm and more) and a reinforced bar underneath
- 100mm standard splash back
- Premium finishing, easy to clean

Technical parameters

Model	Dimension(mm)
ZZ-DXZ-1070	1000*700*850+100
ZZ-DXZ-1060	1000*600*850+100
ZZ-DXZ-1270	1200*700*850+100
ZZ-DXZ-1260	1200*600*850+100
ZZ-SXZ-1870	1800*700*850+100
ZZ-SXZ-1870	1000*600*850+100



Three sides surrounding sinks

- Fully stainless steel structure including bottom shelf
- Assemble construction, easy to assemble
- Flat package, save space for storage and transportation
- Adjustable feet
- Stamped sink bowl, no welding point
- Hand drainer (left and right optional) with grooved board and a reinforced bar underneath
- 100mm standard splash back
- Premium finishing, easy to clean

Technical parameters

Model	Dimension(mm)
ZZ-SXZ-1670-DQ	1600*700*850+100
ZZ-SXZ-1660-DQ	1600*600*850+100
ZZ-SXZ-1870-DQ	1800*700*850+100
ZZ-SXZ-1860-DQ	1800*600*850+100
ZZ-SXZ-2070-DQ	2000*700*850+100
ZZ-SXZ-2060-DQ	2000*600*850+100
ZZ-SXZY-2070-DQ	2000*700*850+100
ZZ-SXZY-2060-DQ	2000*600*850+100



Stainless steel corner cabinet

- Fully stainless steel structure
- Double layer magnet door, with long hinge
- Stainless steel shelf plate 100mm splash back and
- Adjustable feet

Technical parameters

Dimension(mm)
1000+1000*700*850/100
1000+1000*600*850/100
1000*700*870
1000*600*870



Cutting Table

- Fully stainless steel structure
- Assemble construction, easy to assemble
- Flat package, save space for storage and transportation
- Extra thickness cutting board
- Antivibration feet for better stability
- Variable size available

Technical parameters

Dimension(mm)
500*500*850



Rack and Shelf

- Fully stainless steel structure
- Assemble construction, easy to assemble
- Flat package, save space for storage and transportation.
- Shelf type and tier multi optional
- Adjustable feet

Technical parameters

Dimension(mm)
1000*500*1800
1200*500*1800
1400*500*1800
1500*500*1800
1600*500*1800
1800*500*1800
2000*500*1800
1000*400*1800



Work Table

- Fully stainless steel structure including bottom shelf
- Assemble construction, easy to assemble
- Flat package, save space for storage and transportation
- Adjustable feet splash back optional
- Premium finishing, easy to clean
- Variable size available

Technical parameters

Dimension(mm)

1200*700*850

1400*700*850

1500*700*850

1600*700*850

1800*700*850

2000*700*850



Sliding door sink cabinet

- Fully stainless steel sink cabinet large storage space
- Stainless steel adjustable feet
- Stamped sink bowl, no welding point
- Hand drainer (left and right optional) with grooved board and a reinforced bar underneath
- 100mm standard splash back
- Double layers SS doors, strong and stability

Technical parameters

Model	Dimension(mm)
GS-DX-7070	700*700*850+100
GS-DX-6060	600*600*850+100
GS-DXZ-1070	1000*700*850+100
GS-DXZ-1060	1000*600*850+100
GS-DXZ-1270	1200*700*850+100
GS-DXZ-1260	1200*600*850+100
GS-DXZ-1470	1400*700*850+100
GS-DXZ-1460	1400*600*850+100
GS-DXS-1670	1600*700*850+100
GS-DXS-1660	1600*600*850+100
GS-DXS-1870	1800*700*850+100
GS-DXS-1860	1800*600*850+100
GS-DXS-2070	2000*700*850+100
GS-DXS-2060	2000*600*850+100



Trolley

- Fully stainless steel structure
- Durable wheels and brake as standard

Technical parameters

Dimension(mm)

800*500*940

1000*500*940

1000*600*940

1200*600*940



Hanging Cabinet

- Fully stainless steel structure
- Double layer sliding door, strong and flexible
- Wall mounting support kits supplied as standard
- One layer shelf provide as standard

Technical parameters

Dimension(mm)

1000*400*660

1200*400*660

1400*400*660

1500*400*660

1600*400*660

1800*400*660

2000*400*660



Work Table

- Fully stainless steel structure
- Durable drawer guide with self-closing
- Adjustable feet

Technical parameters

Dimension(mm)
 500*600*870
 500*700*870
 500*600*870+100
 500*700*870+100



Sliding door Cabinet

- Fully stainless steel structure
- Double layer sliding door strong and flexible
- Adjustable shelf with reinforced bar
- Large storage space
- Stainless steel adjustable feet

Technical parameters

Dimension(mm)
 1000*600*1800
 1200*600*1800
 1400*600*1800
 1600*600*1800
 1000*700*1800
 1200*700*1800
 1400*700*1800
 1600*700*1800

**HOT CUPBOARD**

Model	Dimension(mm)	Model	Dimension(mm)
HQ-1060	1000*600*850	HQ-1560	1500*600*850
HQ-1070	1000*700*850	HQ-1570	1500*700*850
HQ-1260	1200*600*850	HQ-1660	1600*600*850
HQ-1270	1200*700*850	HQ-1670	1600*700*850
HQ-1360	1300*600*850	HQ-1860	1800*600*850
HQ-1370	1300*700*850	HQ-1870	1800*700*850
HQ-1460	1400*600*850	HQ-2060	2000*600*850
HQ-1470	1400*700*850	HQ-2070	2000*700*850

Fully stainless steel structure
 Flexible sliding door with 2 layers stainless steel
 Adjustable temperature range 0~85°C
 Indicator light for temperature and power
 One layer adjustable shelf with blow hole
 Internal bottom blowhole plate
 Adjustable feet



HOT CUPBOARD

Model	Dimension(mm)	Model	Dimension(mm)
HQ-1060B	1000*600*850+100	HQ-1560B	1500*600*850+100
HQ-1070B	1000*700*850+100	HQ-1570B	1500*700*850+100
HQ-1260B	1200*600*850+100	HQ-1660B	1600*600*850+100
HQ-1270B	1200*700*850+100	HQ-1670B	1600*700*850+100
HQ-1360B	1300*600*850+100	HQ-1860B	1800*600*850+100
HQ-1370B	1300*700*850+100	HQ-1870B	1800*700*850+100
HQ-1460B	1400*600*850+100	HQ-2060B	2000*600*850+100
HQ-1470B	1400*700*850+100	HQ-2070B	2000*700*850+100

Fully stainless steel structure
 Flexible sliding door with 2 layers stainless steel
 Adjustable temperature range 0~85°C
 Indicator light for temperature and power
 One layer adjustable shelf with drain hole
 Internal bottom blowhole plate
 Adjustable feet



COMMERCIAL RANGE HOOD PURIFICATION INTEGRATED MACHINE


Dimensions: Can be customized according to requirements

Main material: s.s201, s.s304


Plate thickness: 0.9~1.35mm

1. Obvious effect of oil smoke purification, no oil at the air outlet of the duct after purification
2. Large air volume extraction, high efficiency purification, each stove about 2500m³/h.
3. No need to clean the ducts, fans, in saving the user cleaning and maintenance costs at the same time, greatly reducing the risk of pipeline soot fire.
4. Can meet various requirements of environmental protection, no need to install ducts on the external wall to meet the standard of direct low-altitude emissions
5. Easy to clean and maintain, and the maintenance cost is very low.

SYSTEM DIAGRAM OF NORMAL FUME HOOD

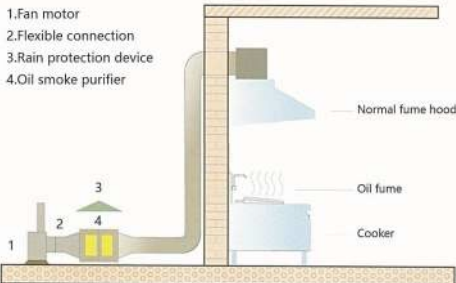

SYSTEM DIAGRAM OF COMMERCIAL RANGE HOOD PURIFICATION INTEGRATED MACHINE

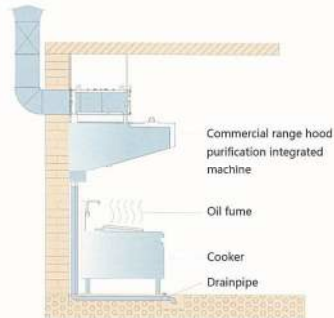



UV FUME HOOD

Dimensions: Can be customized
according to requirements

Main material: s.s201,s.s304



WATER CIRCULATION FUME HOOD

Dimensions: Can be customized
according to requirements

Main material: s.s201,s.s304



S/S BAFFLE GREASE FILTER

Dimensions: Can be customized
according to requirements

Main material: s.s201,s.s304





HUIQUAN

汇泉新制造

PT MULTI FLASHINDO KARISMA

□ JAKARTA (Head Office)

Jl. Hayam Wuruk 114 Blok A No. 4
Maphar, Jakarta - Indonesia 11160
Telepon : +62 21 626 8758
Whatsapp : +62 811 1210 6803
Email : sales.dept@mfk.co.id

□ SURABAYA

Ruko Royal Crown Palace RA 2
Jl. H. Anwar Hamzah, Kp. Baru, Tambakoso,
Kec. Waru, Kab. Sidoarjo, Jawa Timur 61256
Telepon : +62 31 3592 9091
Whatsapp : +62 811 1210 6803
Email : sales.sby@mfk.co.id

□ BALI

Jl. Sunset Road No.108 b, Kec. Kuta
Kel. Badung, Bali - Indonesia 80361
Telepon : +62 361 934 2633
Whatsapp : +62 811 1210 6803
Email : sales.bali@mfk.co.id

□ SERVICE CENTER

Jl. Kamal Raya No.9 Unit B. RT 01/ RW 06
Tegal Alur, Cengkareng - Indonesia 11820
Telepon : +62 21 5595 2523
Whatsapp : +62 811 9144 614
Email : service.center@mfk.co.id